


VOLA 100, 100X, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Monteringsvägledning

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÄF eller Grossist.

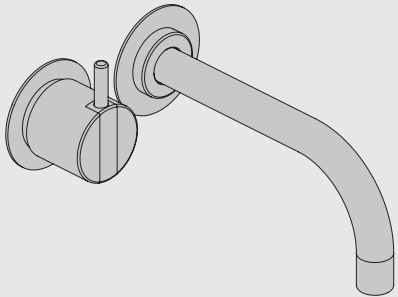

www.vola.com

SE_100-2100_V2 40998364
12-01-2022



Data, 3 Bar/43.5 Psi:


	l/min.	Gal/min.
100:	18,3	4.8
400V:	15,6	4.1
2100:	25,2	6.7
2400V:	22,2	5.9




Max. 65°C, 150°F

Max.: 10 Bar/145 psi


Installasjonsexempel: 2400NV

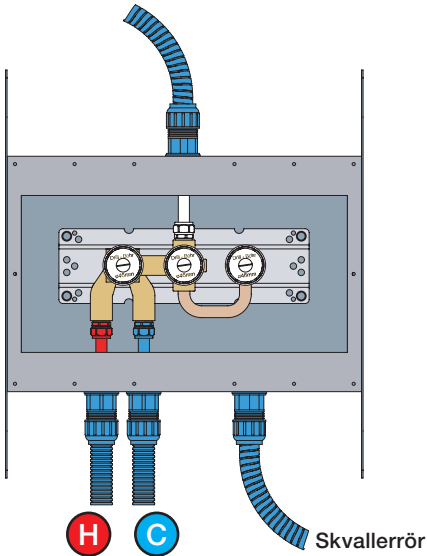


Förlängning



T Min. 15 mm
Max 65 mm



Y Min. 48 mm
Max. 110 mm

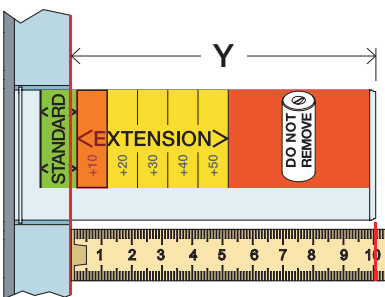

T	Y	VR1260/2260/1400/2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50


Förlängning, eftermontering



* +10 - STANDARD SVERIGE


100 - 400:
62 - 0 mm

X 62 - 0 mm



2100 - 2400:

X 57 - 0 mm




	X	VR1260 + VR1400 + VR2019
	50 - 52 mm	Std.
	40 - 50 mm	+10
	30 - 40 mm	+20
	20 - 30 mm	+30
	10 - 20 mm	+40
	0 - 10 mm	+50


	X	VR2260 + VR1400 + VR2019
	45 - 57 mm	Std.
	35 - 45 mm	+10
	25 - 35 mm	+20
	15 - 25 mm	+30
	5 - 15 mm	+40
	-5 - 5 mm	+50

	L	L1	L2	H
A	220 mm 8 1/2"		-	
B		78 mm 3 1/16"	-	95 mm 3 3/4"
C	318 mm 12 1/2"		-	
D			156 mm 6 1/8"	
E	396 mm 15 1/2"			


A 100, 2100, 200V, 2200V, 400V, 2400V




C 300, 2300

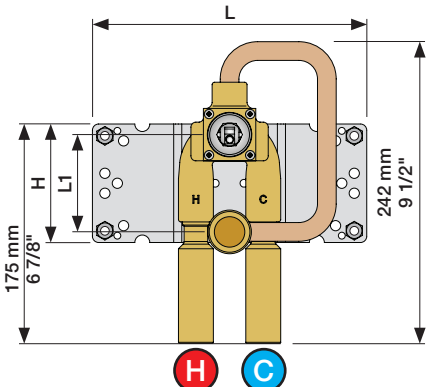


D 400NV, 2400NV, 400TV, 2400TV

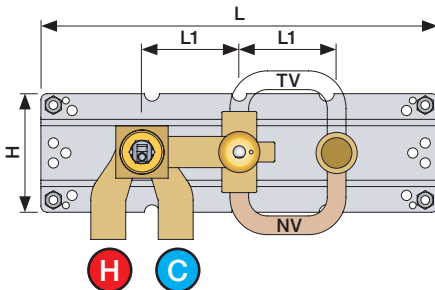

E 400FV, 2400FV, 400RV, 2400RV

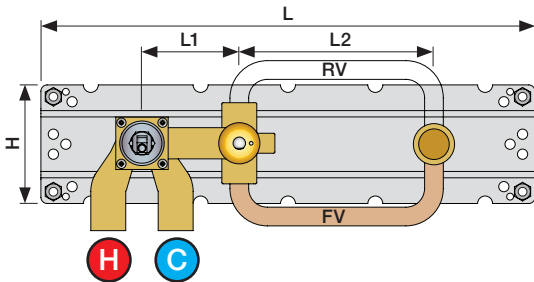


B 100X, 2100X




Montering av förlängning


VR1260+

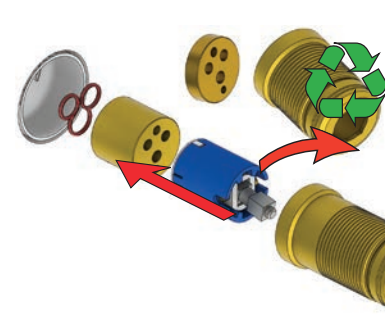

VR2260+

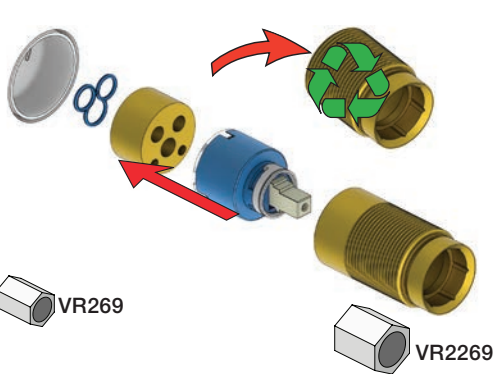


VR2019+, VR2119+

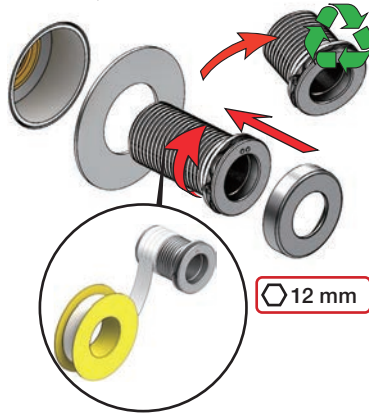

VR1400+












400-2400

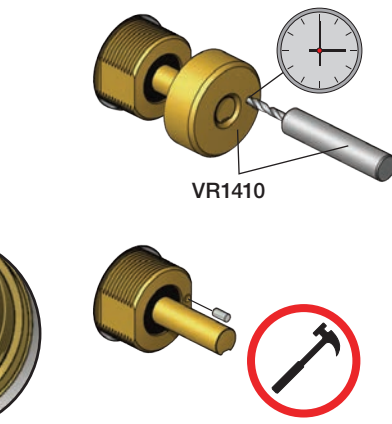

1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.


NB.
Boxen levereras inte av VOLA.
Utan köps genom ÅF eller Grossist.

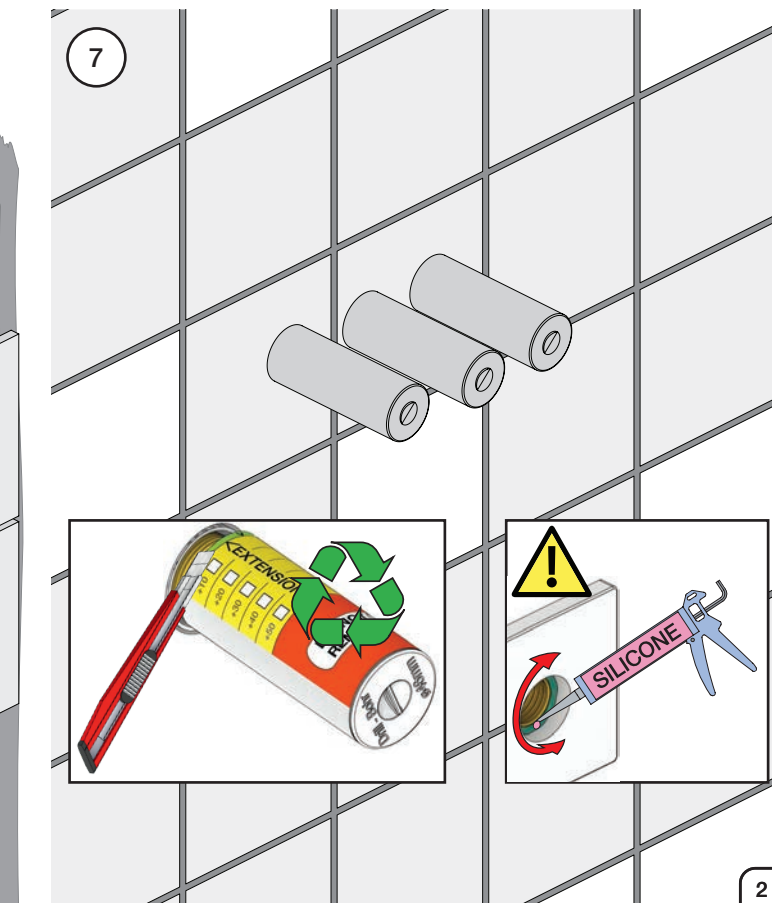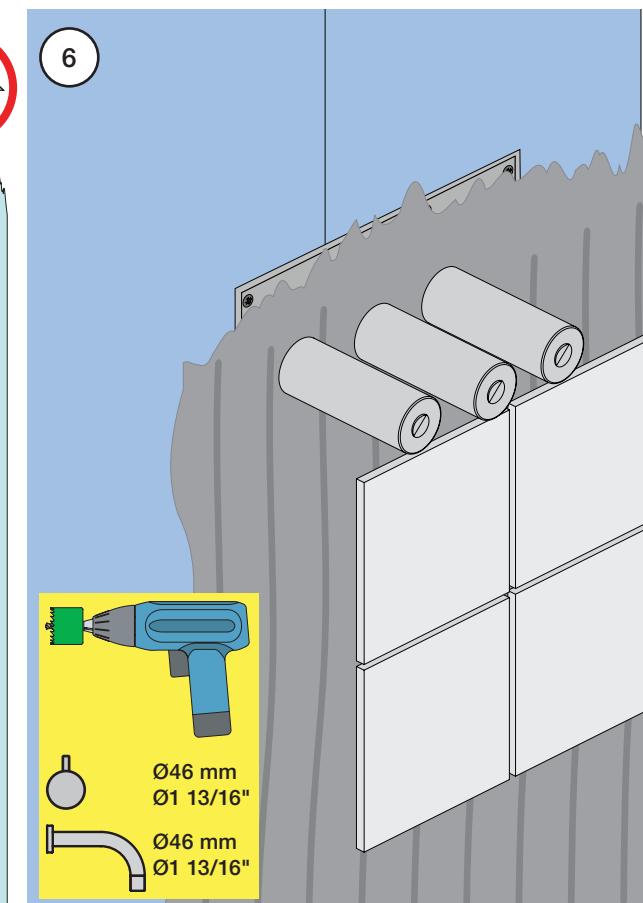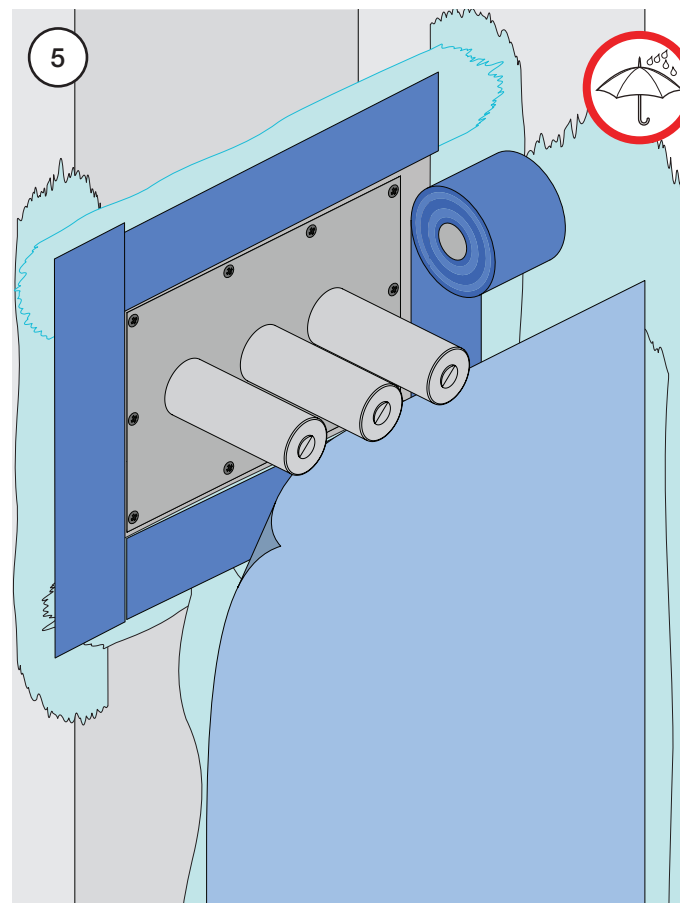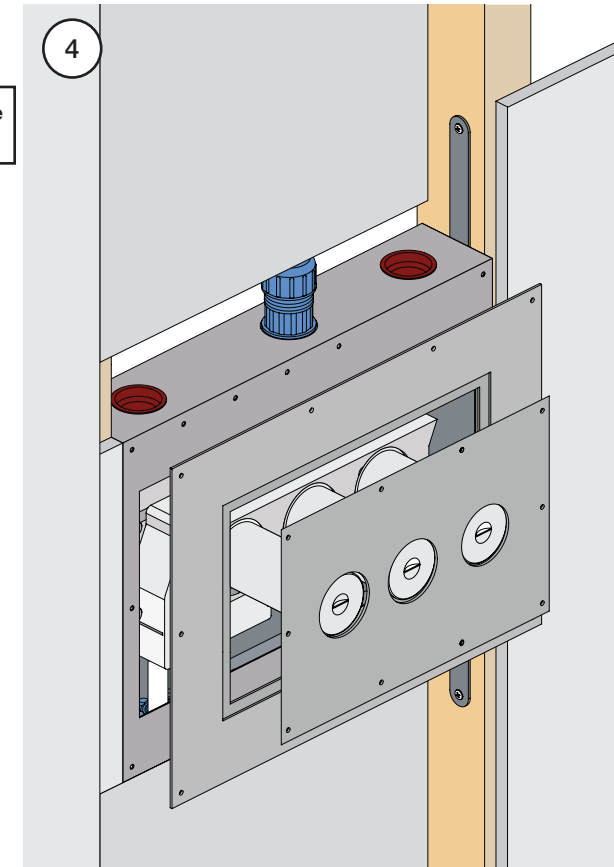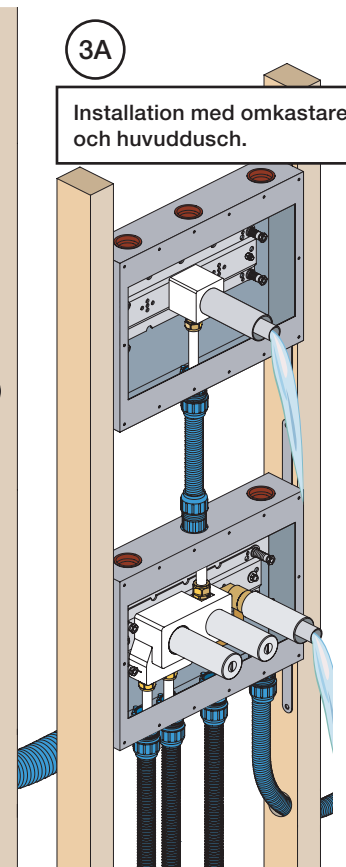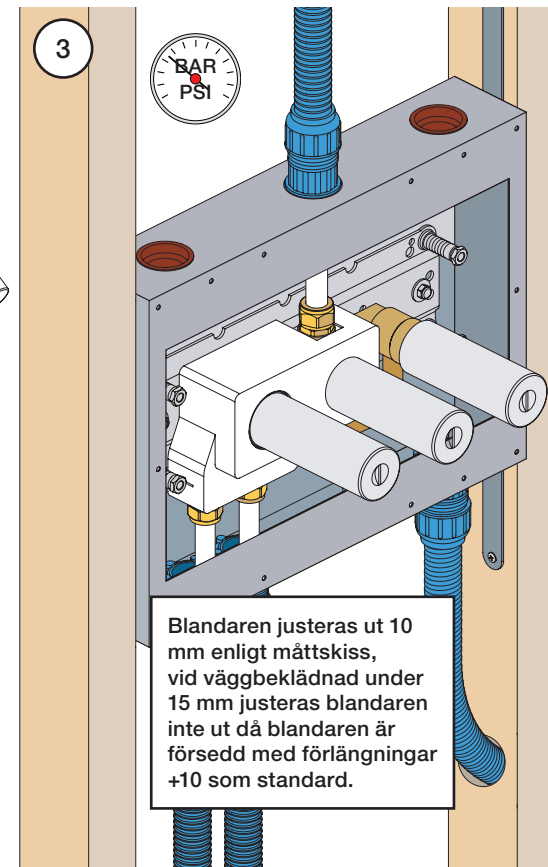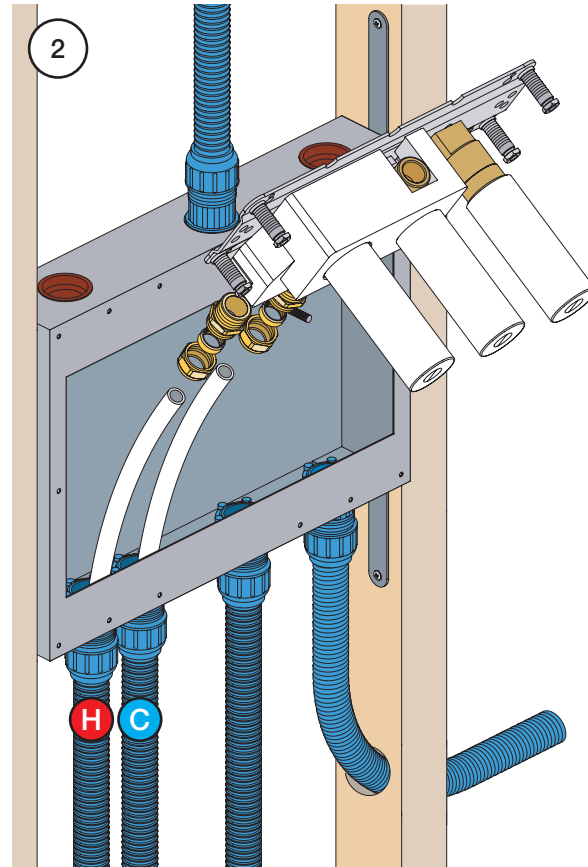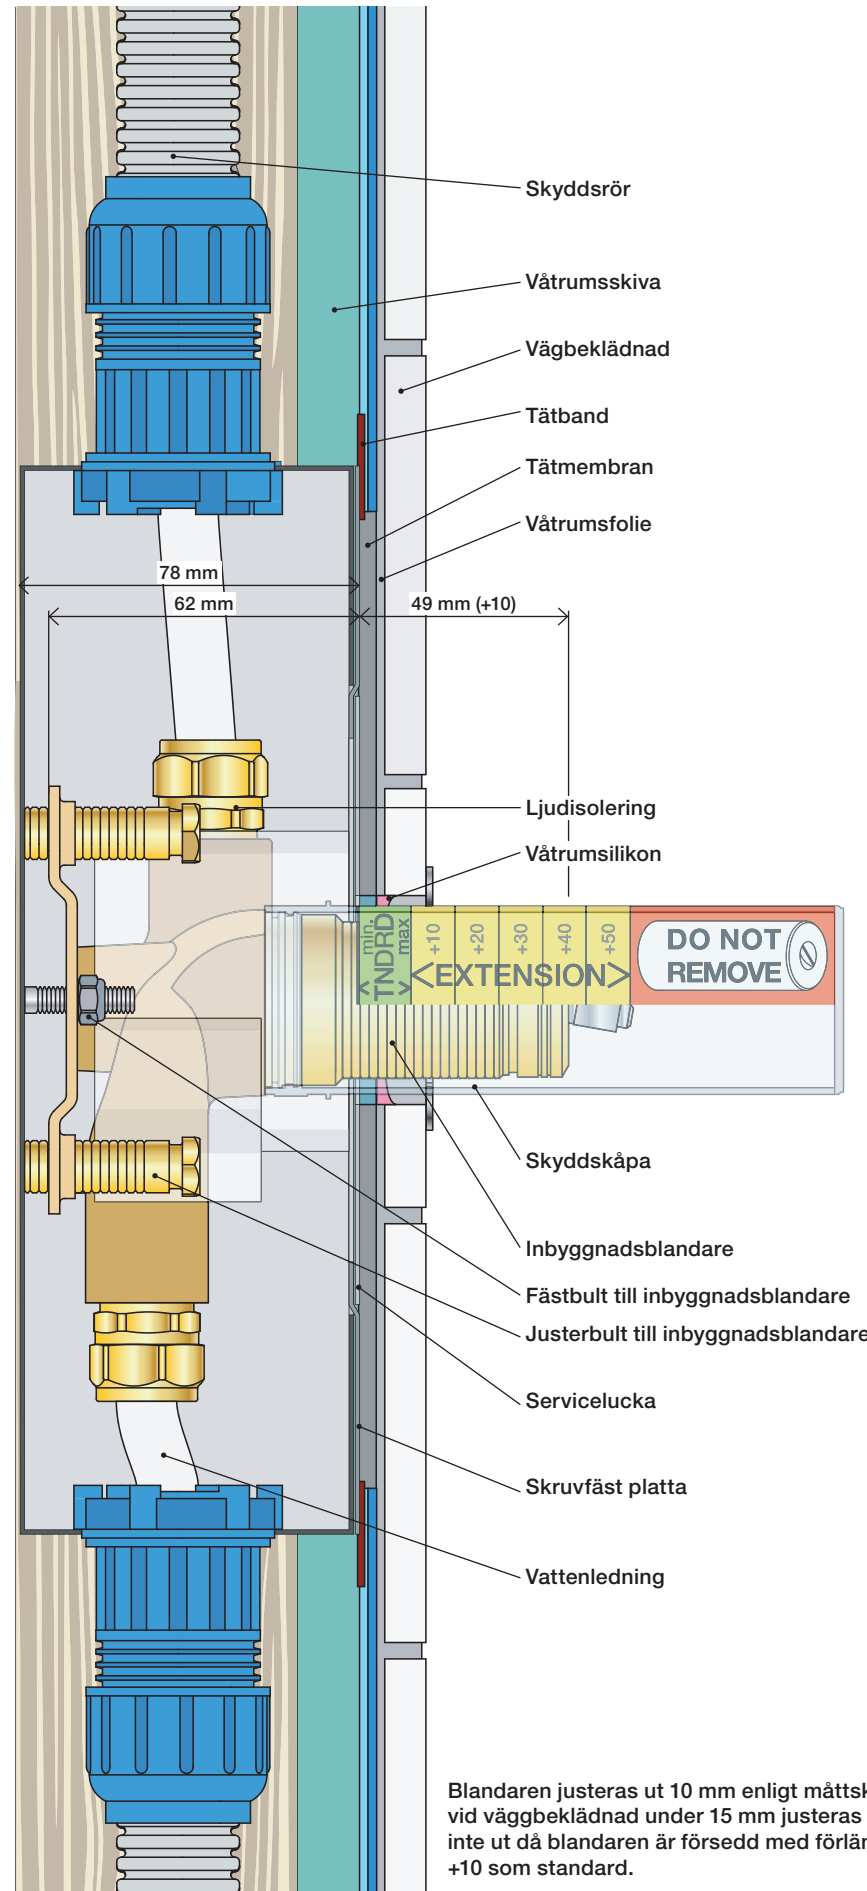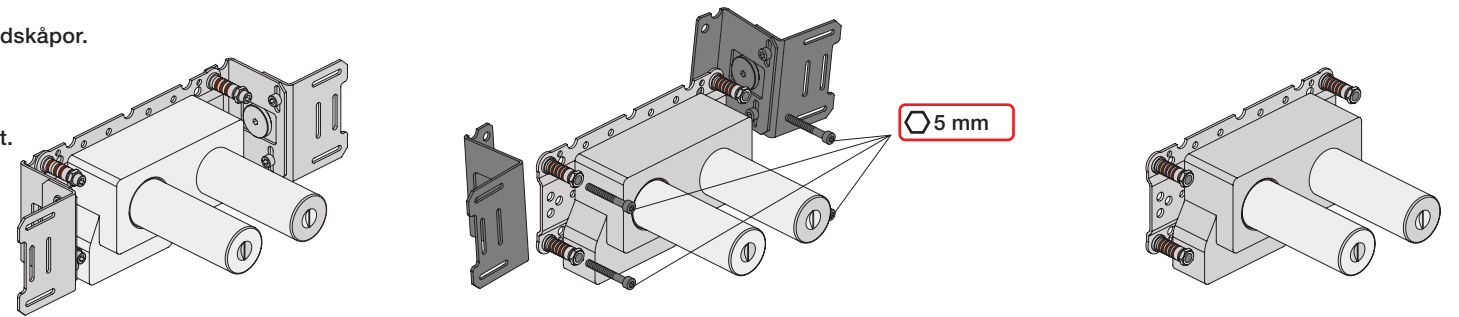

Blandaren justeras ut 10 mm enligt måttskiss, vid vägbeklädnad under 15 mm justeras blandaren inte ut då blandaren är försedd med förlängningar +10 som standard.

VOLA 070, 070R, 070-HT2


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

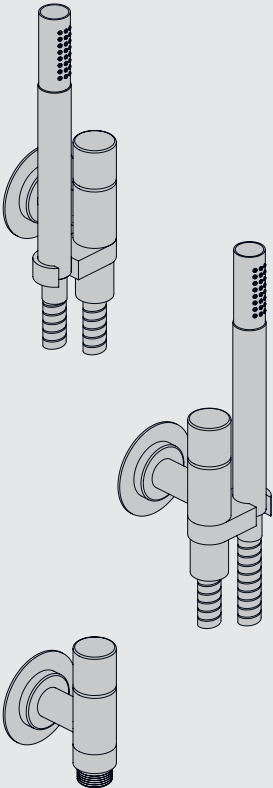



Data	Bar:	1	2	3	4	5
070/070R	(l/min) (Gal/min)	9 2.5	9 2.5	9 2.5	9 2.5	9 2.5
070-HT2	(l/min) (Gal/min)	9 2.5	12 3.2	15 4.0	17 4.5	19 5
	Max. 65°C. 150°F					





VR161:
VR161K: 7 l/min - 1.8 Gal/min (Cal Green)

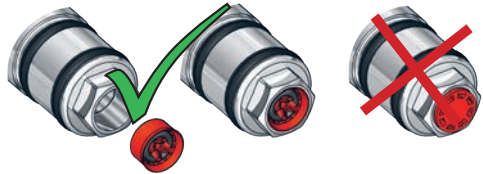


070


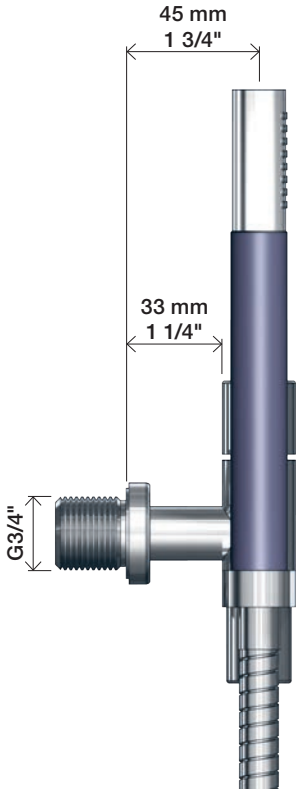
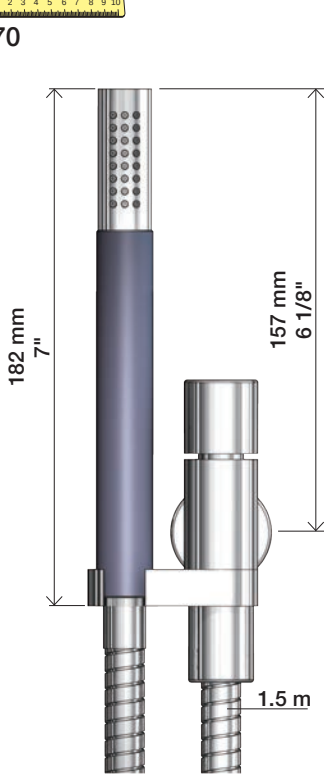


070R

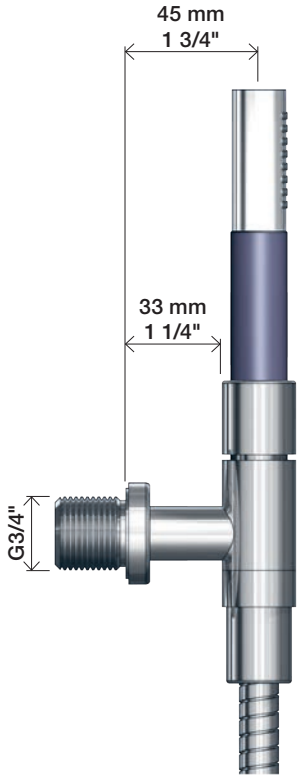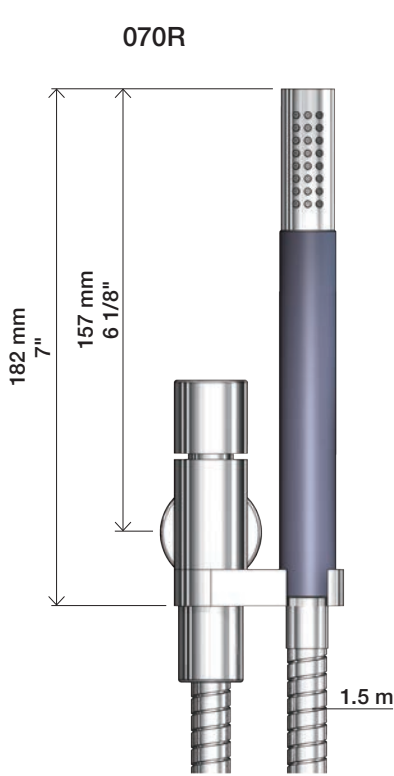

070-HT2



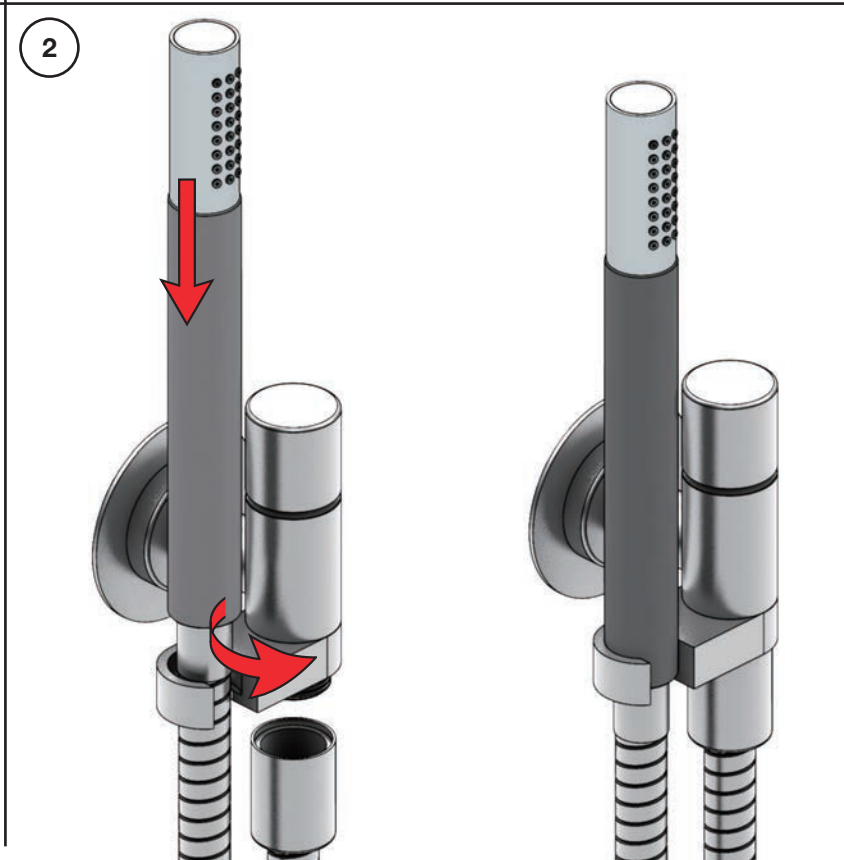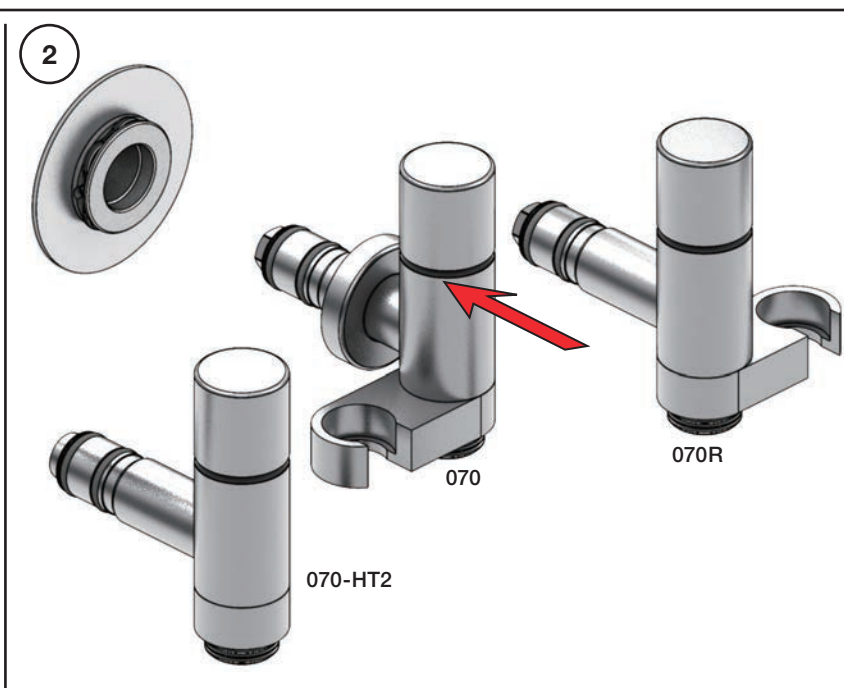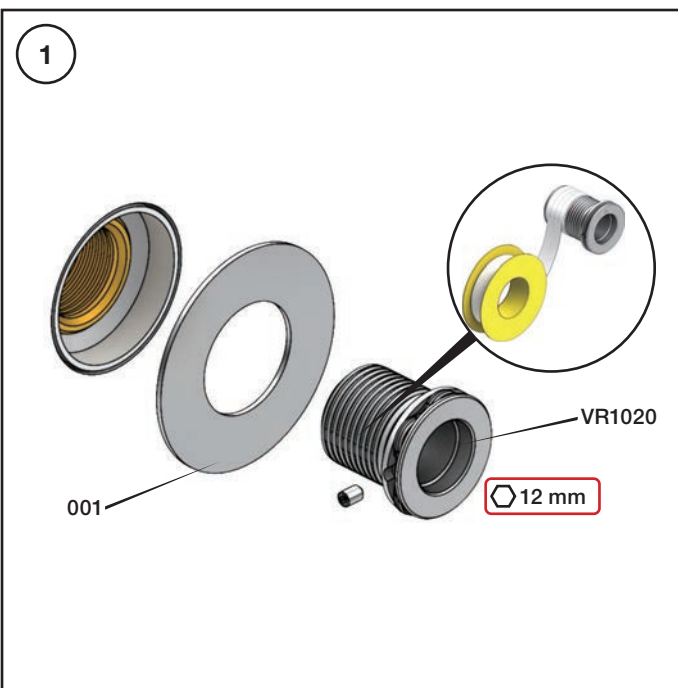



Extension
Verlängerung

Forlængerdele
Förlängning

Verlengstukken
Modification


T Min. 3 mm
Max. 65 mm

Y Min. 48 mm
Max. 110 mm

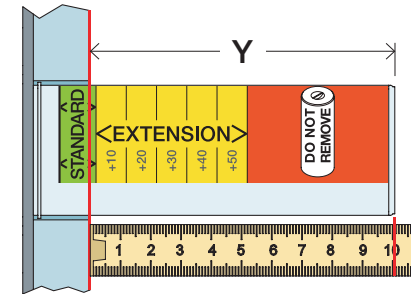


T	Y	VR2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+

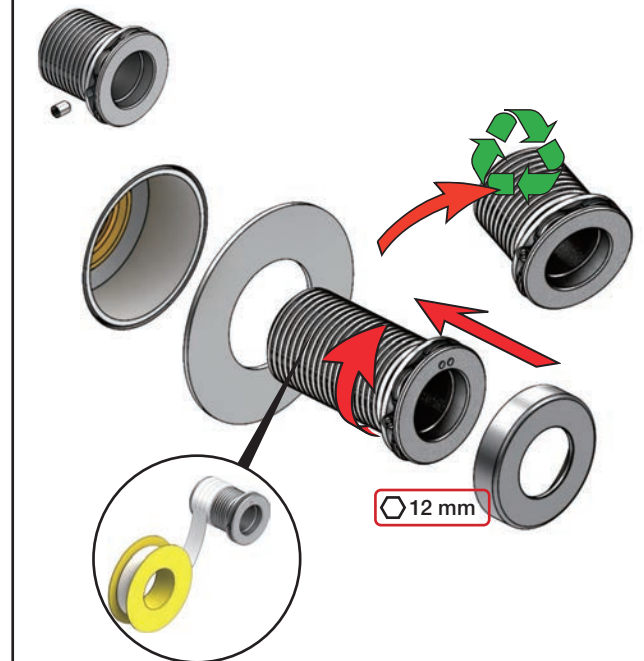


100

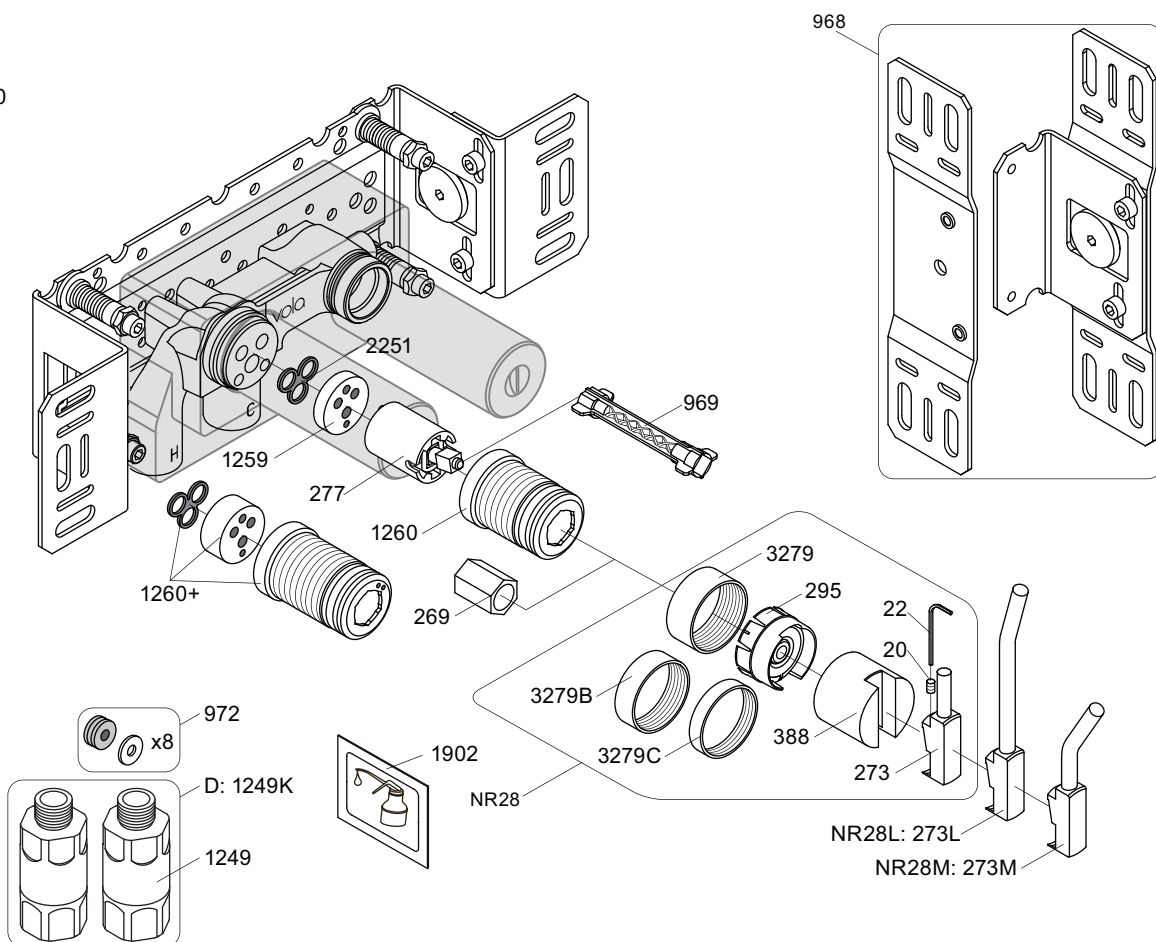


NR28: VR20, VR22, VR269, VR273, VR295, VR388, VR3279, VR3279B, VR3279C
 VR277K: VR22, VR269, VR277
 VR1260: VR1259, VR1260, VR2251


100





100X




200V




300



3002




3003K



3003


-



3002



3001, 001




3001, 001



3001



3001, 001



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 100
 100X, 200V, 300

Date
 May. 22

Rev.
 7

Sheet
 SB 1.2

