


VOLA 100, 100X, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Monteringsvägledning

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÄF eller Grossist.

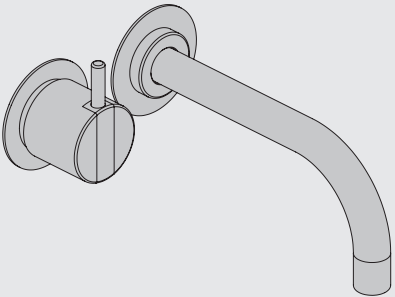

www.vola.com

SE_100-2100_V2 40998364
12-01-2022



Data, 3 Bar/43.5 Psi:


	l/min.	Gal/min.
100:	18,3	4.8
400V:	15,6	4.1
2100:	25,2	6.7
2400V:	22,2	5.9





Max. 65°C, 150°F

Max.: 10 Bar/145 psi


Installasjonsexempel: 2400NV

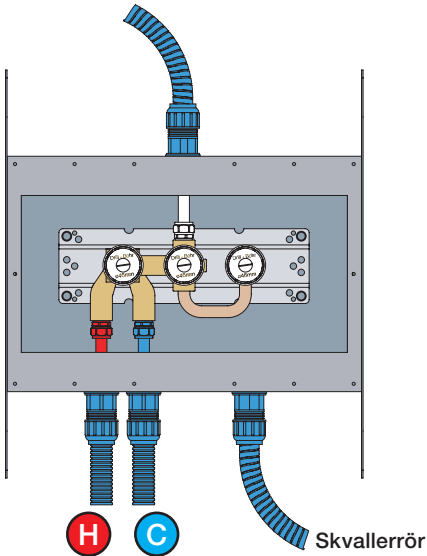


Förlängning



T Min. 15 mm
Max 65 mm



Y Min. 48 mm
Max. 110 mm

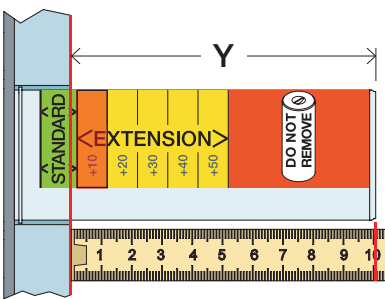

T	Y	VR1260/2260/1400/2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50


Förlängning, eftermontering



* +10 - STANDARD SVERIGE


100 - 400:
62 - 0 mm

X 62 - 0 mm



2100 - 2400:

X 57 - 0 mm




	X	VR1260 + VR1400 + VR2019
	50 - 52 mm	Std.
	40 - 50 mm	+10
	30 - 40 mm	+20
	20 - 30 mm	+30
	10 - 20 mm	+40
	0 - 10 mm	+50


	X	VR2260 + VR1400 + VR2019
	45 - 57 mm	Std.
	35 - 45 mm	+10
	25 - 35 mm	+20
	15 - 25 mm	+30
	5 - 15 mm	+40
	-5 - 5 mm	+50

	L	L1	L2	H
A	220 mm 8 1/2"		-	
B		78 mm 3 1/16"	-	95 mm 3 3/4"
C	318 mm 12 1/2"		-	
D			156 mm 6 1/8"	
E	396 mm 15 1/2"			


A 100, 2100, 200V, 2200V, 400V, 2400V




C 300, 2300

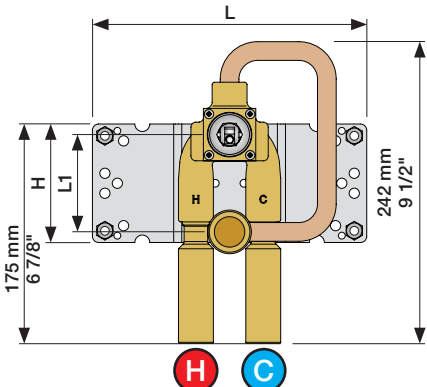


D 400NV, 2400NV, 400TV, 2400TV

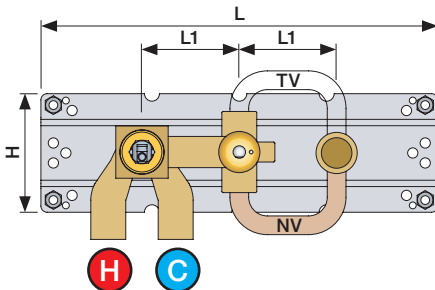

E 400FV, 2400FV, 400RV, 2400RV

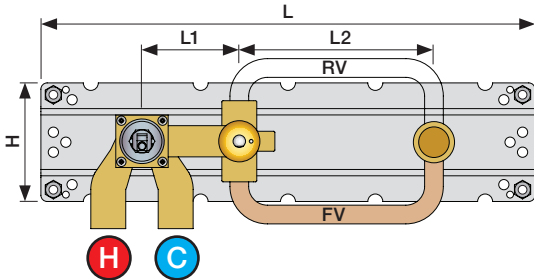


B 100X, 2100X




Montering av förlängning


VR1260+

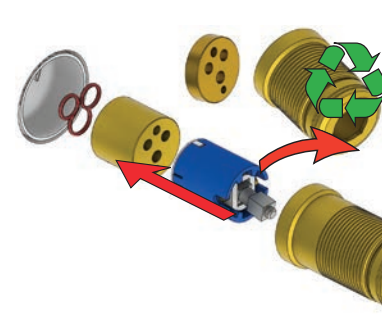

VR2260+

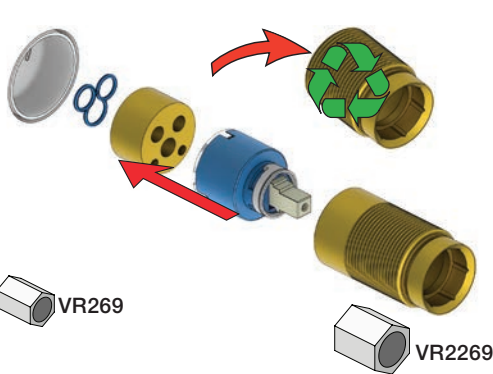


VR2019+, VR2119+

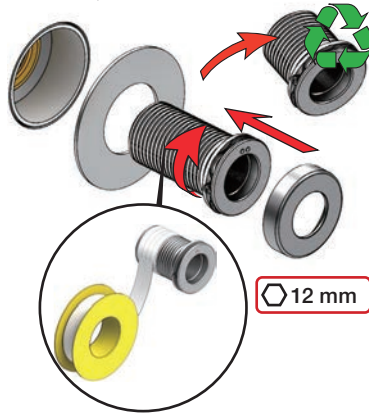

VR1400+












400-2400

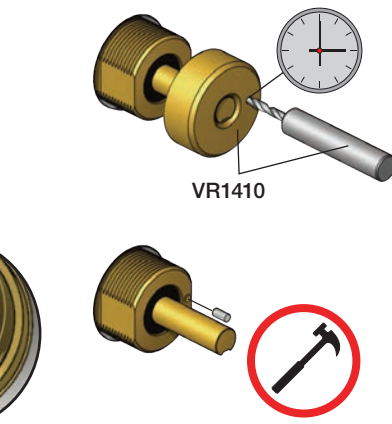


1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÅF eller Grossist.

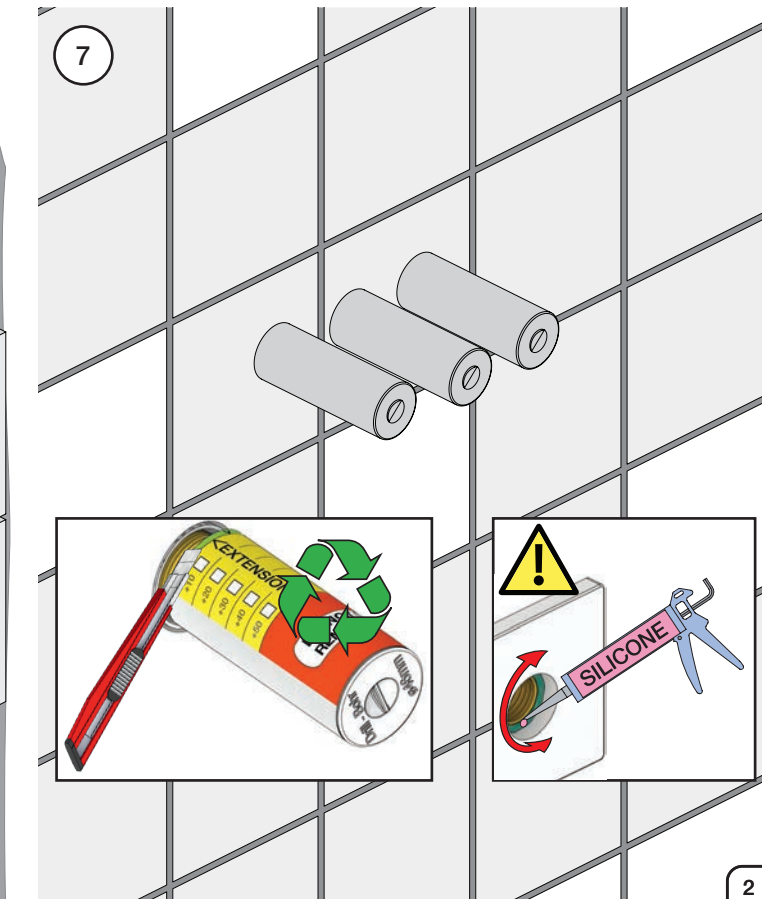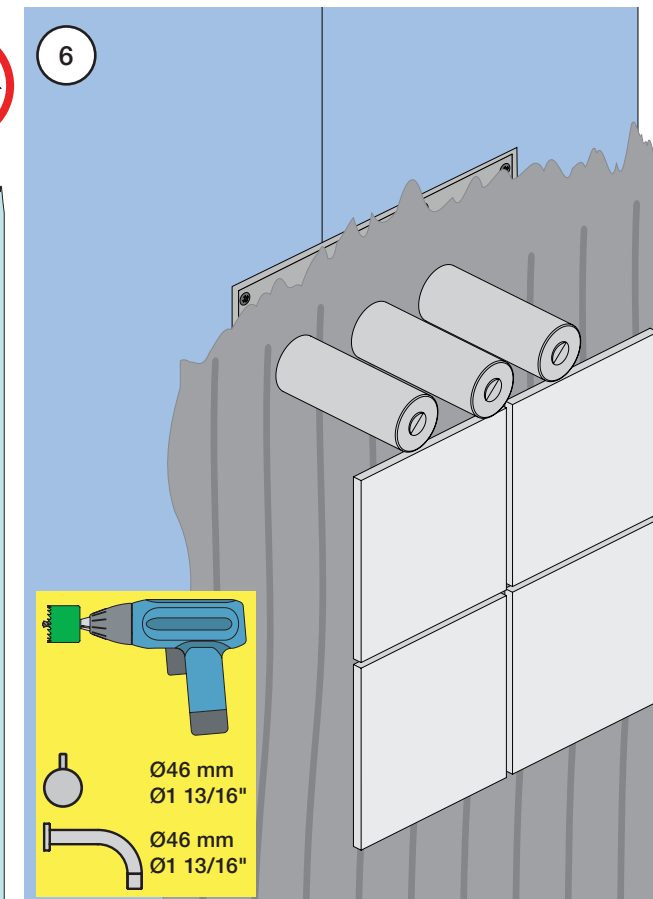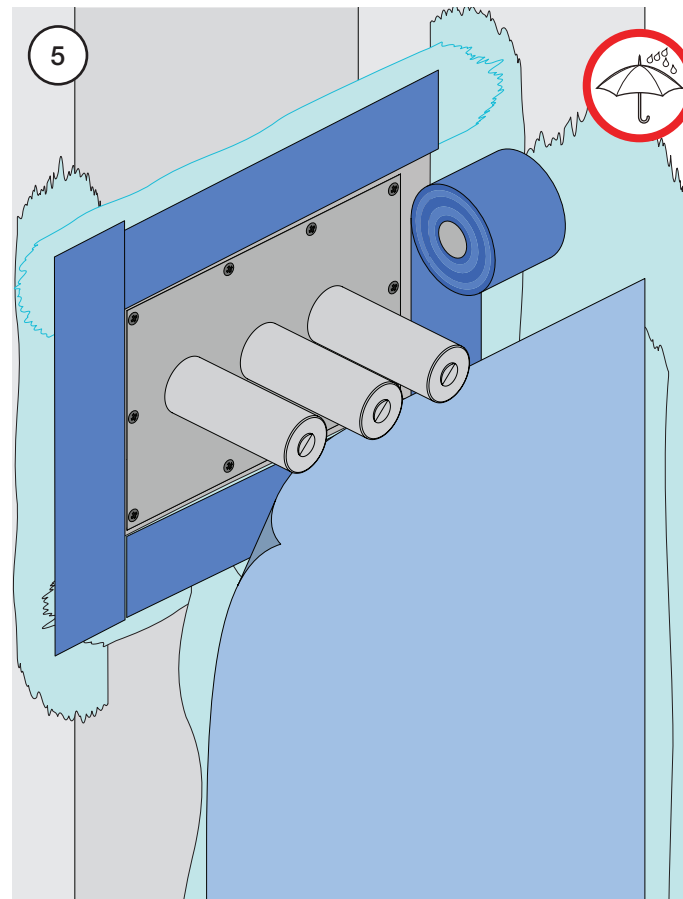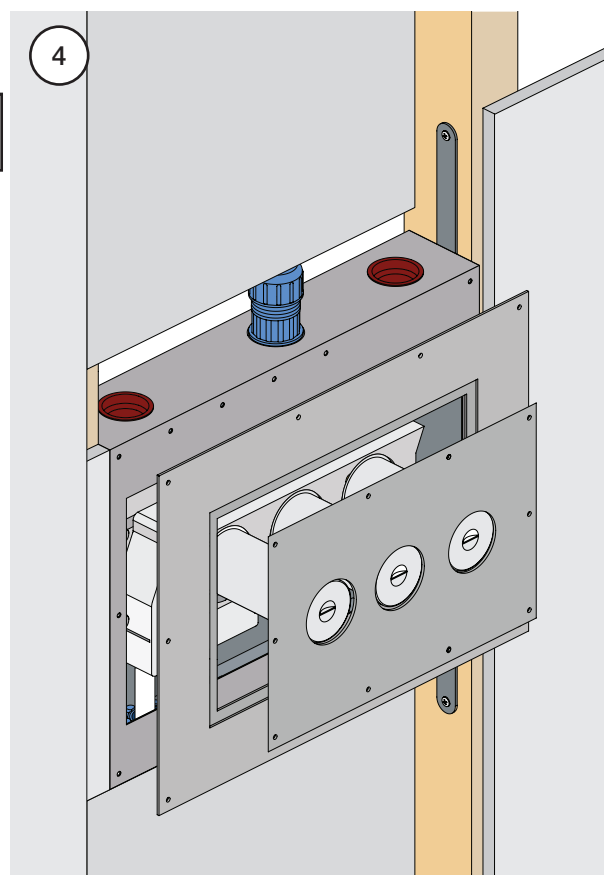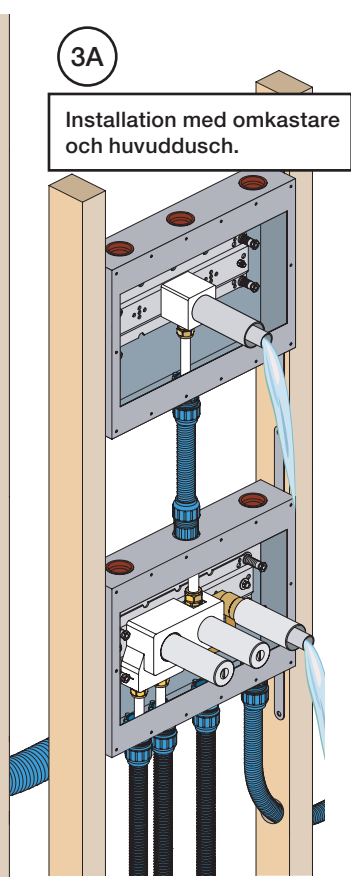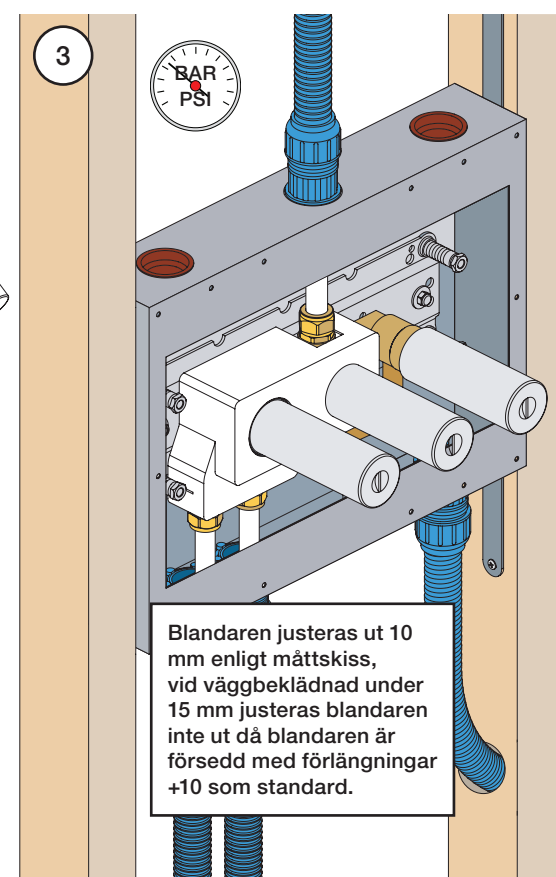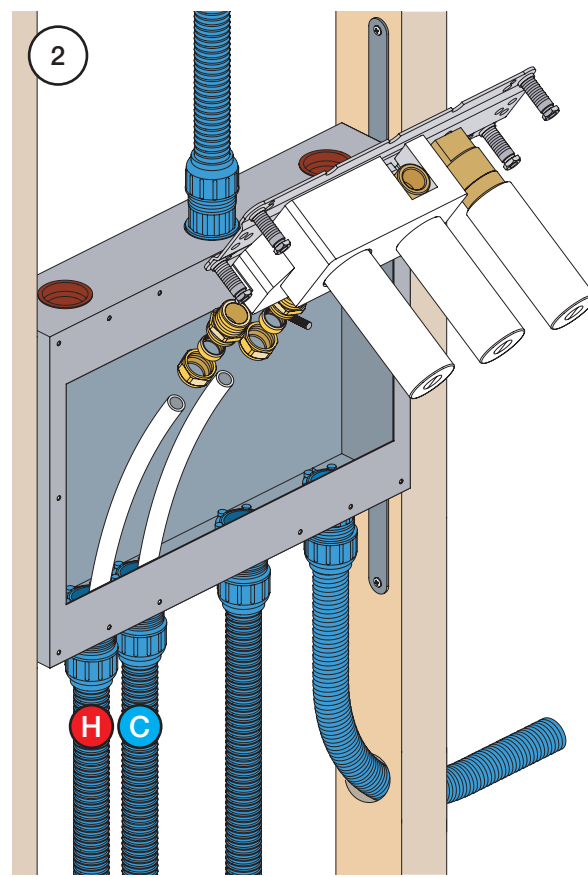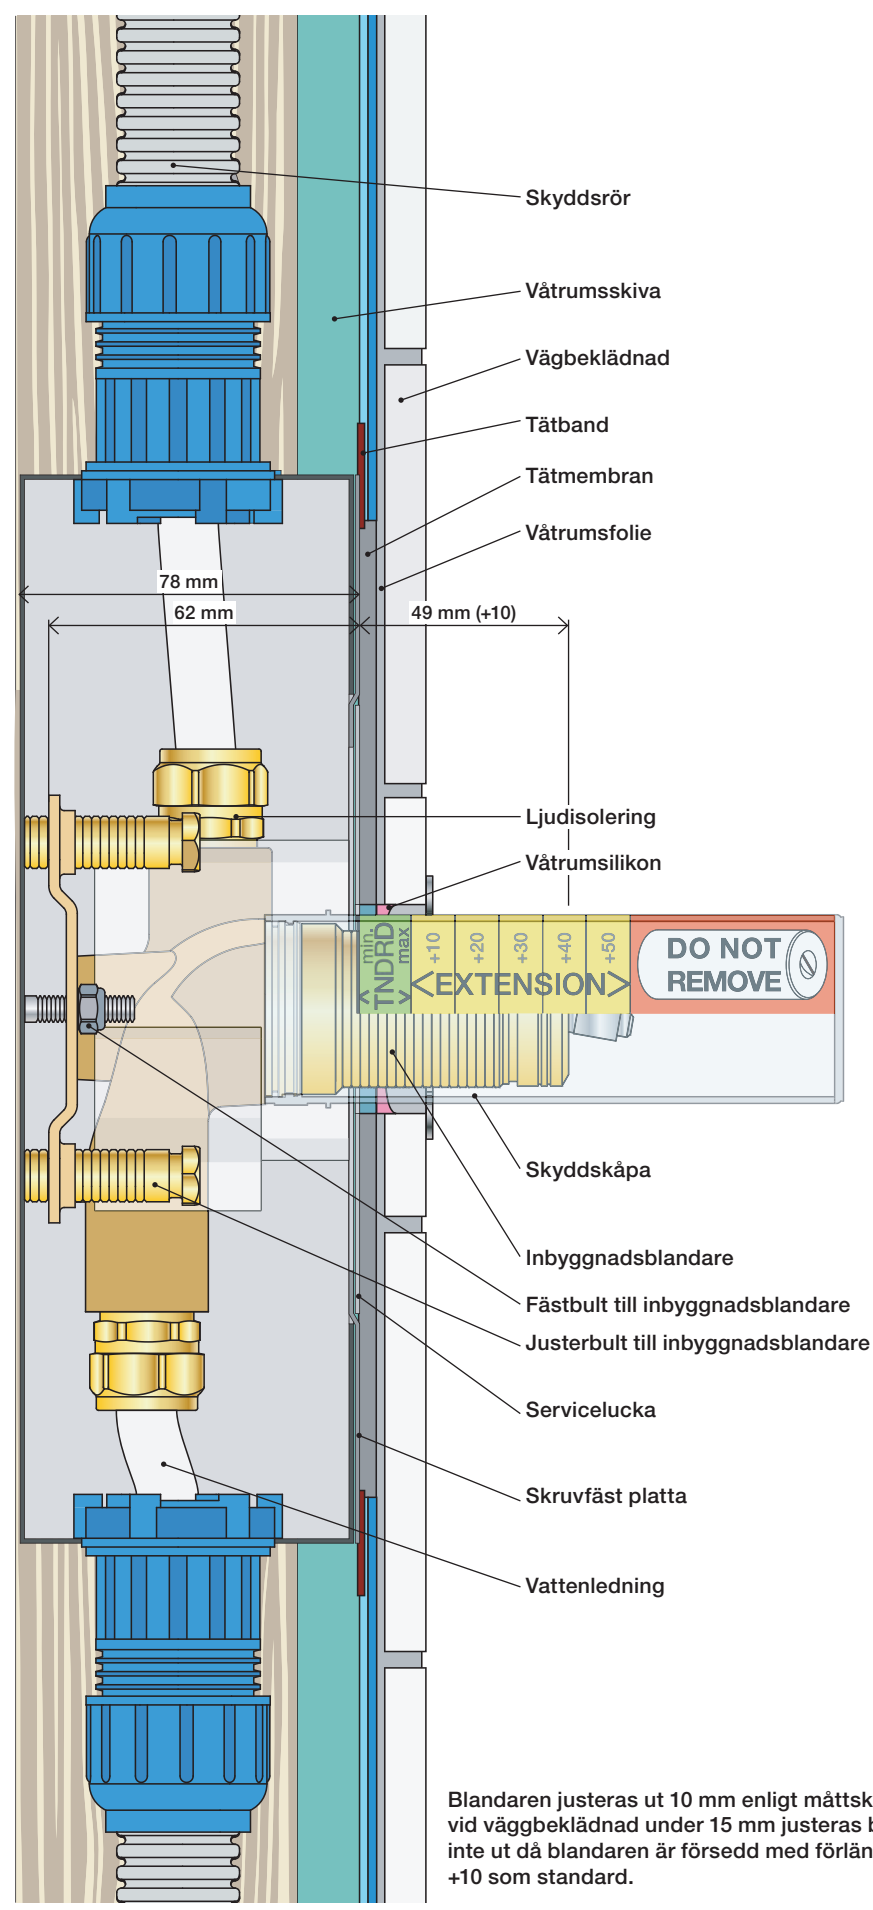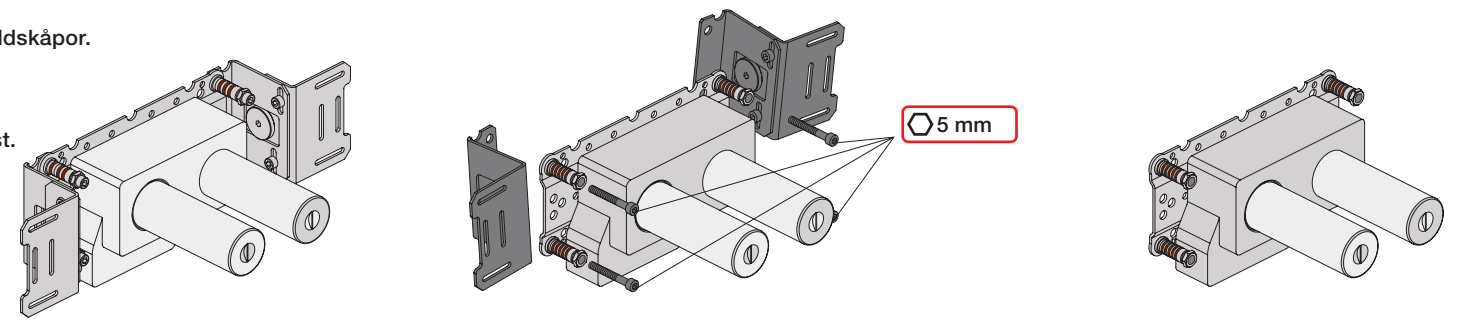

Blandaren justeras ut 10 mm enligt måttskiss, vid vägbeklädnad under 15 mm justeras blandaren inte ut då blandaren är försedd med förlängningar +10 som standard.

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

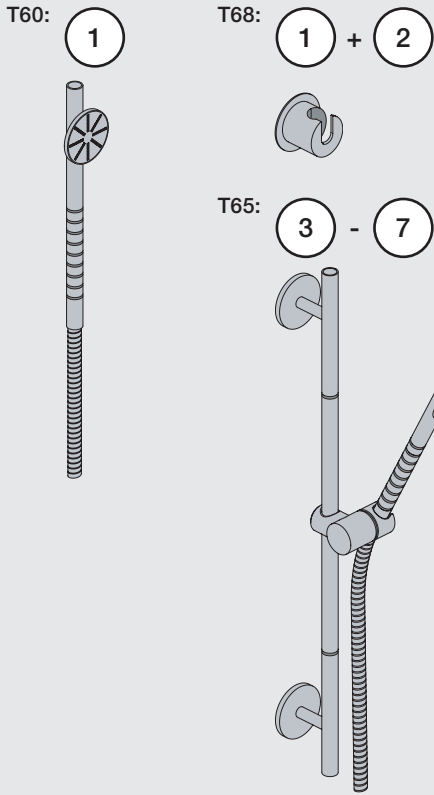

1 T60

28 mm 1 1/8"

55 mm 2 1/8"

Ø17 mm Ø11/16"

290 mm 11 3/8"

1500 mm 5'

G1/2"

Ø60 mm Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min)	6.9	9.8	12	14	15
	(Gal/min)	1.8	2.6	3.2	3.7	4.1

USA: Max. flow rate: 1.6 Gal/min 6.0 l/min.

Max. 65°C. 150°F

Service - VR556

2 T68

Ø43 mm Ø1 3/4"

40 mm 1 5/8"

Ø6 mm 1/4"

25 mm 1"

001G

SILICONE

Bathtub Badewanne

Badekar Badkar

Badkuip Baignoire

3 T65

50 mm 2"

55 mm 2 1/8"

Ø60 mm Ø2 3/8"

490 mm 19 1/4"

590 mm 23 1/4"

690 mm 27 1/8"

790 mm 31"

900 mm 35 3/8"

600 mm 23 5/8"

700 mm 27 1/2"

800 mm 31 1/2"

900 mm 35 3/8"

Min. 200 mm Min. 8"

Min. 350 mm Min. 14"

40 mm 1 5/8"

Ø70

T8 → T68

25 mm 1"

3 T65

50 mm 2"

55 mm 2 1/8"

Ø60 mm Ø2 3/8"

490 mm 19 1/4"

590 mm 23 1/4"

690 mm 27 1/8"

790 mm 31"

900 mm 35 3/8"

600 mm 23 5/8"

700 mm 27 1/2"

800 mm 31 1/2"

900 mm 35 3/8"



Min. 200 mm Min. 8"

Min. 350 mm Min. 14"




40 mm 1 5/8"

Ø70




4

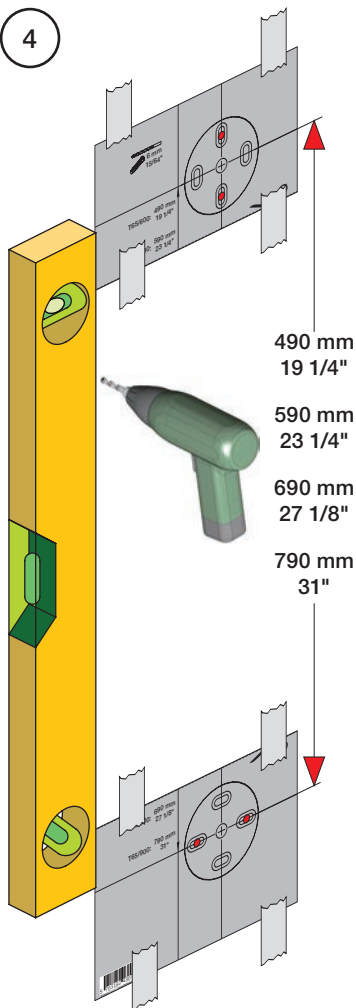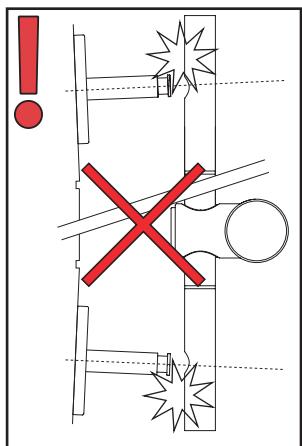490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

5

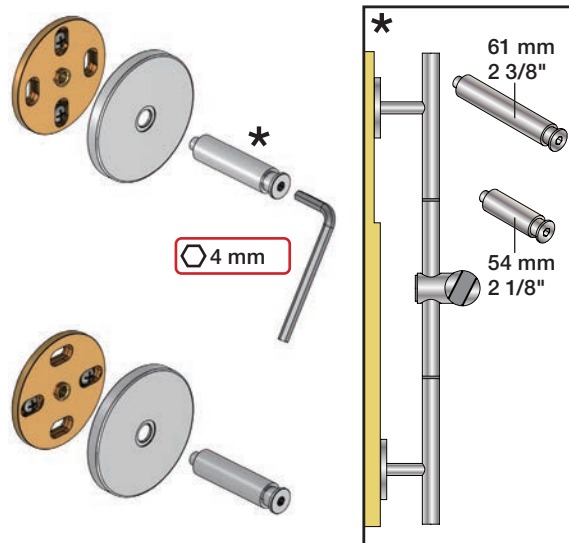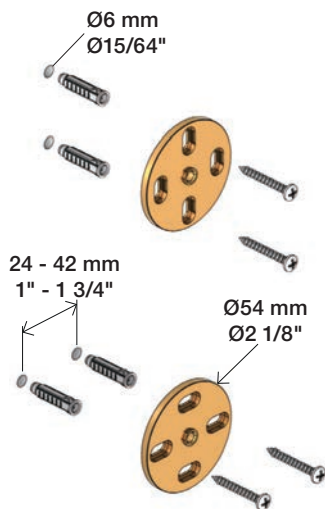

6

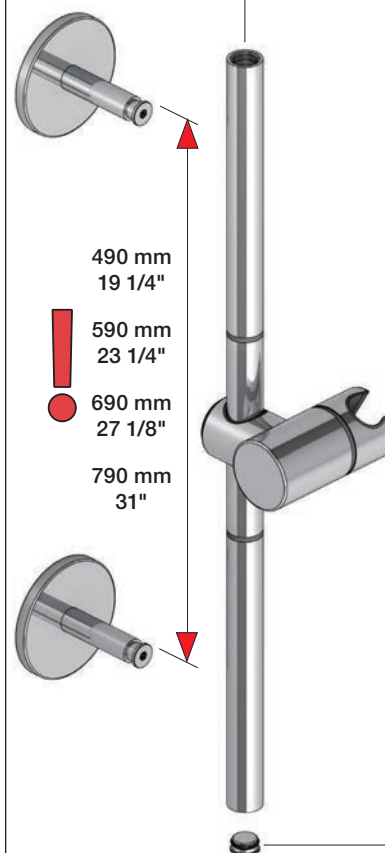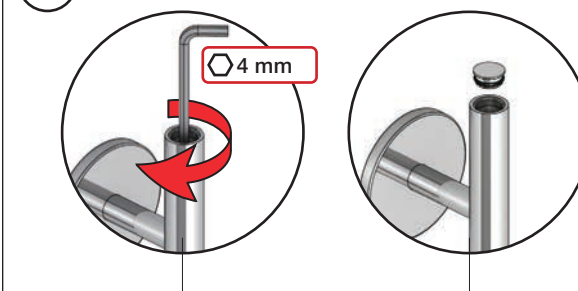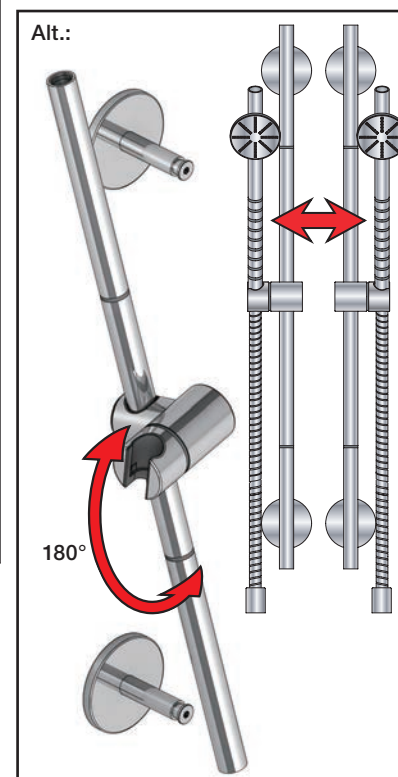490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"


7



8



Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
* Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana



*Membran används inte i SVERIGE,
ihop med inbyggnadsboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning
Verlängerung
Forlængelse
Modification



VR2260/VR1400/VR2019


Tiles:	3 - 15 mm	Std.
Fliesen:	15 - 25 mm	+10
Fliser:	25 - 35 mm	+20
Tegels:	35 - 45 mm	+30
Carreaux:	45 - 55 mm	+40
	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	Tegels: 3 - 15 mm	Std.
	Carreaux: 15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
	45 - 55 mm	+40
	55 - 65 mm	+50




VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"
NR 24:
Ø43 mm
Ø1 3/4"

NR 28




NR 28 - 1

VR3279

VR3279B

NR 28 - 2

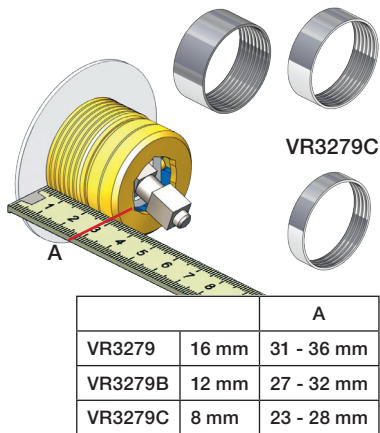


	A	
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 19 - 1 NR 24 - 1

VR2204


VR2204B

VR2204C

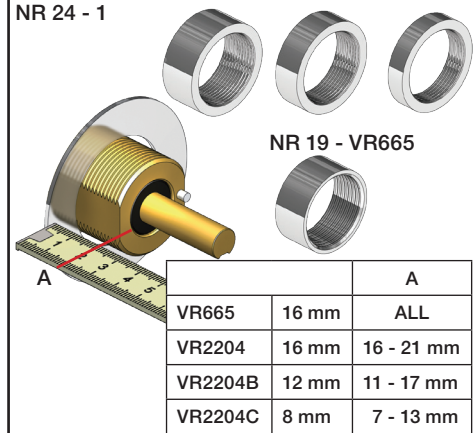


	A	
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm


NR 28 - 3

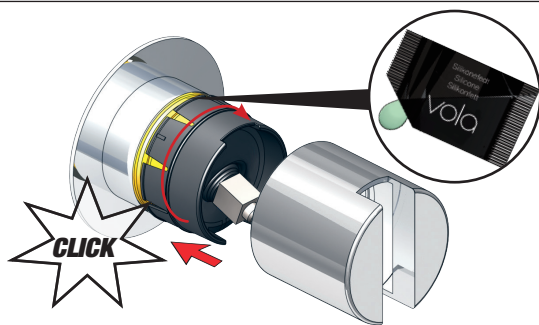


NR 28 - 4



NR 19 - 2 NR 24 - 2

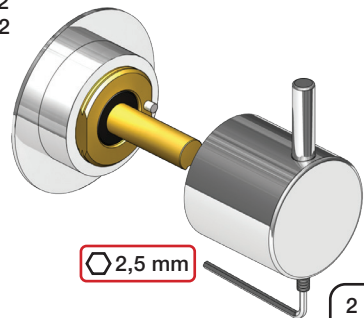


2100

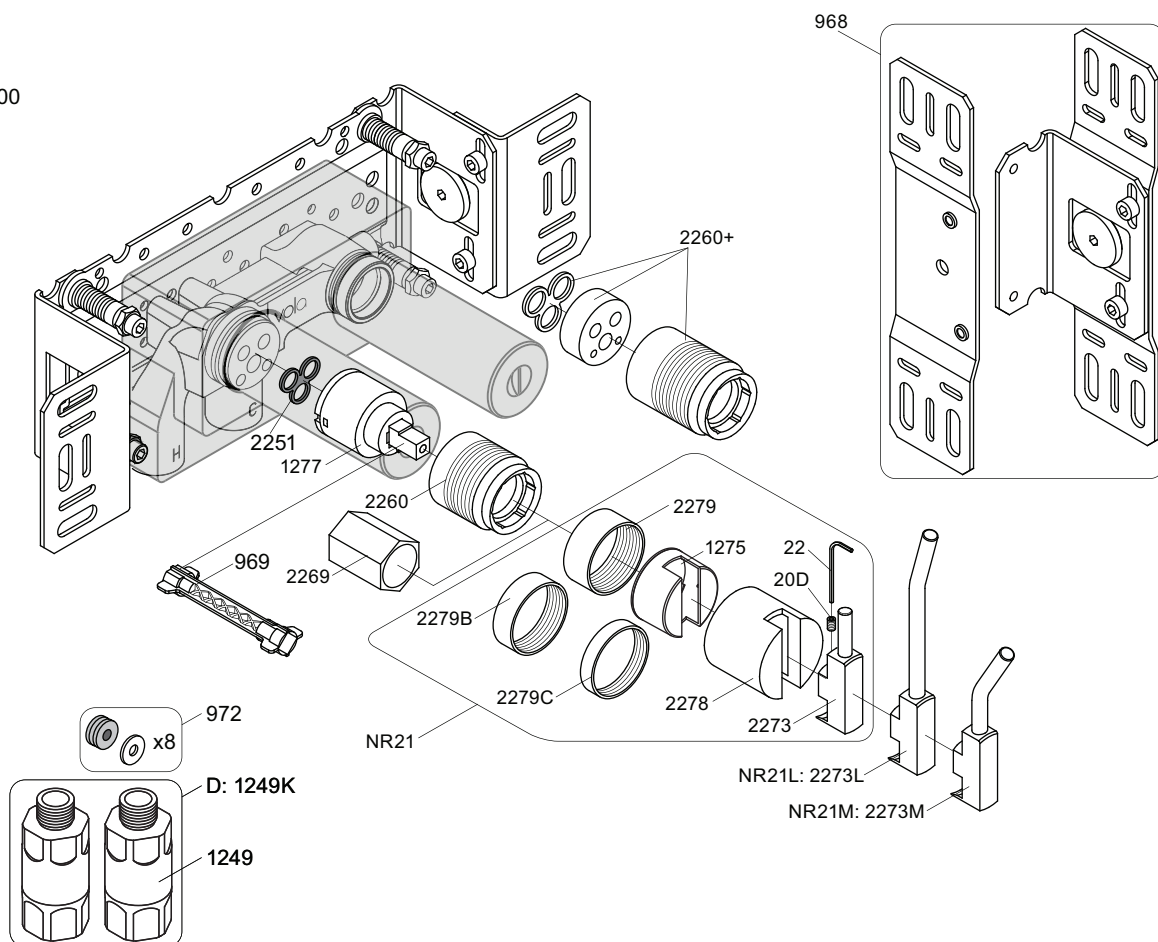


NR21: VR20D, VR22, VR1275, VR2269, VR2273, VR2278, VR2279, VR2279B, VR2279C
 VR1277K: VR22, VR1277, VR2269


2100





2100X




2200V




2300



2002




2003KB



2003B

-



2002



2001, 001




2001, 001



2001



2001, 001



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 2100
 2100X, 2200V, 2300

Date
 May. 22

Rev.
 4

Sheet
 SB 10.7

