

VOLA 100, 100X, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Monteringsvägledning

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÄF eller Grossist.



www.vola.com

SE_100-2100_V2 40998364
12-01-2022



Data, 3 Bar/43.5 Psi:

	l/min.	Gal/min.
100:	18,3	4.8
400V:	15,6	4.1
2100:	25,2	6.7
2400V:	22,2	5.9




Max. 65°C, 150°F

Max.: 10 Bar/145 psi

Installasjonsexempel: 2400NV




Förlängning

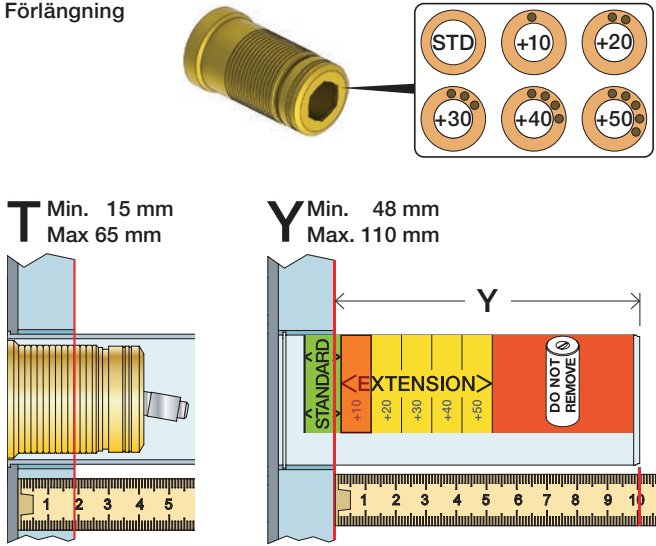

T	Y	VR1260/2260/1400/2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

Förlängning, eftermontering

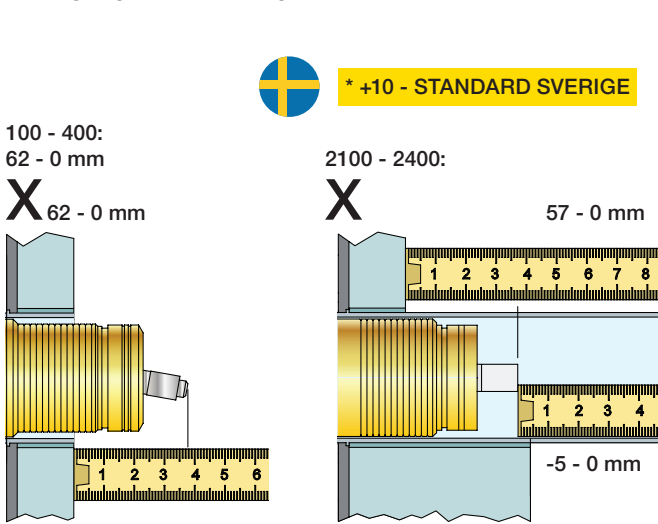


X	VR1260 + VR1400 + VR2019
50 - 52 mm	Std.
40 - 50 mm	+10
30 - 40 mm	+20
20 - 30 mm	+30
10 - 20 mm	+40
0 - 10 mm	+50


X	VR2260 + VR1400 + VR2019
45 - 57 mm	Std.
35 - 45 mm	+10
25 - 35 mm	+20
15 - 25 mm	+30
5 - 15 mm	+40
-5 - 5 mm	+50

	L	L1	L2	H
A	220 mm 8 1/2"		-	
B	318 mm 12 1/2"	78 mm 3 1/16"	-	95 mm 3 3/4"
C			-	
D	396 mm 15 1/2"		156 mm 6 1/8"	
E				


A 100, 2100, 200V, 2200V, 400V, 2400V




C 300, 2300

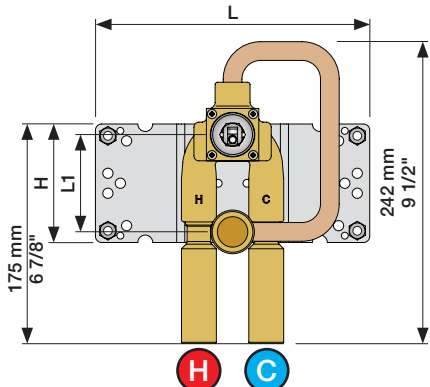


D 400NV, 2400NV, 400TV, 2400TV

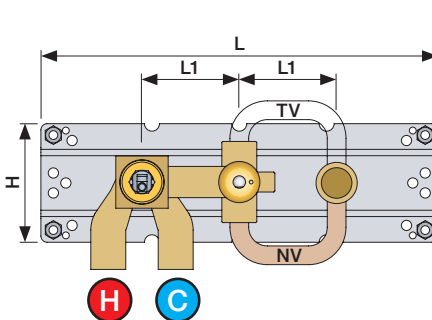

E 400FV, 2400FV, 400RV, 2400RV

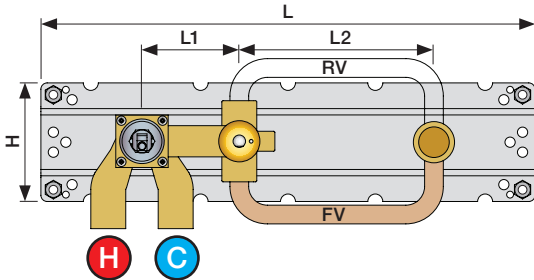


B 100X, 2100X




Montering av förlängning


VR1260+

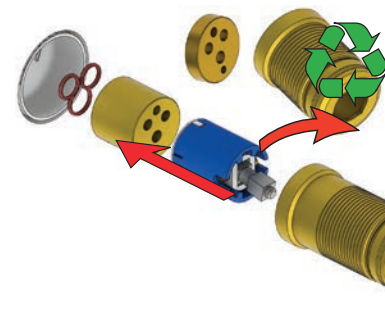


VR2260+

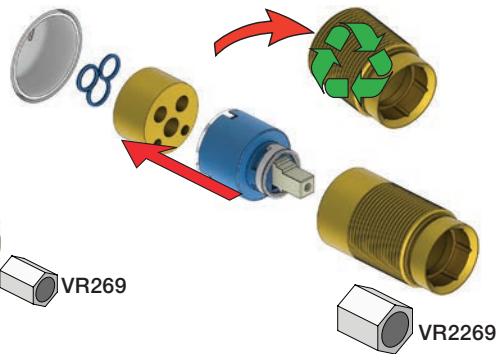


VR2019+, VR2119+

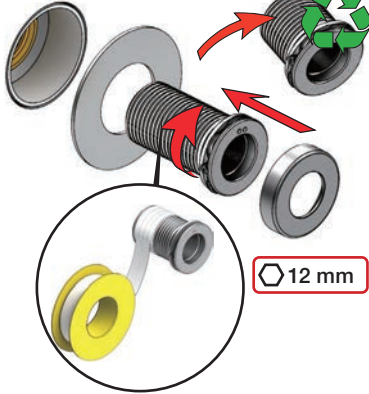

VR1400+

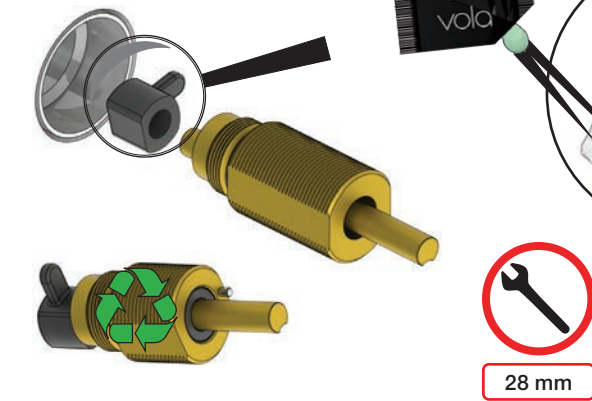


400-2400

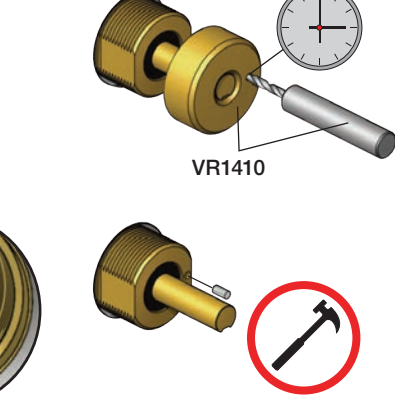

1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÅF eller Grossist.

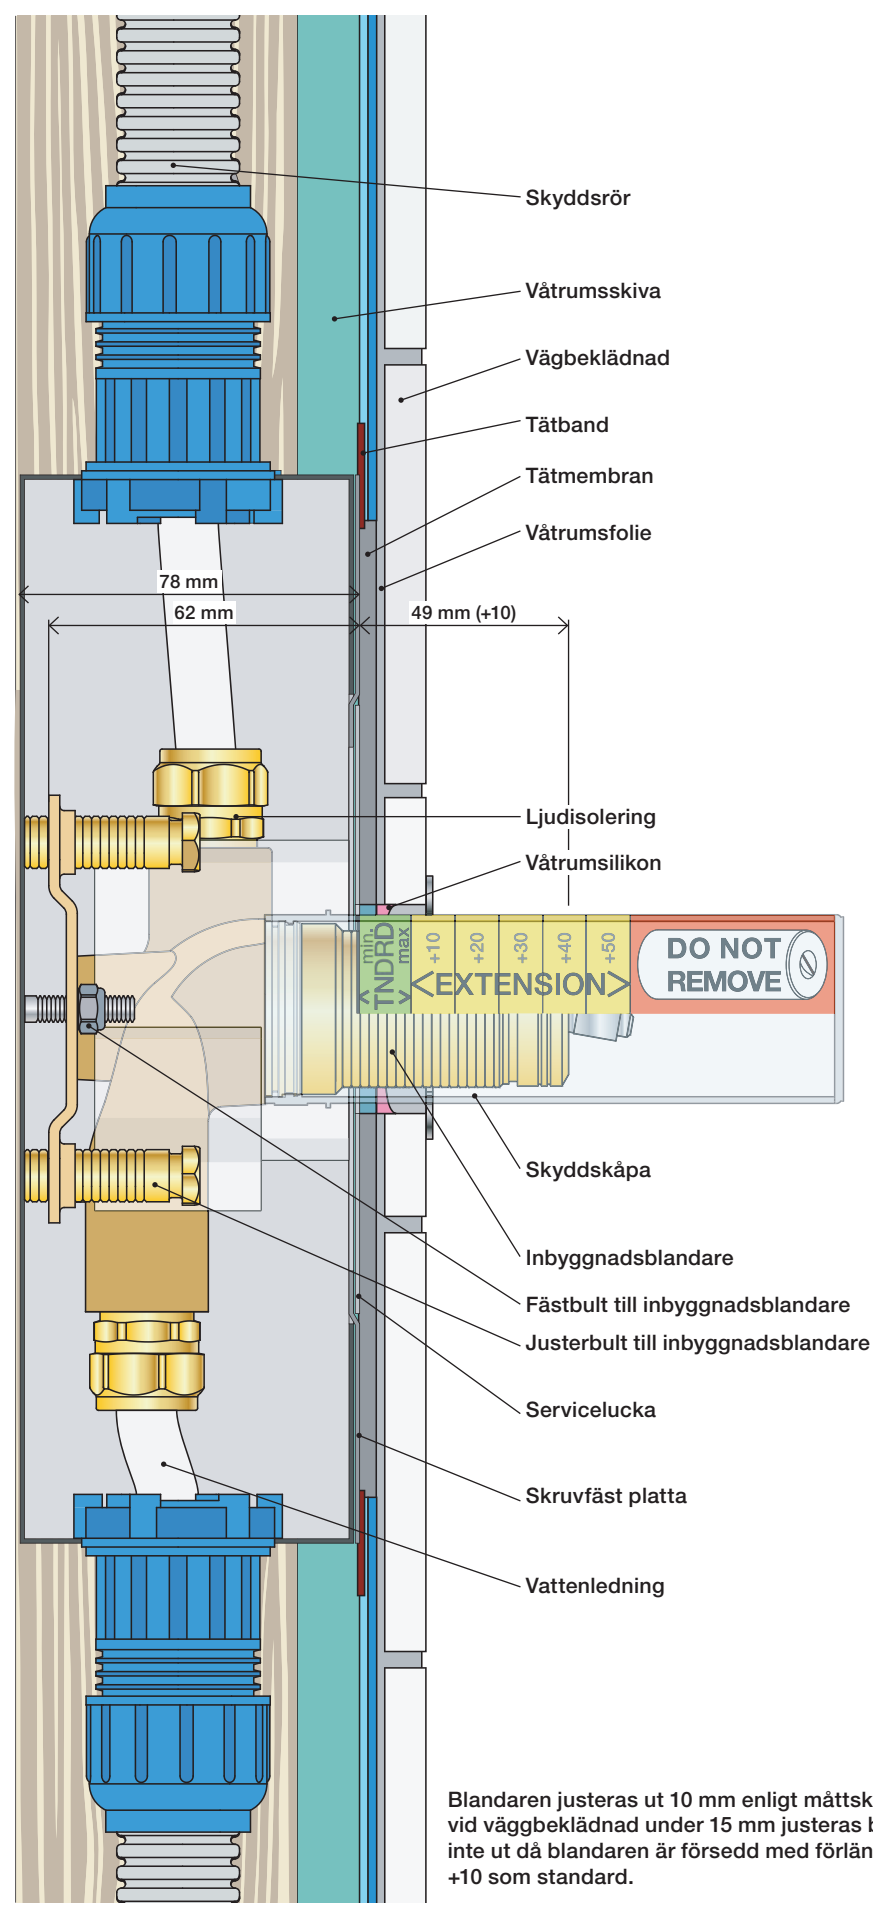

VOLA 010, 020, 030, 040
VOLA 010C, 020C, 040D

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage



04/00026
 04/00101
 04/00175
 04/00298

010, 020

010C, 020C

030

040

040D

www.vola.com

mnt_010_V1_40998360
 02-10-2023



5 705230 341750

Standard Flow data:		Max.
010/020	(l/min)	5.0
	(Gal/min)	1.3
010C/020C	(l/min)	30
	(Gal/min)	7.9
030	(l/min)	9.0
	(Gal/min)	2.0
040	(l/min)	25
	(Gal/min)	6.6
040D	(l/min)	30
	(Gal/min)	7.9
		Max. 65°C. Max. 150°F



VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min




For more water saving possibilities please see:
 Weitere Wassersparmöglichkeiten finden Sie auf:
 For flere vandbesparende muligheder se venligst:
 För mer vattenbesparande möjligheter hänvisas till:
 Voor meer waterbesparende mogelijkheden zie:
 Pour plus d'informations sur les options : économie d'eau, voir le site:


www.vola.com






010, 020

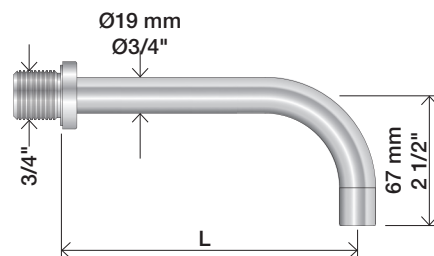


010C, 020C

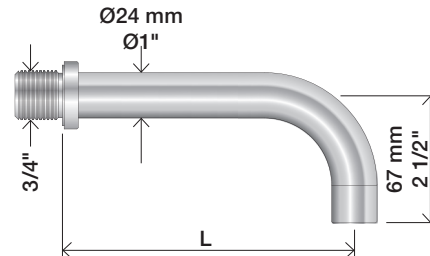



030

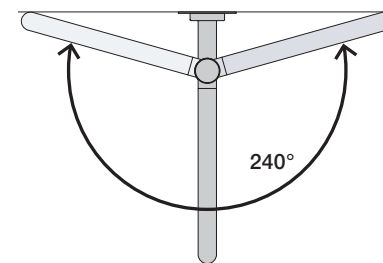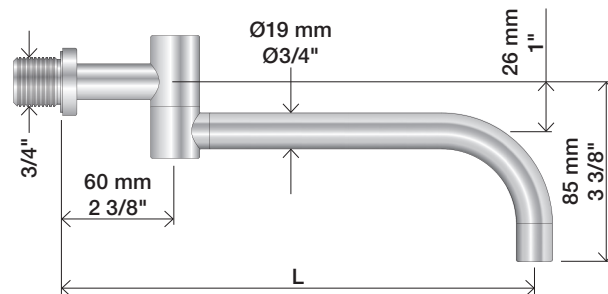

040

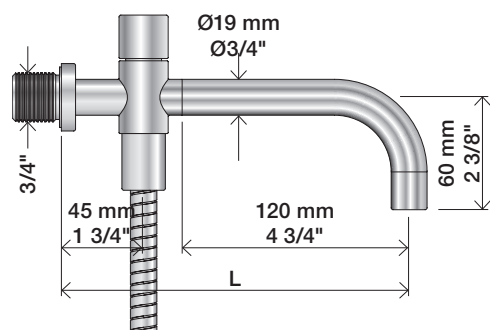

040D

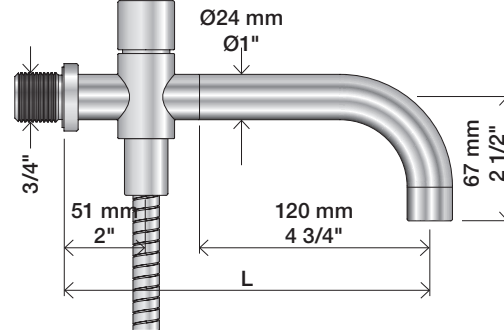

	L (mm)	L (Inch)
010(C)/100	100	4"
010(C)/130	130	5"
010(C)/160	160	6"
020(C)/200	200	7 3/4"
020(C)/225	225	8 3/4"
020(C)/260	260	10 1/4"
020(C)/300	300	11 3/4"

	L (mm)	L (Inch)
030/200	200	7 3/4"
030/250	250	9 3/4"
030/300	300	11 3/4"
030/350	350	13 3/4"

	L (mm)	L (Inch)
040	185	7 3/4"
040D	200	7 3/4"
040D/250	250	9 3/4"
040D/300	300	11 3/4"

1

010, 010C, 020, 020C, 030, 040, 040D



2



3

Ø19: 010, 020, 030, 040




Ø24: 010C, 020C, 040D

Extension
VerlängerungForlængerdele
FörlängningVerlængstukken
ModificationT Min. 3 mm
Max. 65 mmY Min. 48 mm
Max. 110 mm

T	Y	VR2019 (Ø19) VR2119 (Ø24)
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+/VR2219+

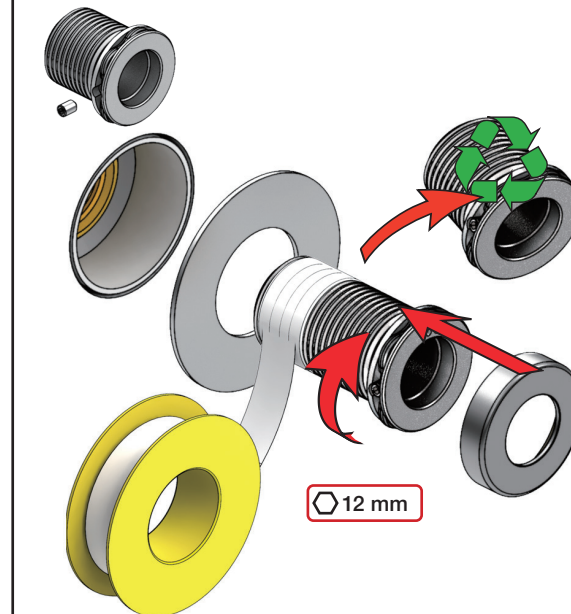




 **GODKENDT
TIL DRIKKEVAND**

vola®



705230 286211

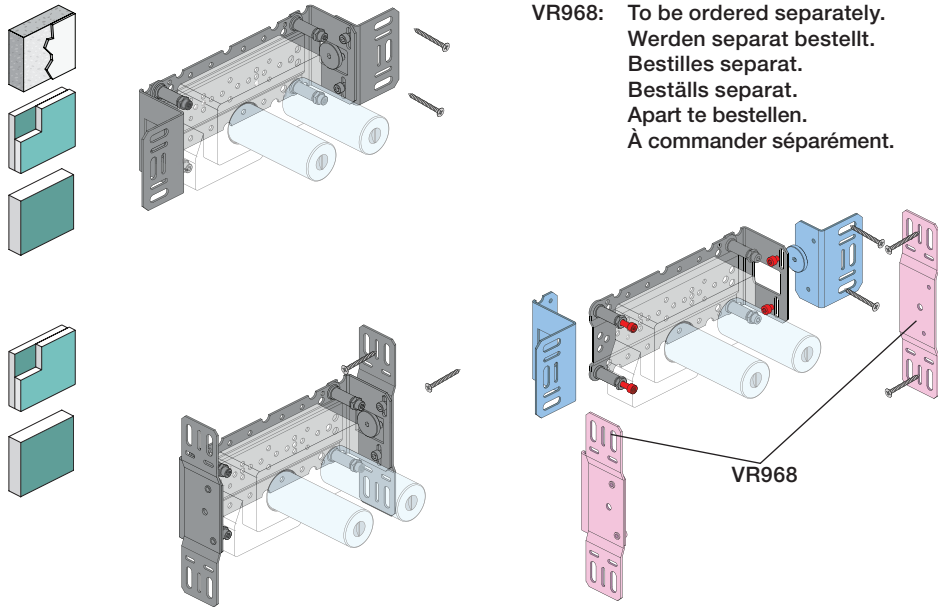


VR968

 Max. 65°C, 150°F

200M

PEX1

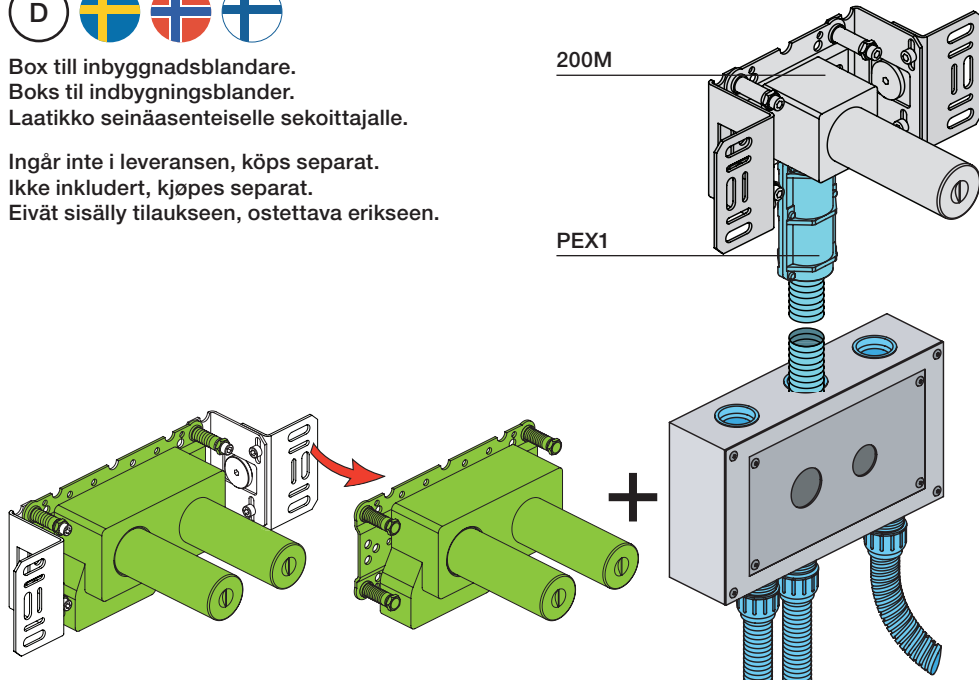

VR1260

VR2260

VR2260


A diagram of a standard extension card. The card is divided into sections: a green section labeled 'STANDARD', a yellow section labeled '<EXTENSION>' with values +10, +20, +30, +40, and +50, and a red section labeled 'DO NOT REMOVE'. A ruler below the card shows a scale from 1 to 10. A dimension line above the card indicates a length 'Y' from the start of the yellow section to the end of the red section.

Fitting of extension
Montage von verlängerung
Montering af forlængerdele

VR1260+


VR2260+

VR2019+, VR2119+

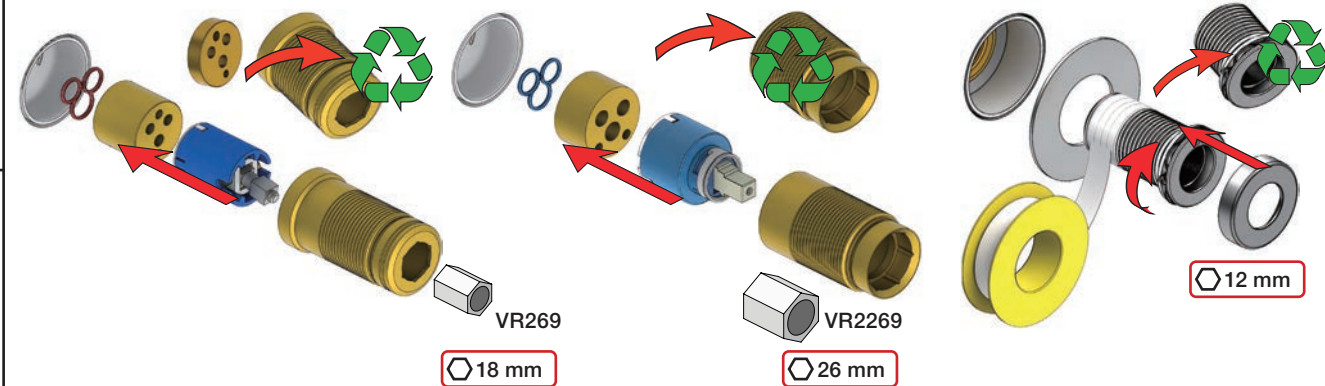

VR1400+

400-2400












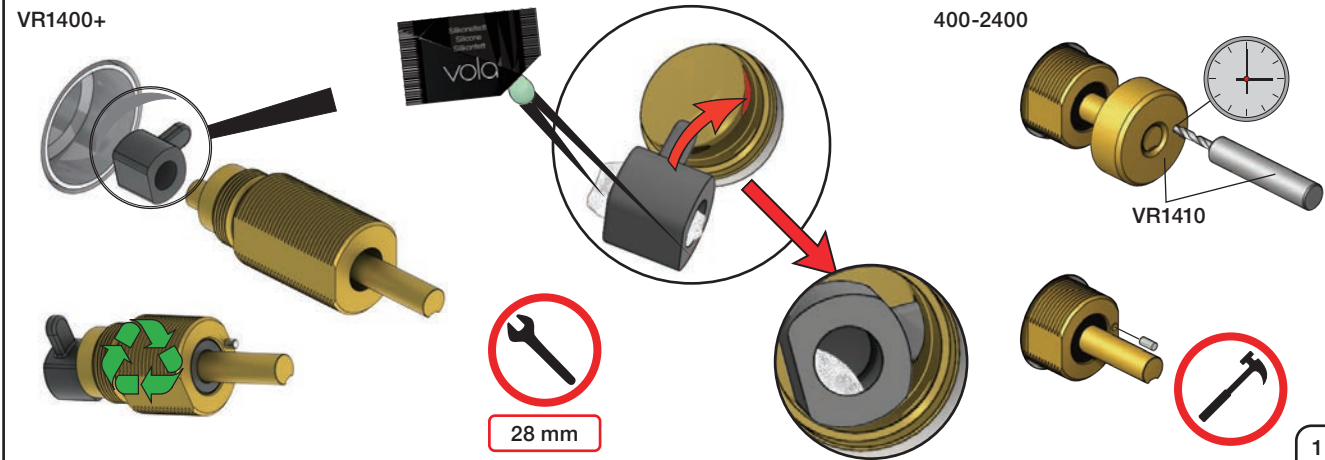


X_{52 - 0 mm}



X_{-15 - 0 mm}

	X	VR1260 + VR1400 + VR2019
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

	X	VR2260 + VR1400 + VR2019
	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

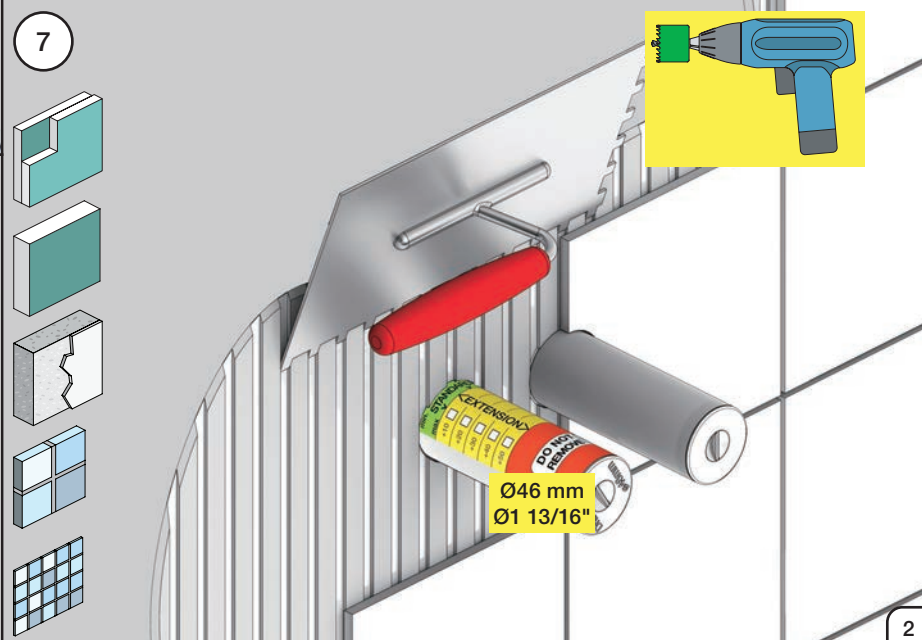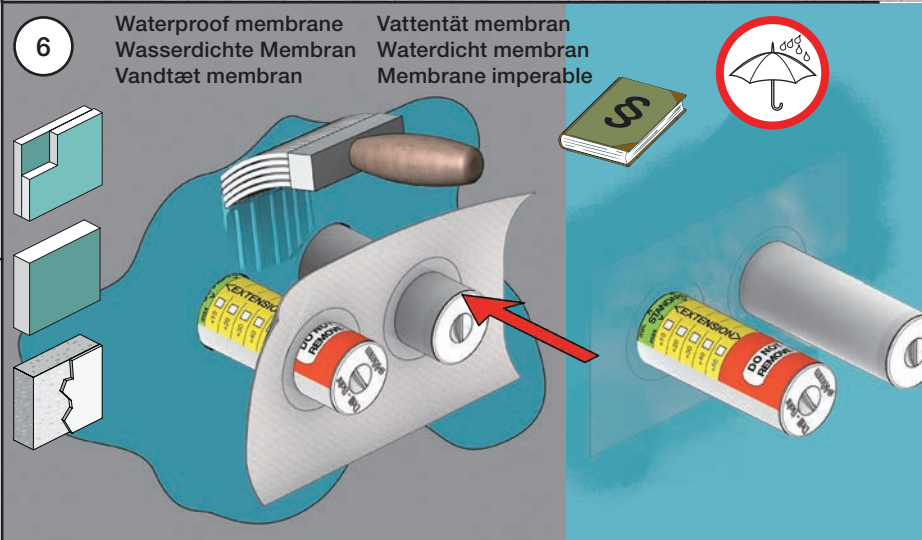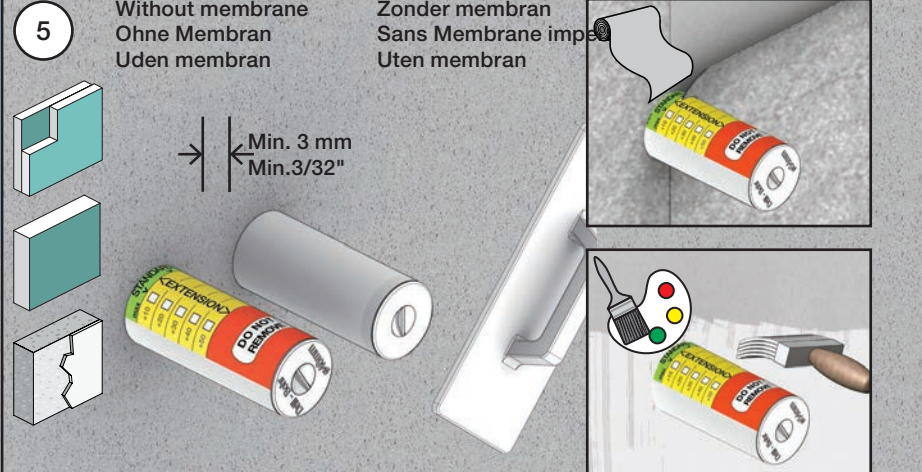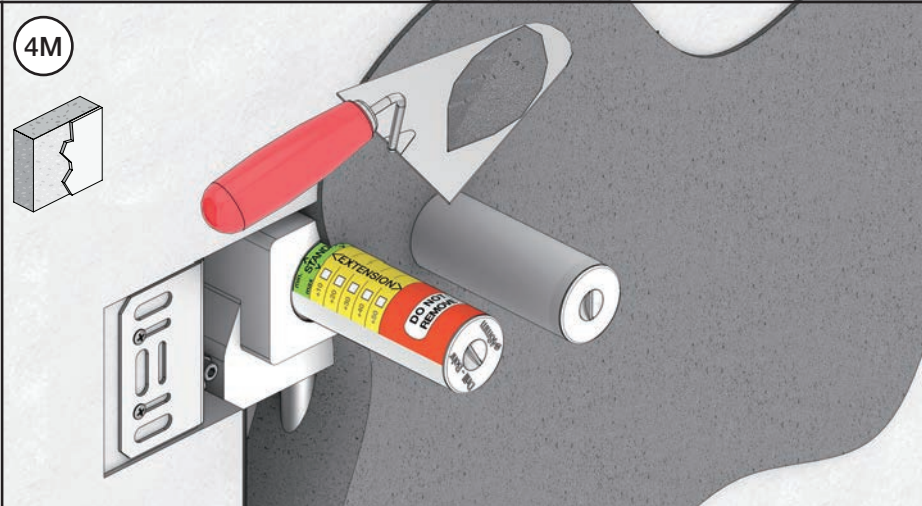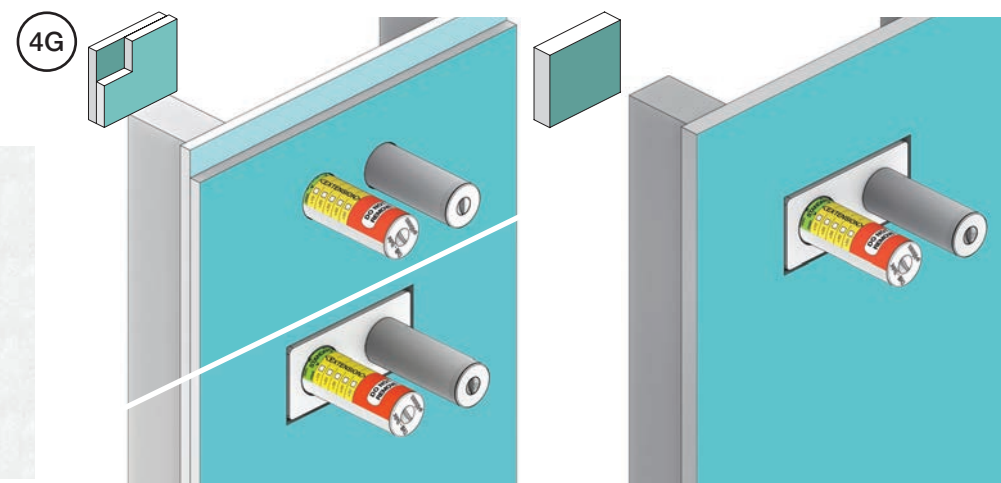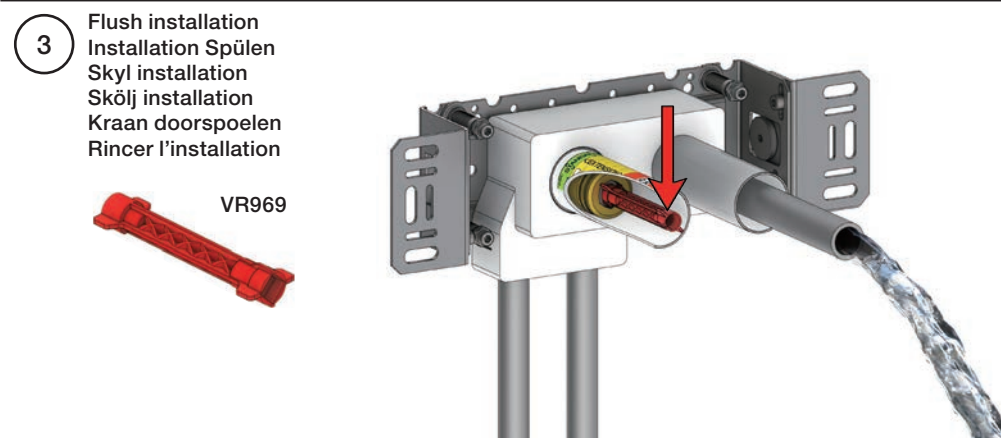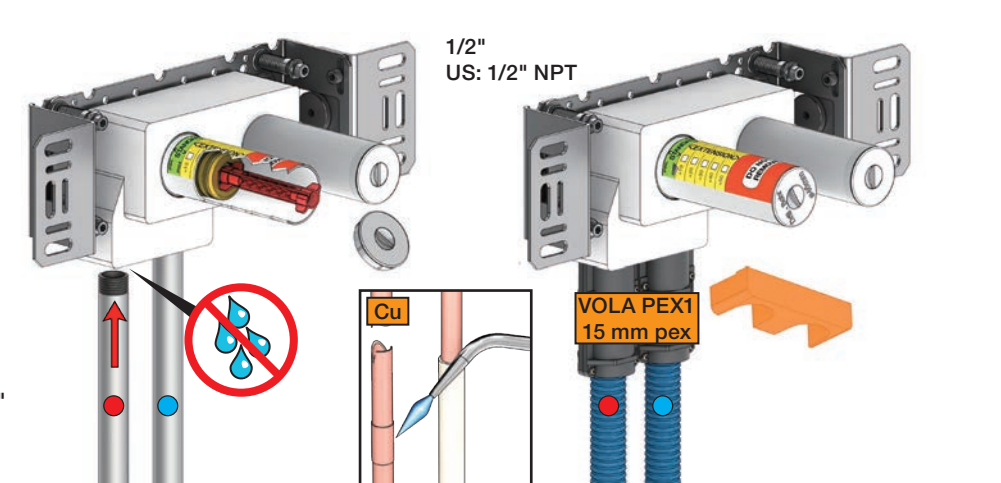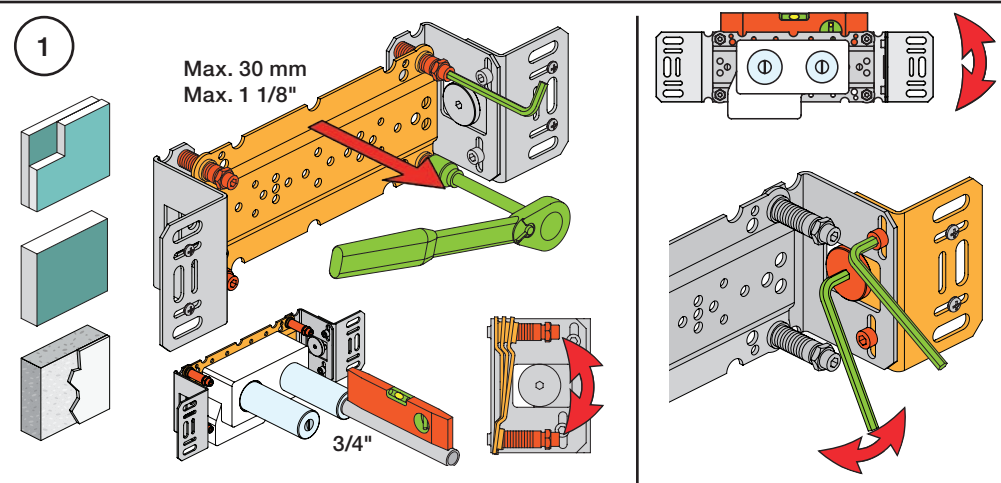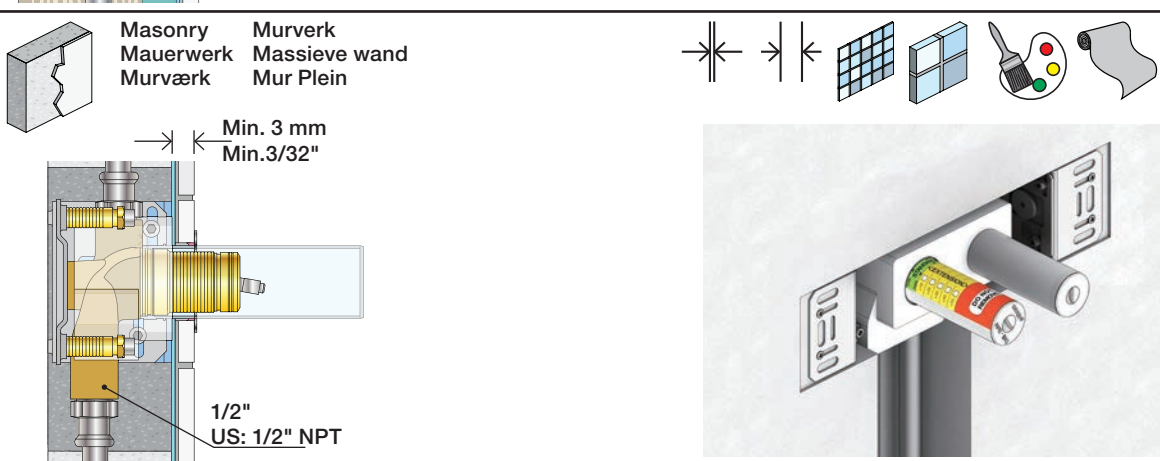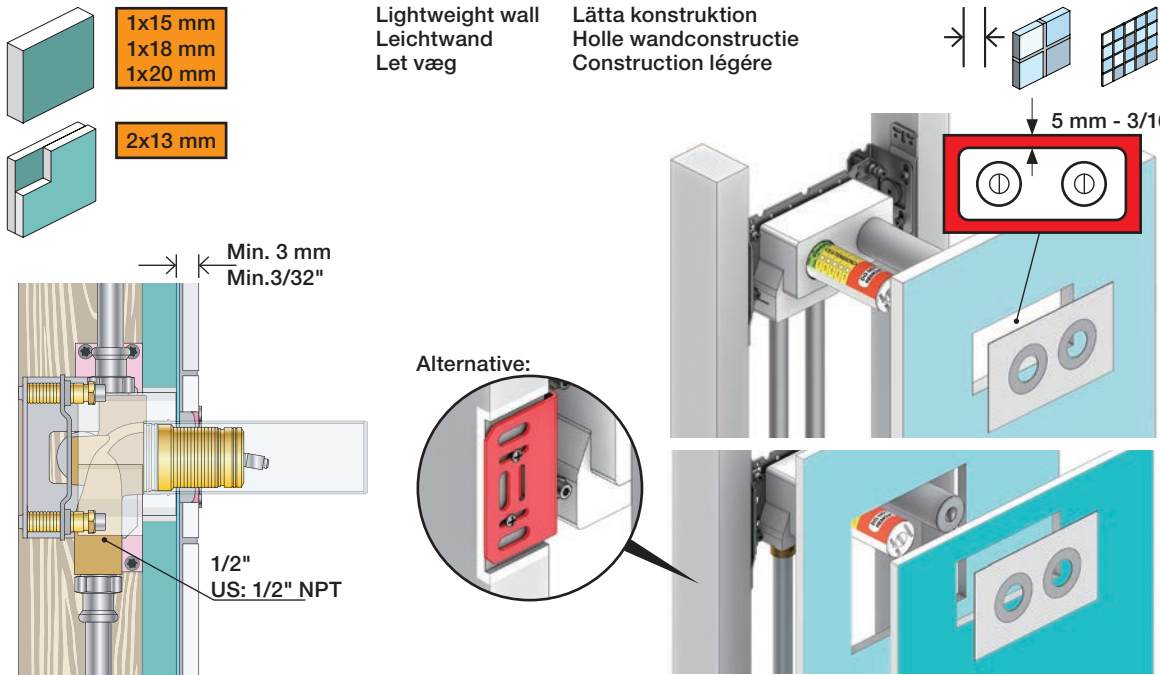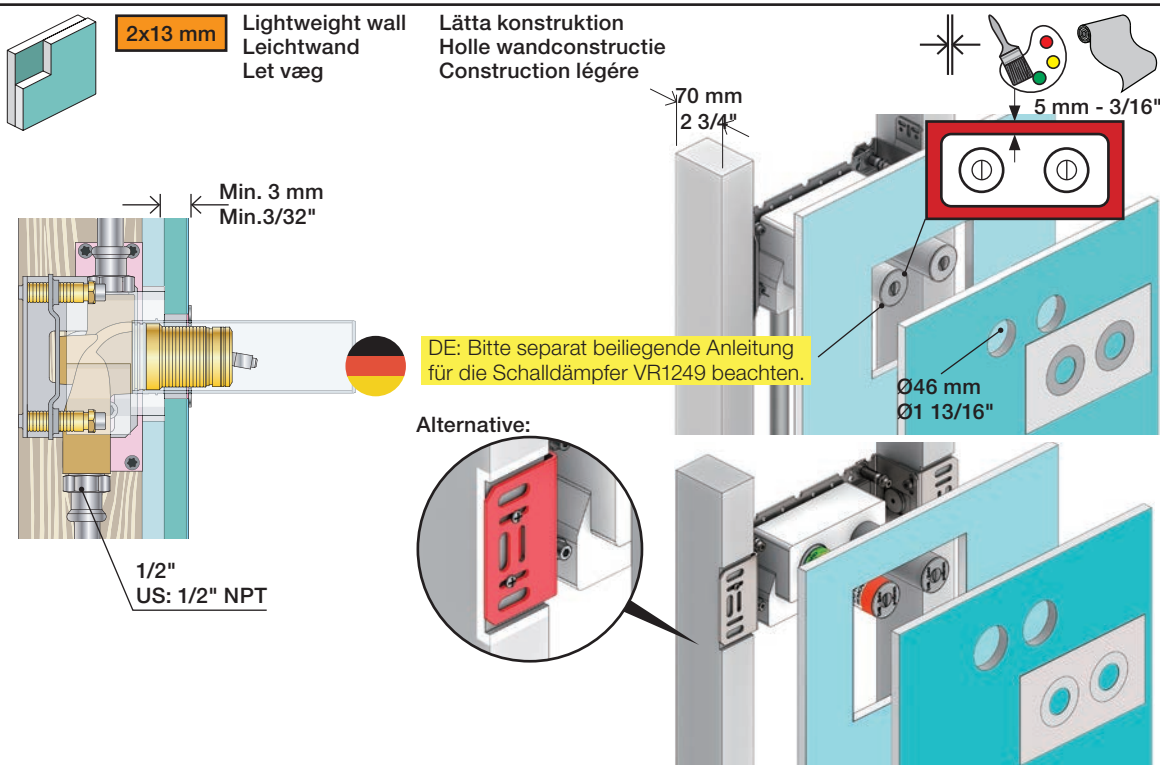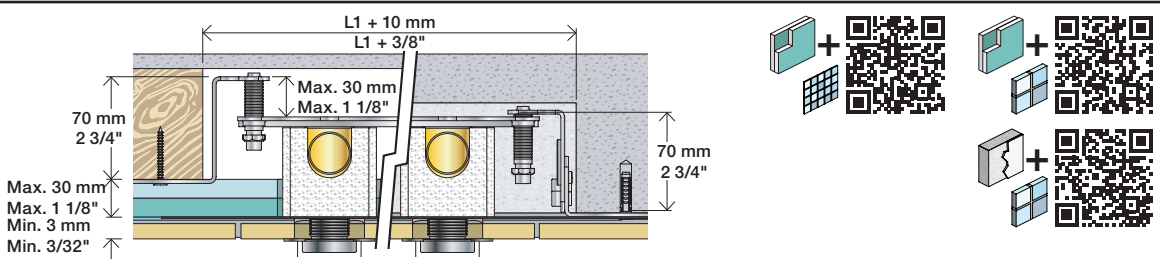

Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
* Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

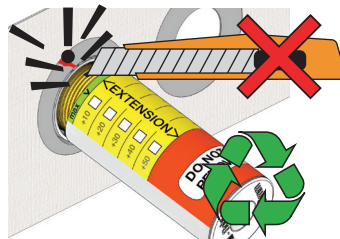

*Membran används inte i SVERIGE,
ihop med inbygggnadsboxen.


NR.21:

1

NR.28+19+24:

2

Förlängning
Verlängerung
Forlængelse
Modification



VR2260/VR1400/VR2019


Tiles:	3 - 15 mm	Std.
Fliesen:	15 - 25 mm	+10
Fliser:	25 - 35 mm	+20
Tegels:	35 - 45 mm	+30
Carreaux:	45 - 55 mm	+40
	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	Tegels: 3 - 15 mm	Std.
	Carreaux: 15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
	45 - 55 mm	+40
	55 - 65 mm	+50




VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"
NR 24:
Ø43 mm
Ø1 3/4"

NR 28




NR 28 - 1

VR3279

VR3279B

NR 28 - 2

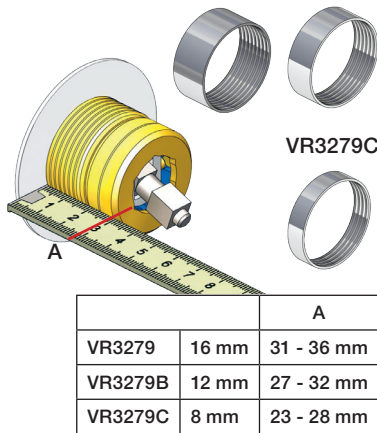


	A	
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 19 - 1 NR 24 - 1

VR2204


VR2204B

VR2204C

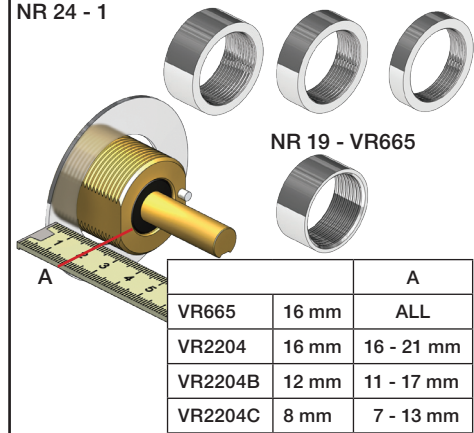


	A	
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm


NR 28 - 3

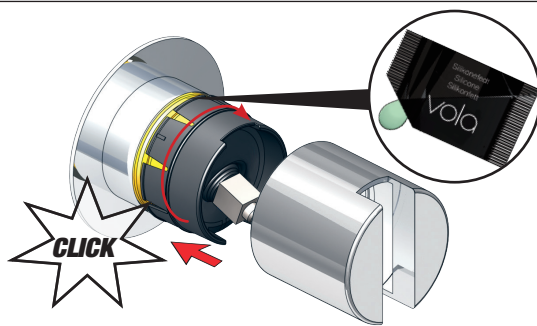


NR 28 - 4



NR 19 - 2 NR 24 - 2

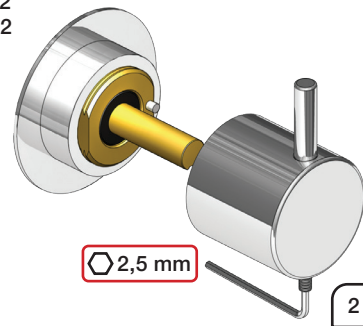


100

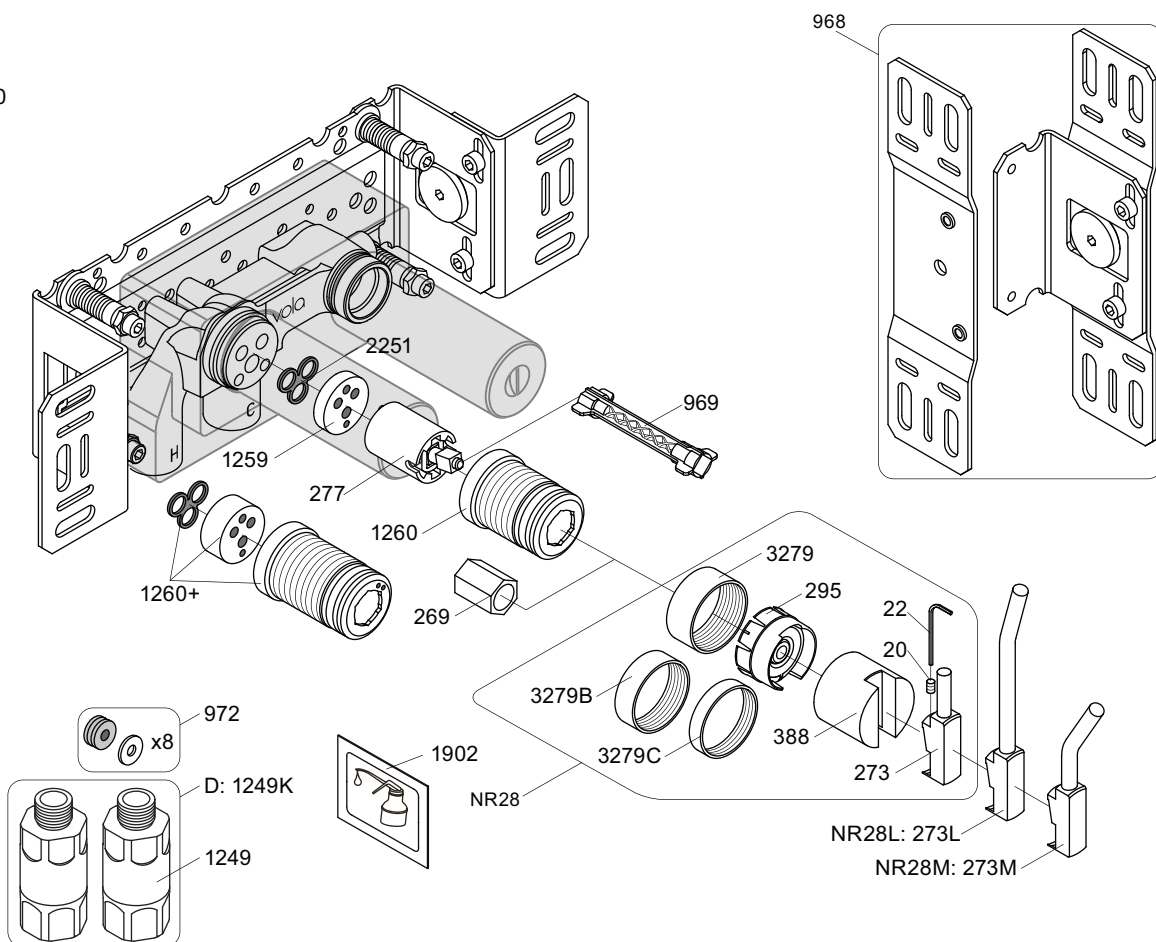


NR28: VR20, VR22, VR269, VR273, VR295, VR388, VR3279, VR3279B, VR3279C
 VR277K: VR22, VR269, VR277
 VR1260: VR1259, VR1260, VR2251


100





100X




200V




300



3002




3003K



3003


-



3002




3001, 001




3001, 001



3001



3001, 001




vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 100
 100X, 200V, 300

Date
 May. 22

Rev.
 7

Sheet
 SB 1.2

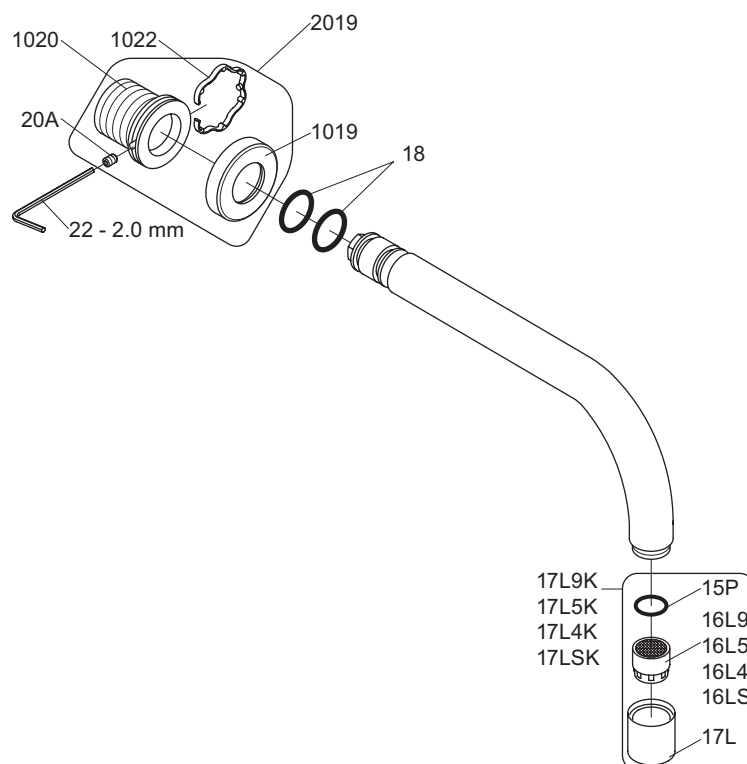

VR17L9K: VR15P, VR16L9, VR17L
 VR17L5K: VR15P, VR16L5, VR17L
 VR17L4K: VR15P, VR16L4, VR17L (US Standard)
 VR17LSK: VR15P, VR16LS, VR17L
 VR1020K: VR20A, VR22, VR1020, VR1022
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



volå

Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@volå.com
 www.volå.com

VOLÅ 010 / 020

Date
 Apr. 21

Rev.
 3

Sheet
 SB11