


VOLA S21V, S42V, 2600, 2700V, 2800V, 2900

Monteringsvägledning

NB.
Boxen leveraras inte av Vola.
utan köps genom ÅF eller Grossist.

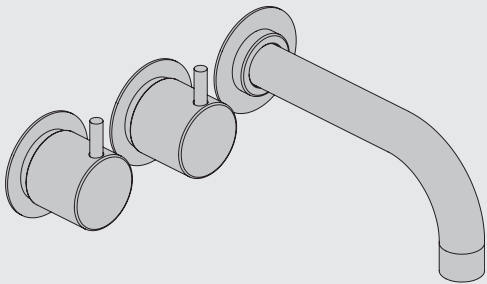

www.vola.com

SE_2600_V2_40998368
20-01-2022



Data, 3 Bar/43.5 Psi:


Max:	l/min.	Gal/min.
S21V:	50	13.2
S42V:	77	20.3
2600:	50	13.2
2700V:	77	20.3
2800V:	50	13.2
2900:	50	13.2




Max. 65°C, 150°F

Max.: 10 Bar/145 psi

Installasjonsexempel: 2800


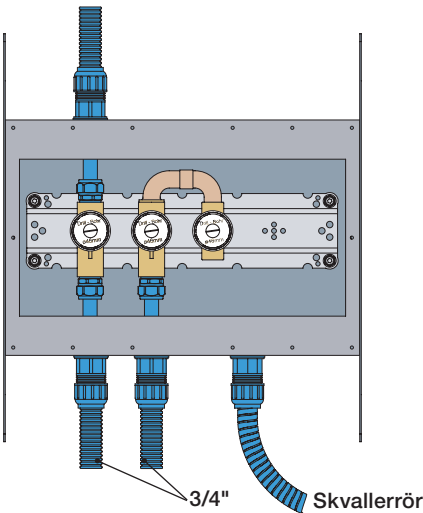


Förlängning

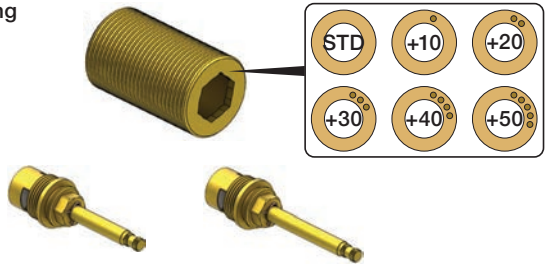

T Min. 15 mm
Max 65 mm


Y Min. 48 mm
Max. 110 mm

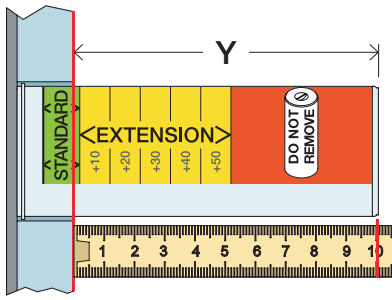

X 62 - 0 mm



* +10 - STANDARD SVERIGE




	T	Y	VR699/VR2019
	5 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50


	X	VR699/VR2019
	50 - 62 mm	Std.
	40 - 50 mm	+10
	30 - 40 mm	+20
	20 - 30 mm	+30
	10 - 20 mm	+40
	0 - 10 mm	+50

Montering av förlängning







VR697+

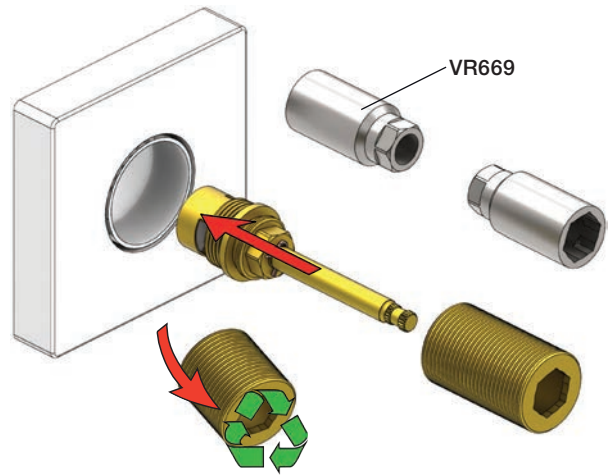

VR2019+, VR2119+






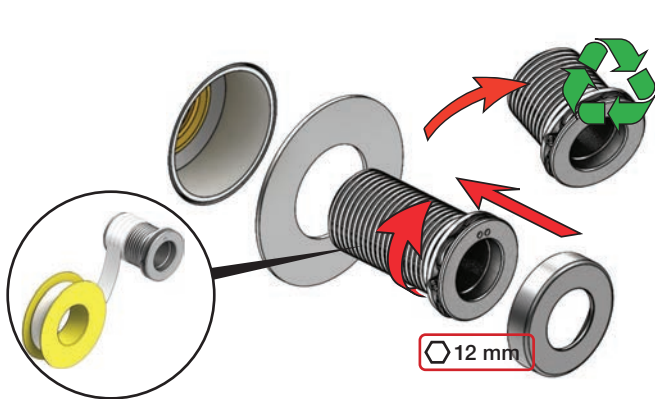


	L	L1	L2	H
A	318 mm 12 1/2"	78 mm 3 1/16"	-	95 mm 3 3/4"
B	220 mm 8 1/2"		340 mm 13 3/8"	
C	396 mm 15 1/2"			
D	220 mm 8 1/2"			
E	120 mm 4 3/4"			

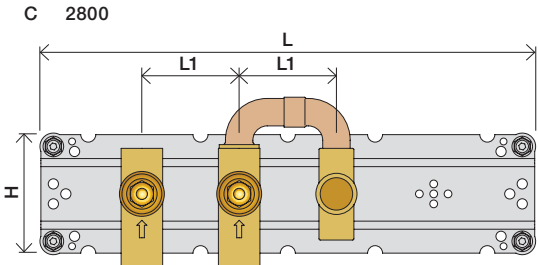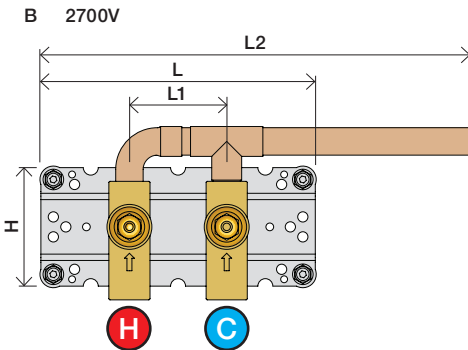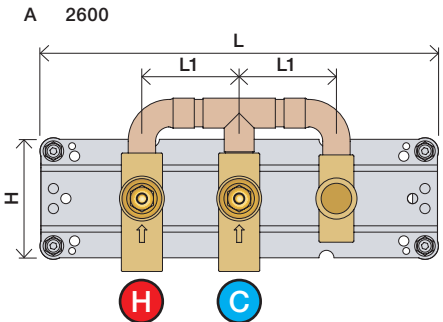


1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.

NB.
Boxen levereras inte av VOLA.
Utan köps genom ÅF eller Grossist.

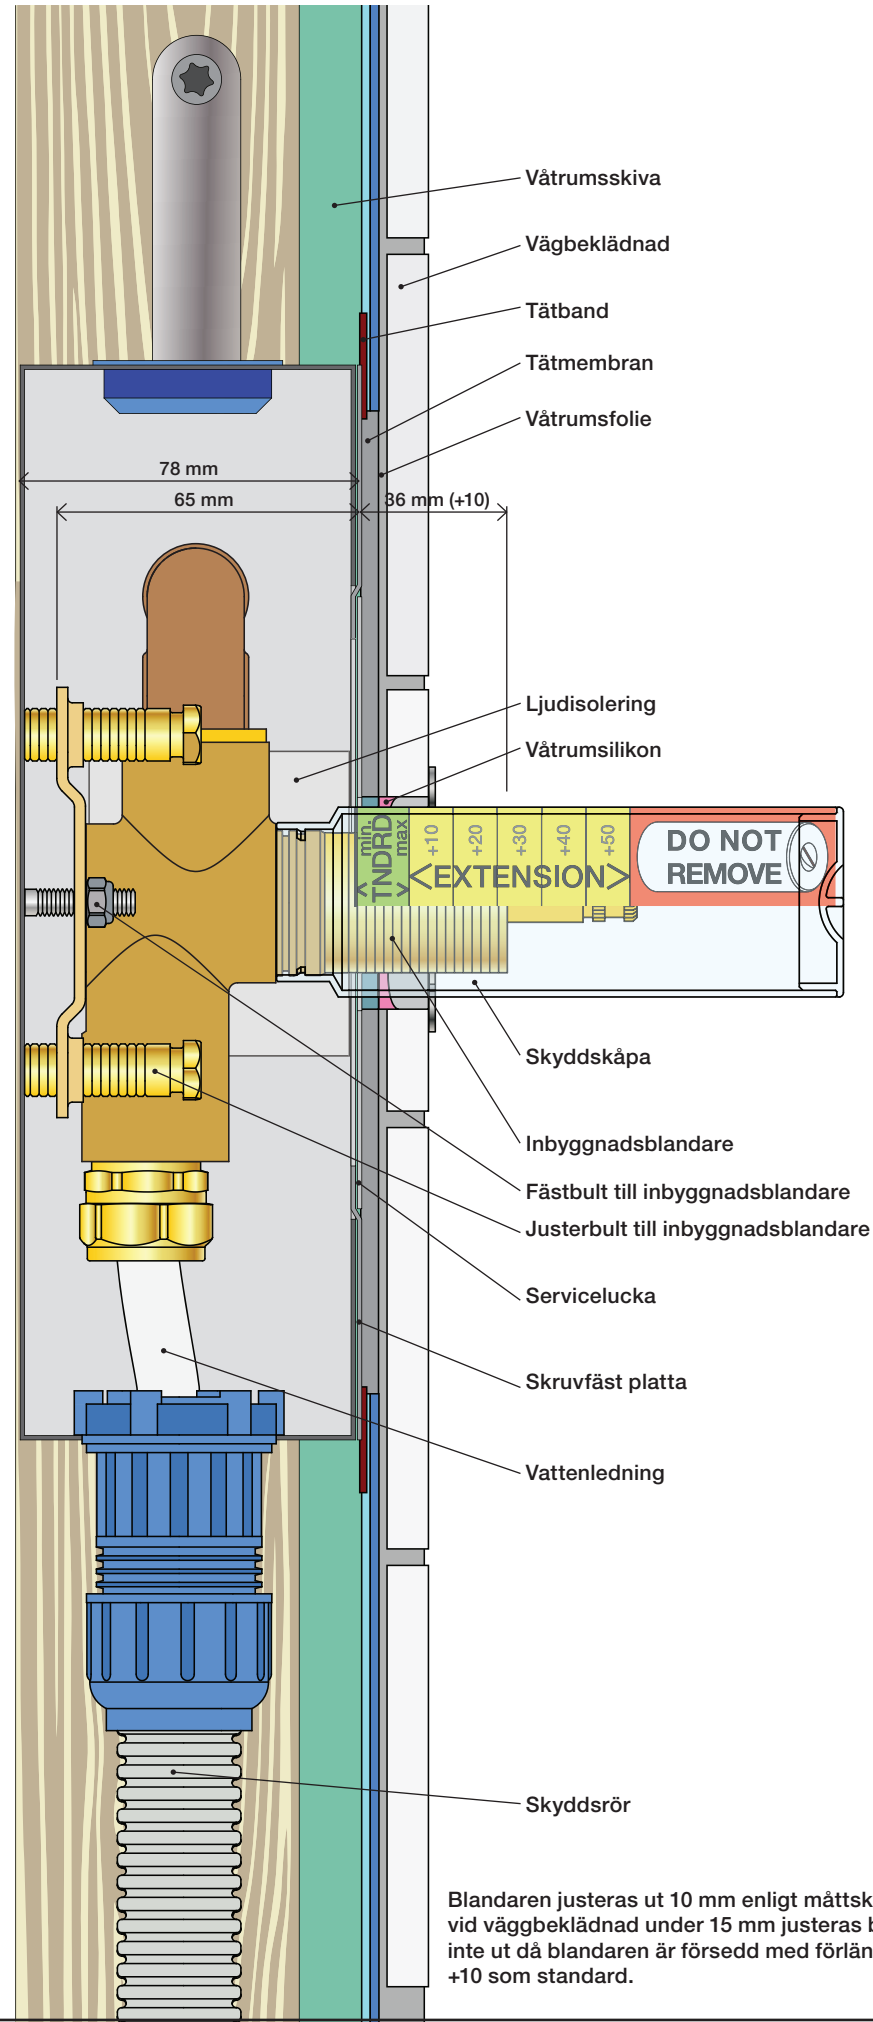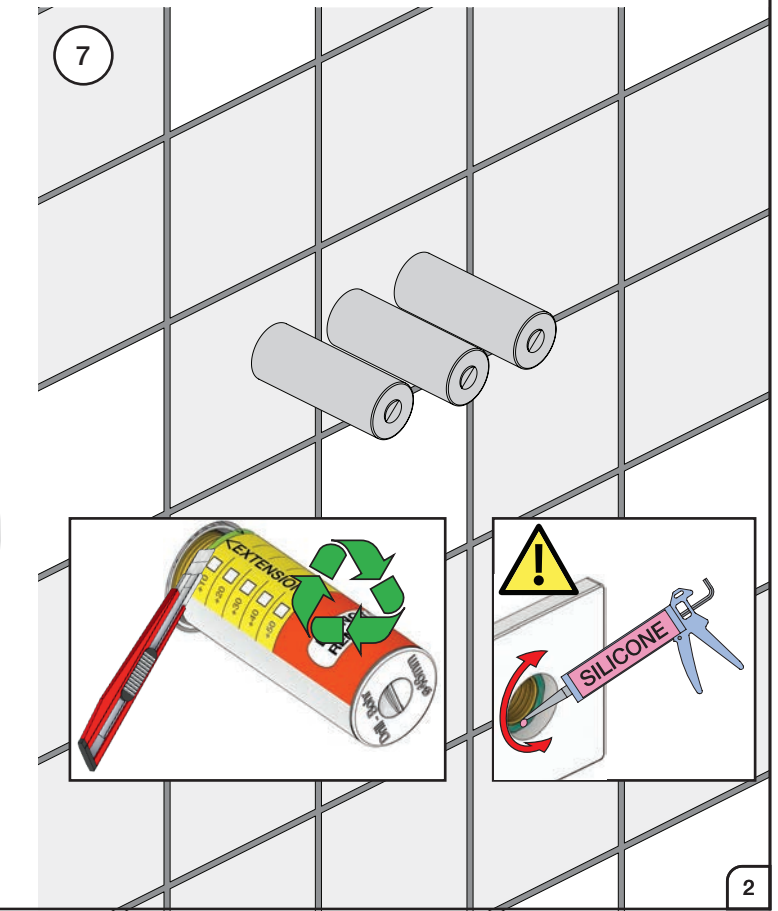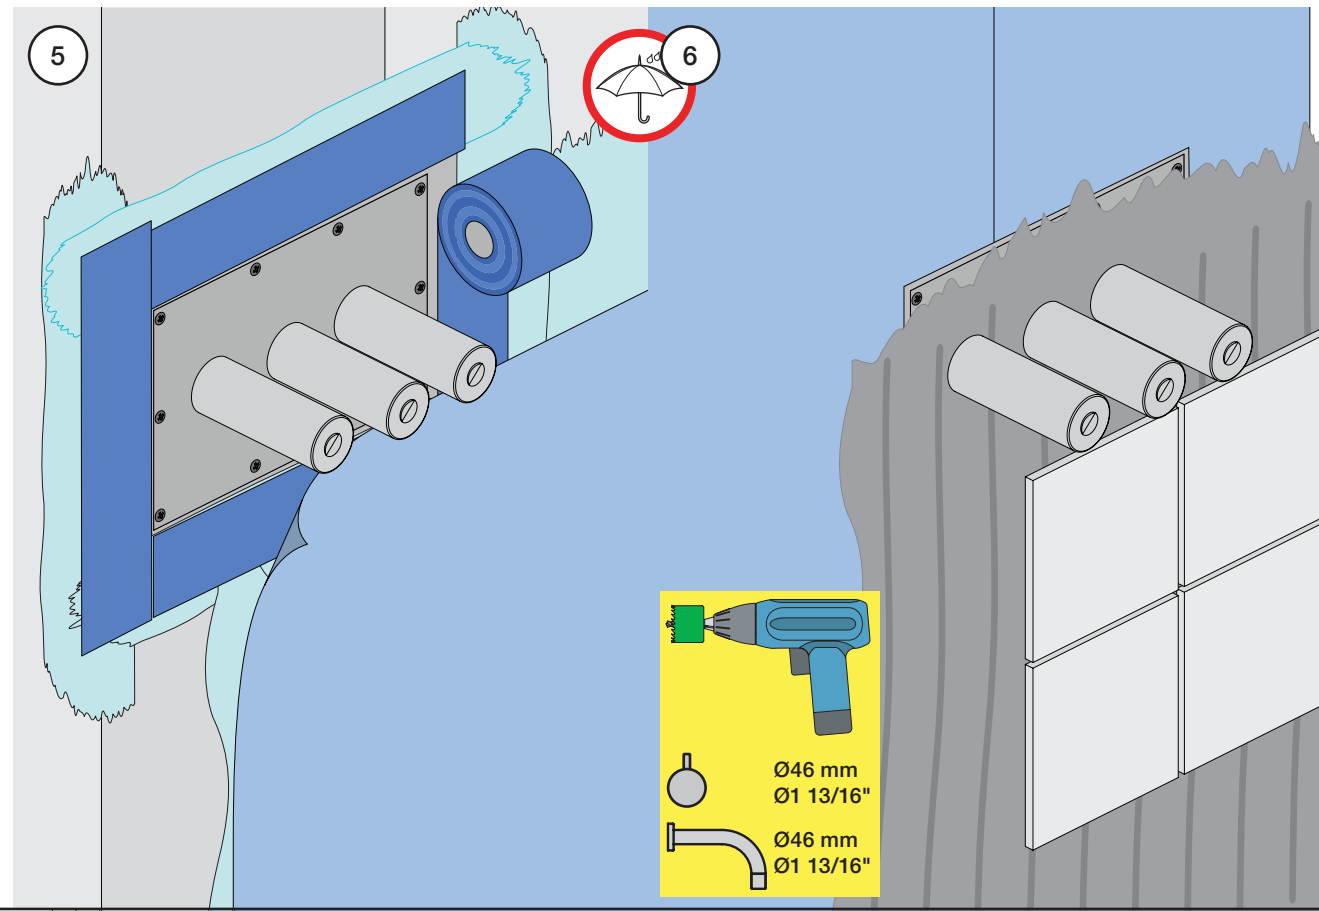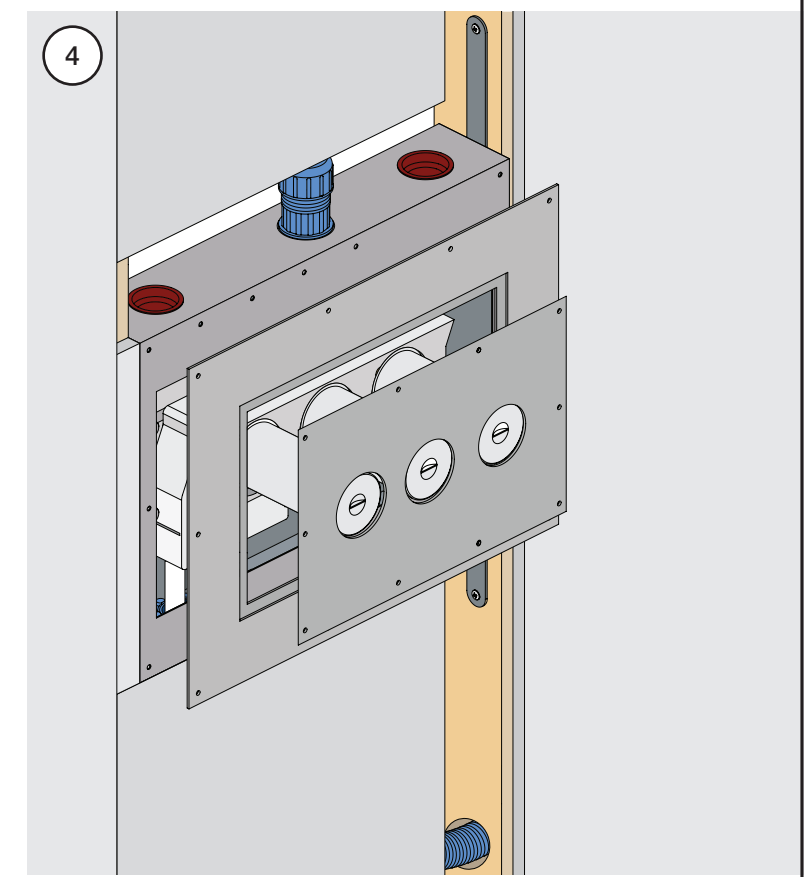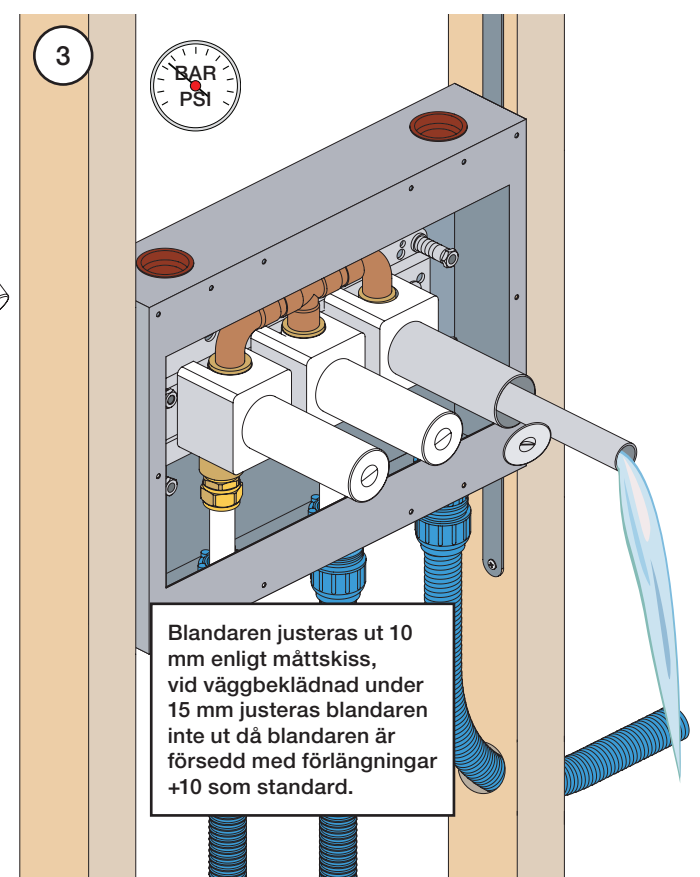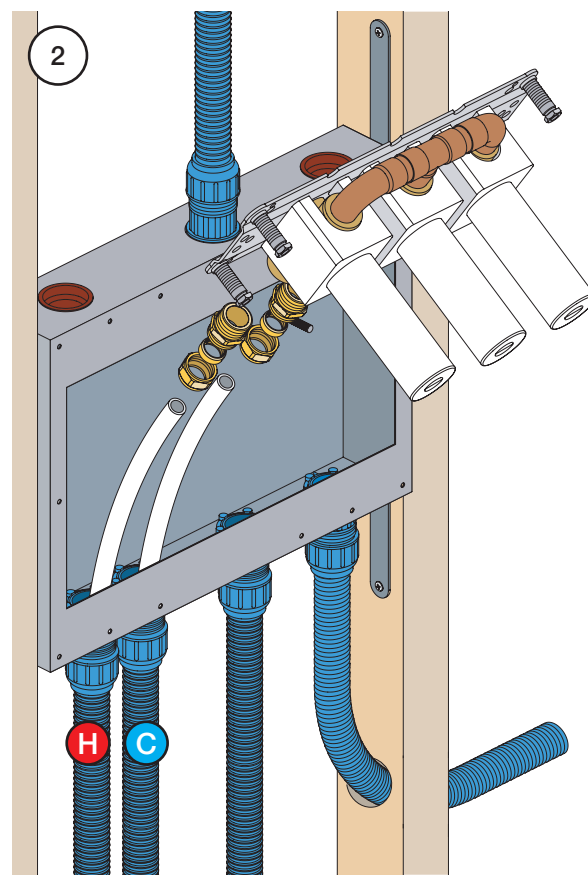

S21V

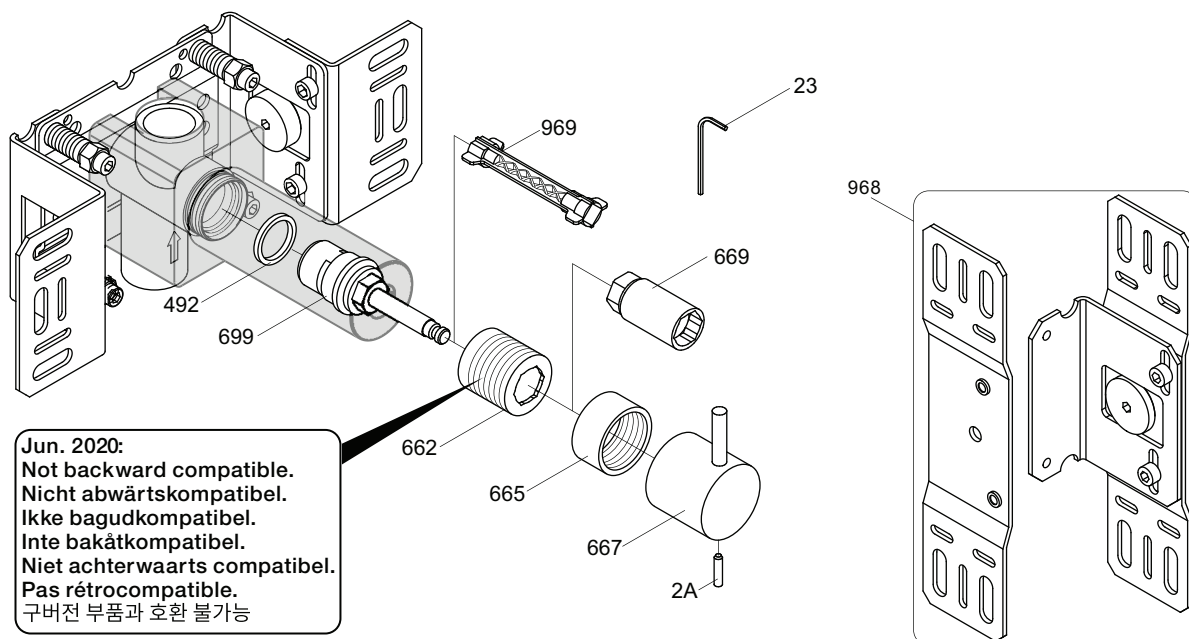

NR17: VR2A, VR23, VR665, VR667
 VR699K: VR23, VR492, VR669, VR699
 VR699K+: VR23, VR492, VR662+, VR669, VR699+

S21V 2928	S42V 2700V 2927	2600 2800V 2926	2900 2927
-	1034	003K	002
001G	2 x 001G	001, 2 x 001G	001, 001G
vola Lunavej 2 DK-8700 Horsens Tlf : + 45 7023 5500 sales@vola.com www.vola.com			Date May. 22 Rev. 3 Sheet SB 58
VOLA 2600 2700V, 2800V, 2900 S21V, S42V			