


VOLA 5100, 5100X, 5200V, 5300
VOLA 5400DV, 5400V, 5400NV, 5400TV & A3/A4
VOLA 5400FV, 5400RV, 5600V & A3/A4
VOLA 5400RVX, 5400TVX & A3/A4

Monteringsvägledning

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÄF eller Grossist.

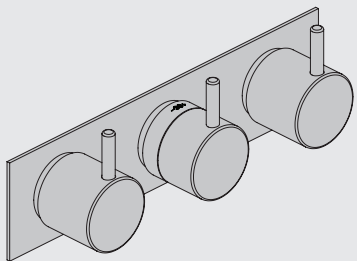

www.vola.com

SE_5000_V2 40998365
14-01-2022



vola

Max.: 10 Bar/145 psi

Max. 65°C, 150°F

5100/5200V/5300:



5400/5600A3:



- C

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

5400/5600:




5400/5600A4:




5400 5600	5400A3 5600A3	5400A4 5600A4		A	M	B	M	C	M	D
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-	-
Out 3	Out 2	Out 2	-	-	32/(8.5)	16/(4.2)	-	-	-	-
-	Out 3	Out 3	-	-	-	-	32/(8.5)	16/(4.2)	-	-
-	-	Out 4	-	-	-	-	-	-	16/(4.2)	32/(8.5)

Installations exempel: 5400NV

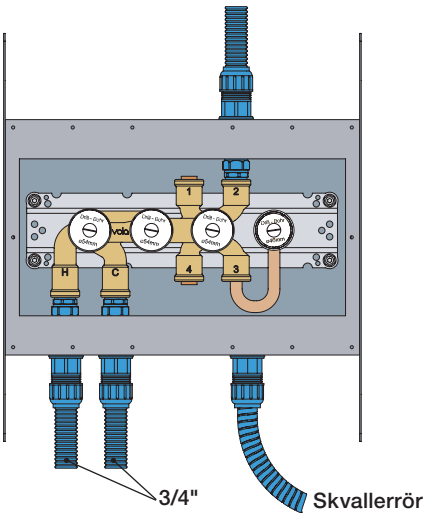


mm/Inch	L	L1	L2	L3	L4	H	H1	H2	H3
A	220 8 1/2"	-	-						
B	318 12 1/2"			60 2 3/8"		95 3 3/4"		130 5 1/8"	
C	396 15 1/2"	64 2 1/2"	78 3 1/16"		78 3 1/16"		127 5"		54 2 1/8"
D	474 18 1/2"				156 6 1/8"				


A: 5400DV/A3/A4




B: 5200V

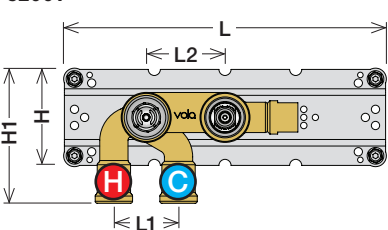


C: 5100X

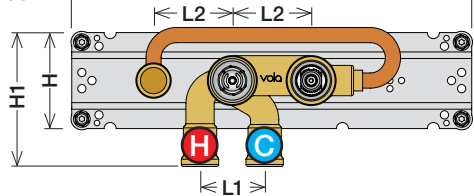


B: 5400V/A3/A4

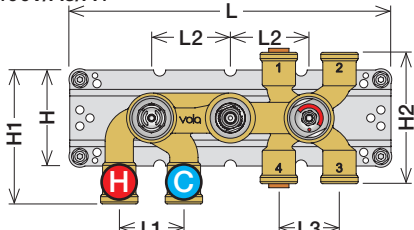


C: 5400TVX/A3/A4 - D: 5400RVX/A3/A4

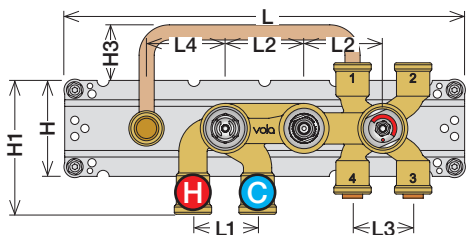


C: 5400TV/A3
D: 5400RV/A3

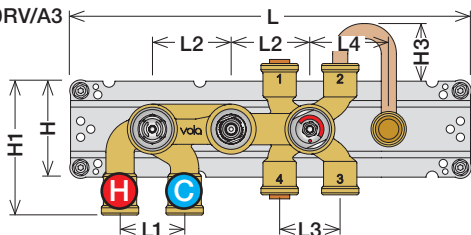


C: 5400NV/A3
D: 5400FV/A3

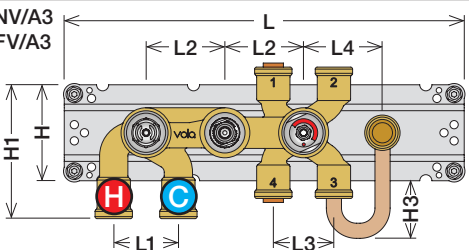


C: 5400NVA4
D: 5400FVA4

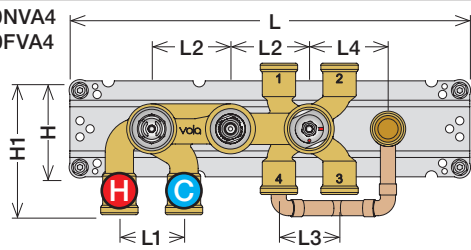


C: 5300

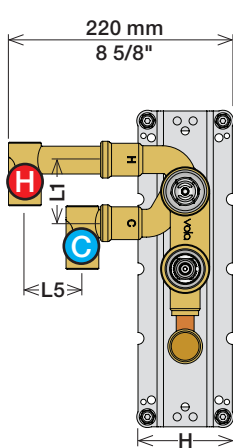

C: 5600V/A3/A4

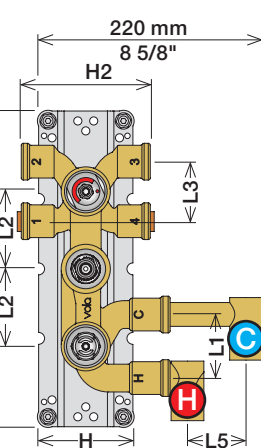


Förlängning

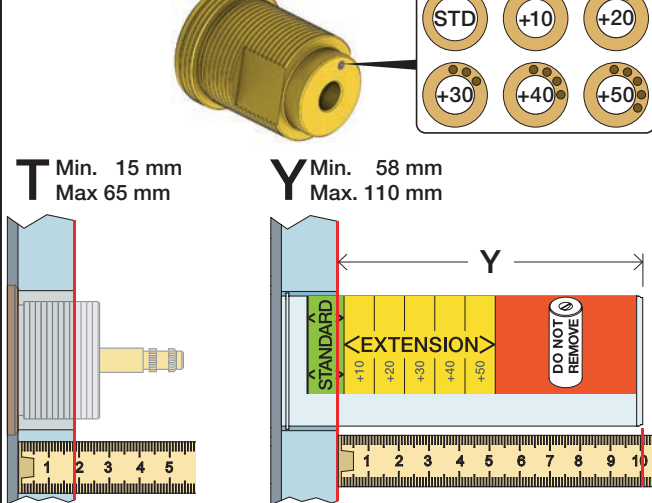

	T	Y	VR5250/VR5410/VR2019
3 - 15 mm	110 - 98 mm	Std.	
15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE	
25 - 35 mm	88 - 78 mm	+20	
35 - 45 mm	78 - 68 mm	+30	
45 - 55 mm	68 - 58 mm	+40	
55 - 65 mm	58 - 48 mm	+50	


Förlängning, eftermontering

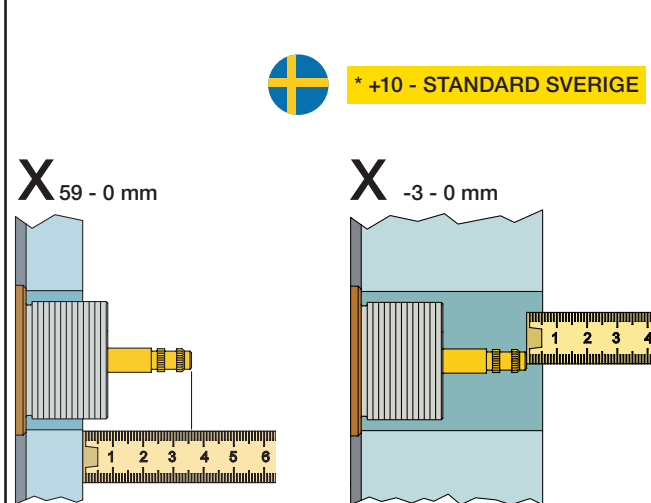


	X	VR5250/VR5410/VR2019
47 - 59 mm	Std.	
37 - 47 mm	+10	
27 - 37 mm	+20	
17 - 27 mm	+30	
7 - 17 mm	+40	
-3 - 7 mm	+50	

Montering av förlängning


VR5250

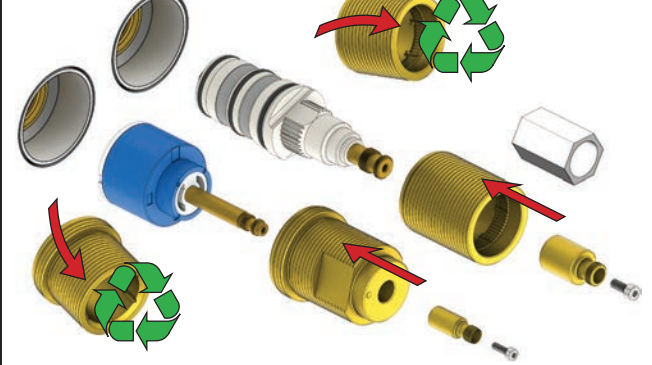

VR2019+, VR2119+









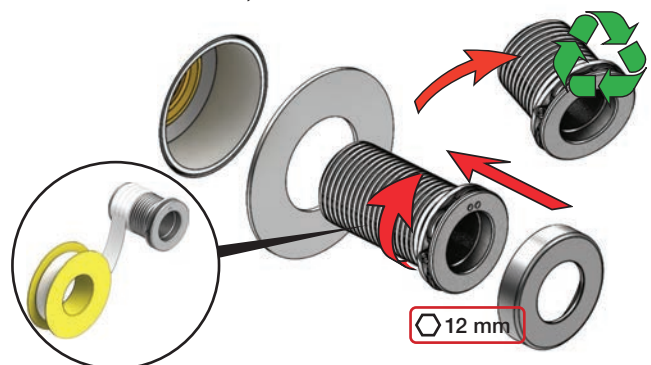


VR5410 IKKE 5100, 5100X, 5200V, 5300

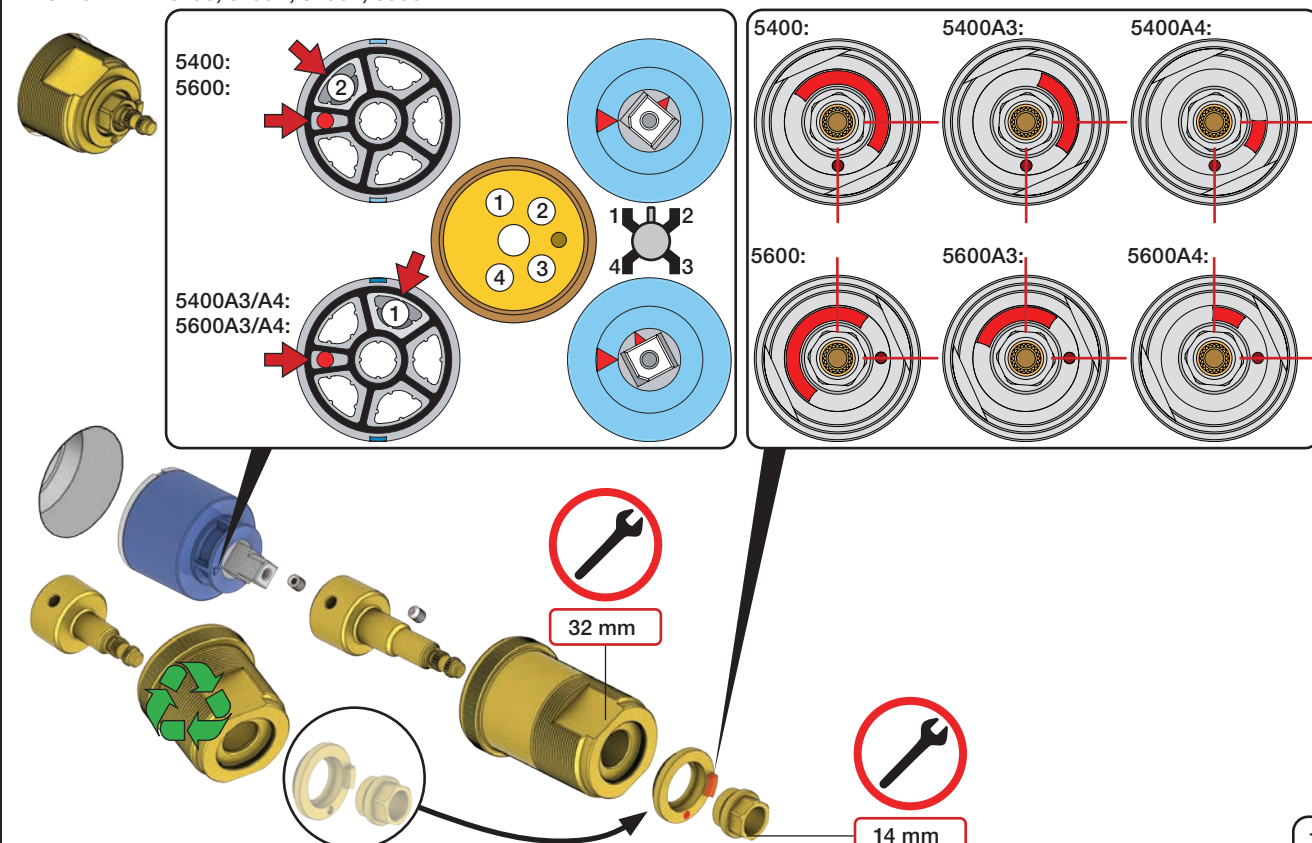


1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÅF eller Grossist.

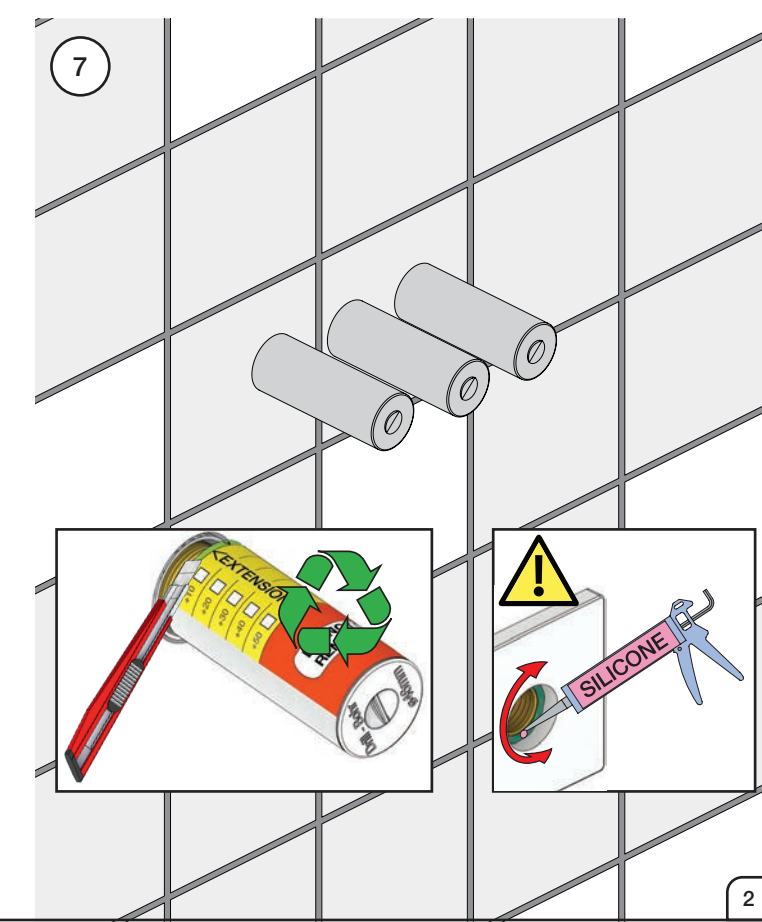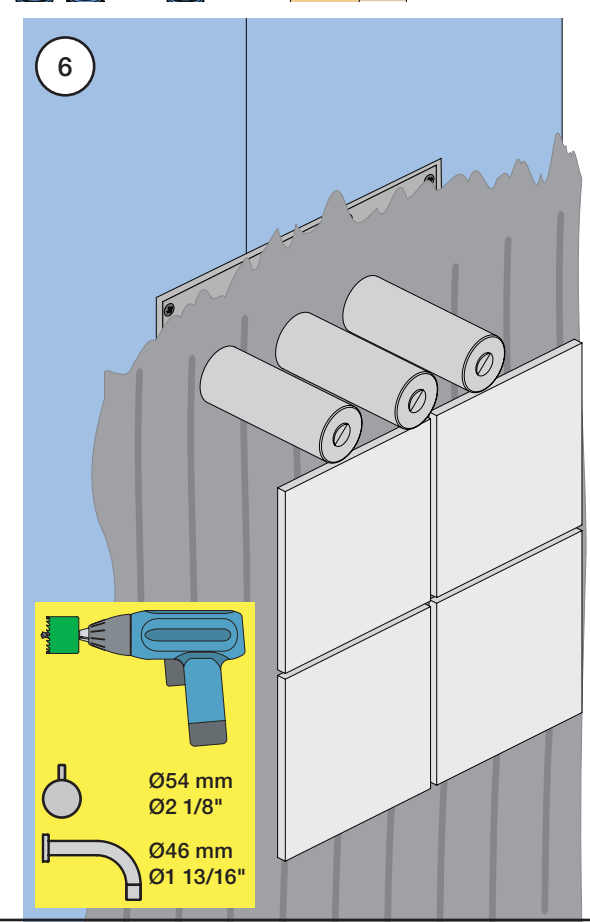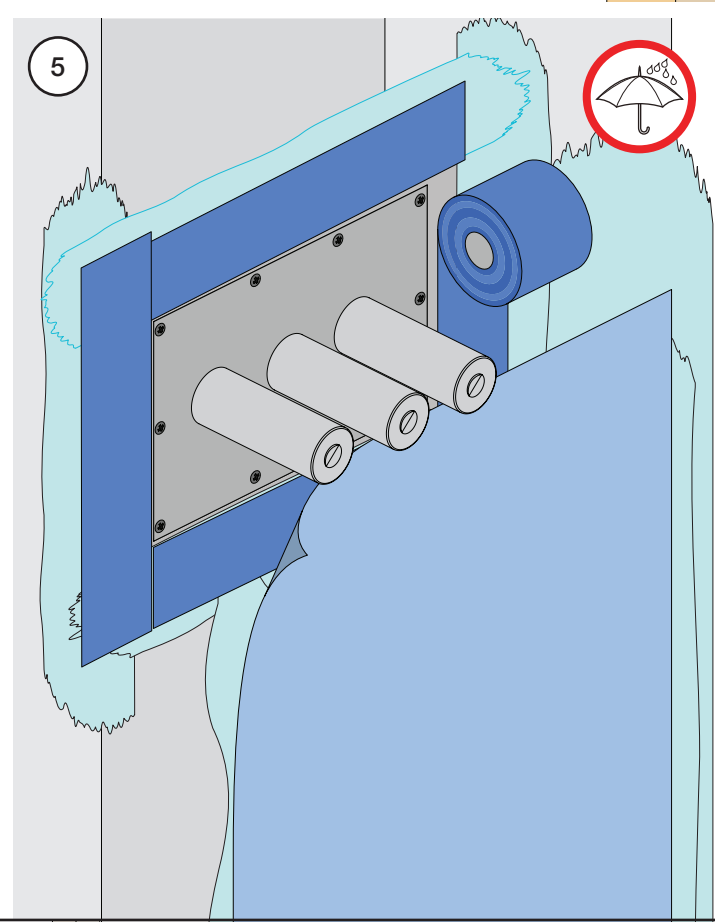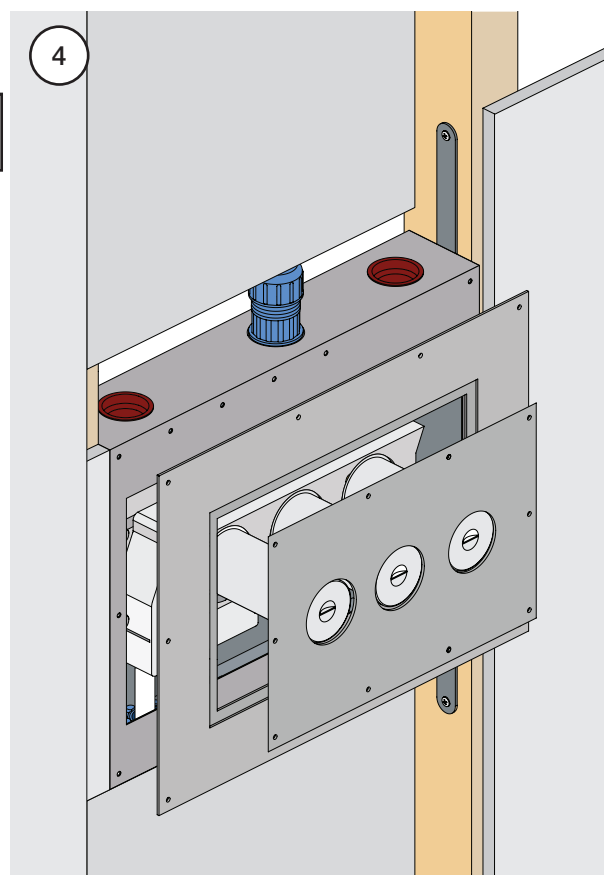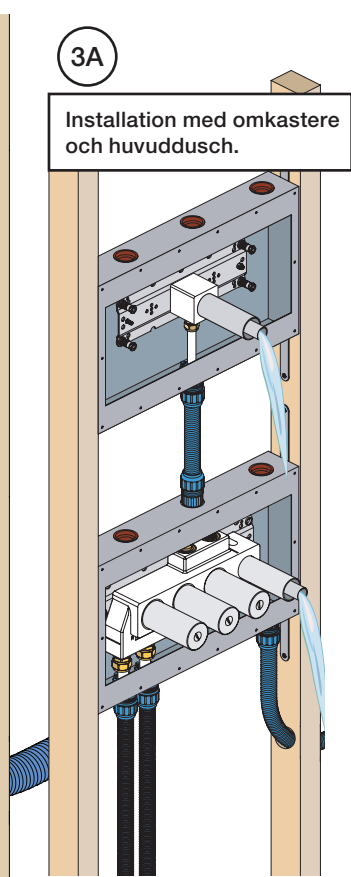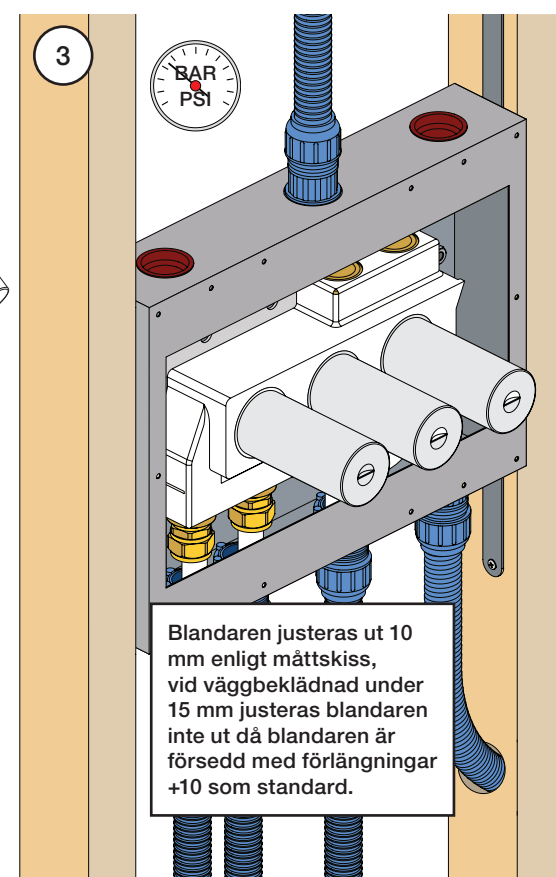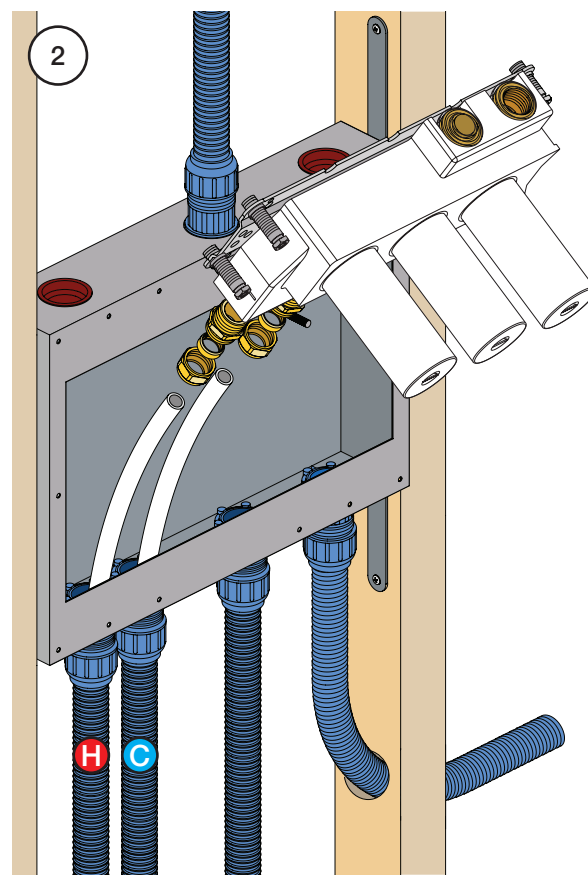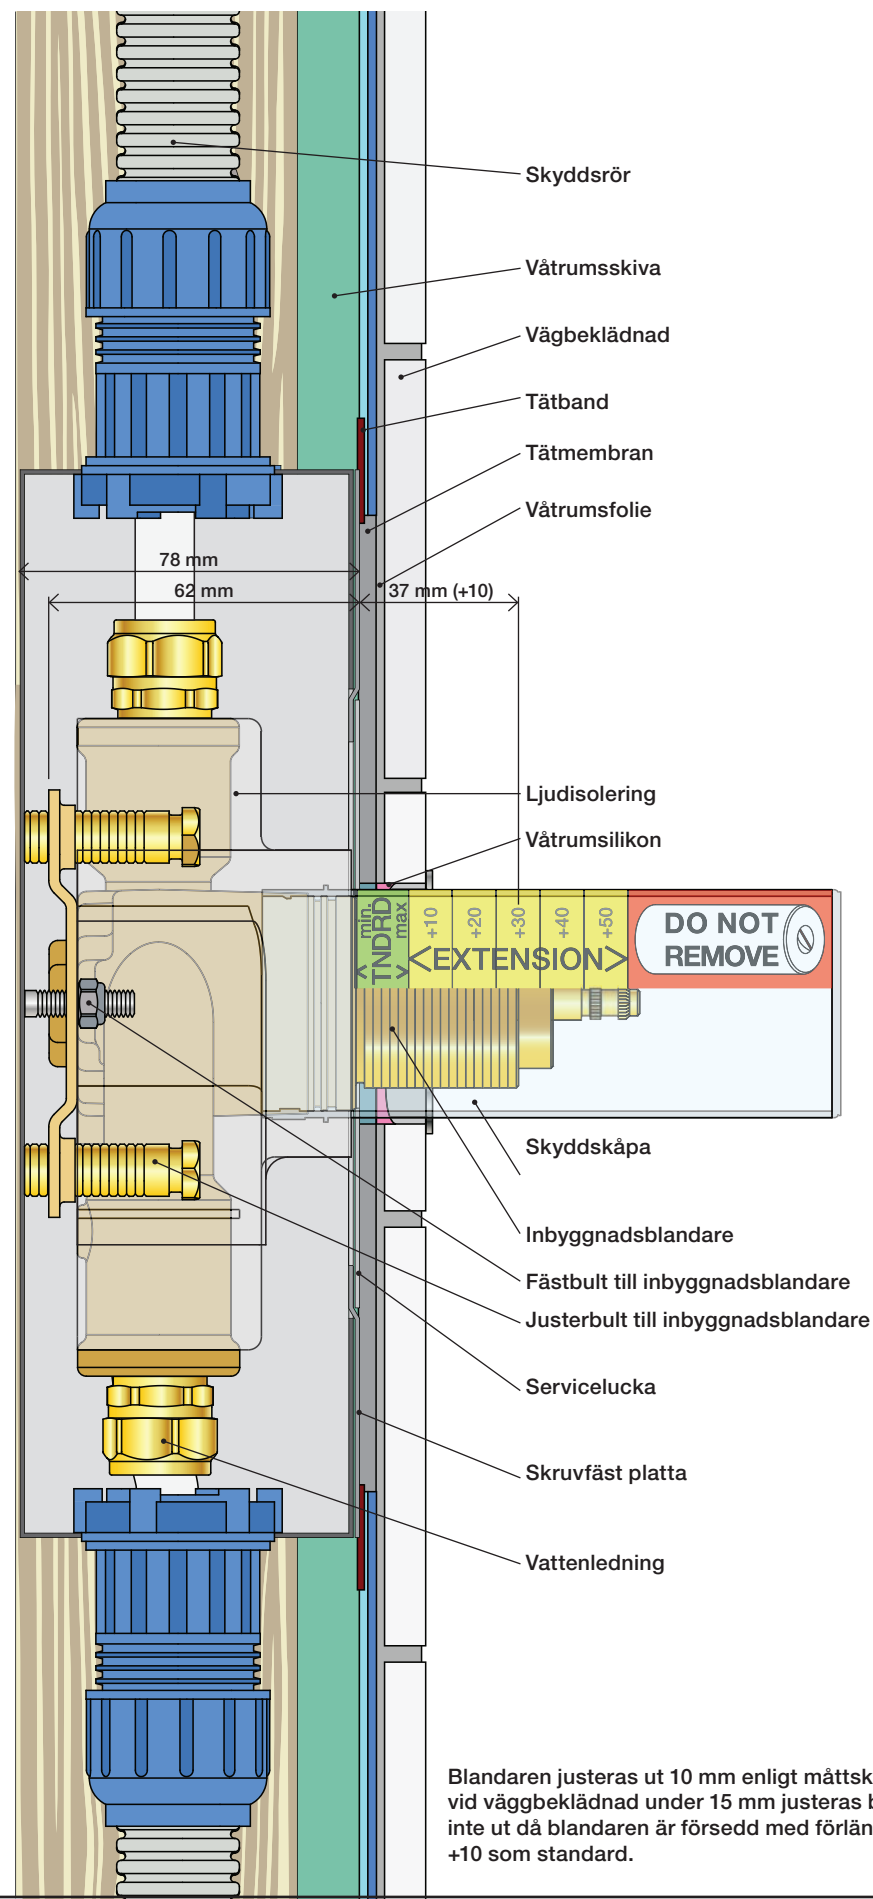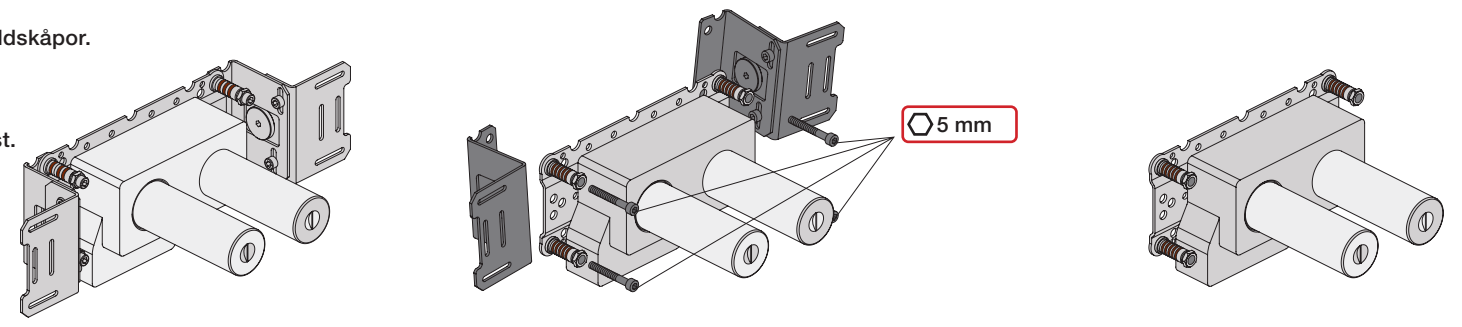


Blandaren justeras ut 10 mm enligt måttskiss,
vid väggbeklädnad under 15 mm justeras blandaren
inte ut då blandaren är försedd med förlängningar
+10 som standard.

5400VA3

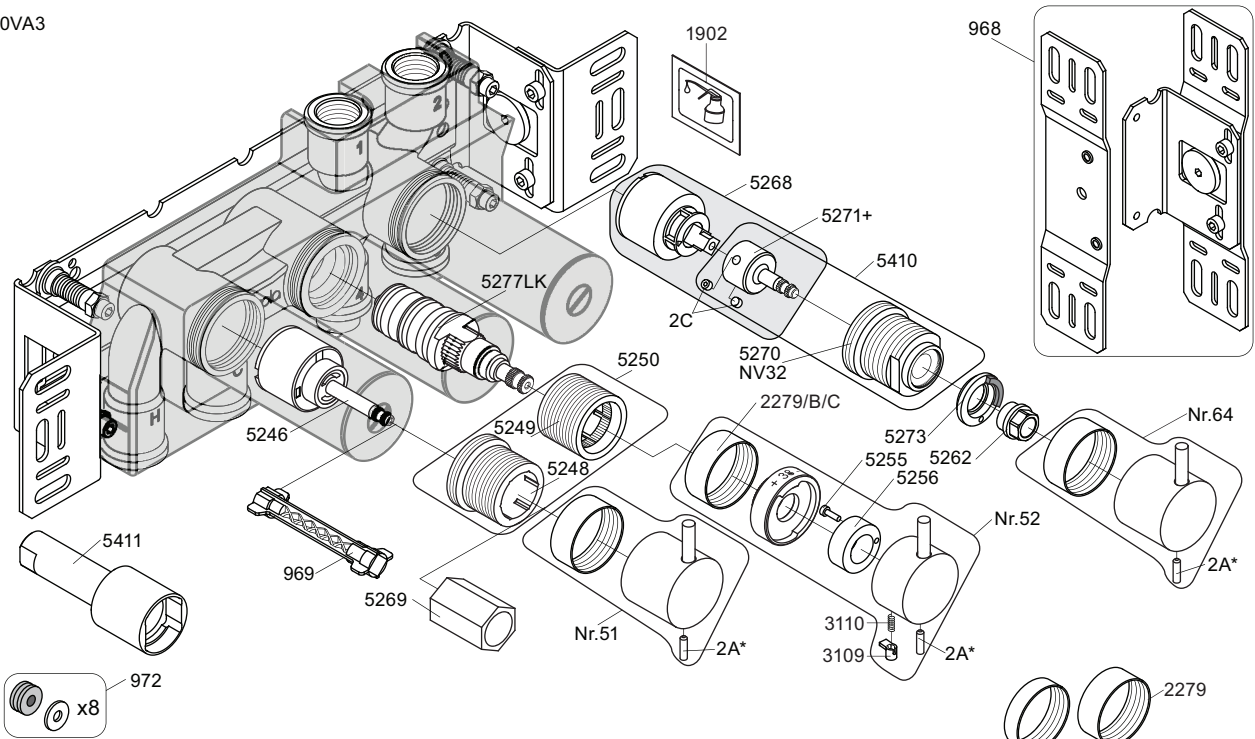

5250+ 5248+ 5257+ 5249+ 5258+ 5260+ 5259+	5410+ 5271+ 5270+ 2C	5268+ 1902 2C 5271+	2A* Color VR2A-Steel: Standard VR2A-F60: F17-F27-F60 VR2A-F63: F63-F64 VR2A-F65: F19-F65-F70
---	-------------------------------	------------------------------	---



NR51:	VR5251, VR2279+B+C, VR2A
NR52:	VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR2A
NR64:	VR5251, VR2279+B+C, VR2A
VR3113:	VR3109, VR3110, VR5255
VR5250+:	VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+:	VR5257+, VR5259+
VR5258+:	VR5258+, VR5260+
VR5268+:	2xVR2C, VR1902, VR5268, VR5271+
VR5410+:	2xVR2C, VR5270+, VR5271+

5400VA3 5600VA3 2929	5400NVA3 5400TVA3 2930	5400FVA3 5400RVA3 2929	5400DVA3 2934
 5003B	 5004B	 5004L	
 3x2001	 3x2001, 001	 3x2001, 001	 2001



vola
Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA 5400VA3
5400FVA3, 5400NVA3
5400RVA3, 5400TVA3
5600VA3

Date
May 22
Rev.
6
Sheet
SB 10.54