


VOLA 100, 100X, 200, 200V, 300
VOLA 400DV, 400, 400V, 400N, 400NV, 400T
VOLA 400TV, 400F, 400FV, 400R, 400RV
VOLA 2100, 2100X, 2200, 2200V, 2300, 2400
VOLA 2400V, 2400N, 2400NV, 2400T, 2400TV
VOLA 2400F, 2400FV, 2400R, 2400RV

Monteringsvägledning

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÄF eller Grossist.

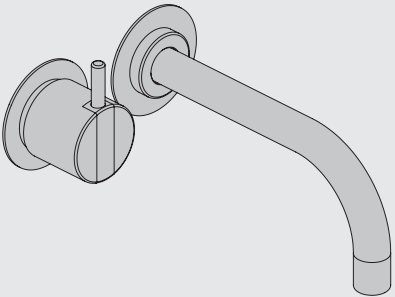

www.vola.com

SE_100-2100_V2 40998364
12-01-2022



Data, 3 Bar/43.5 Psi:


	l/min.	Gal/min.
100:	18,3	4.8
400V:	15,6	4.1
2100:	25,2	6.7
2400V:	22,2	5.9





Max. 65°C, 150°F

Max.: 10 Bar/145 psi


Installasjonsexempel: 2400NV

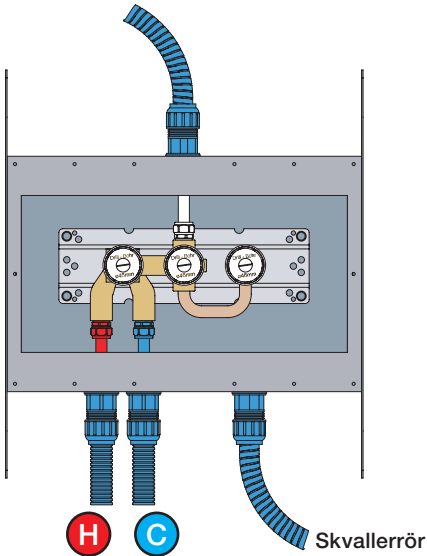


Förlängning



T Min. 15 mm
Max 65 mm



Y Min. 48 mm
Max. 110 mm

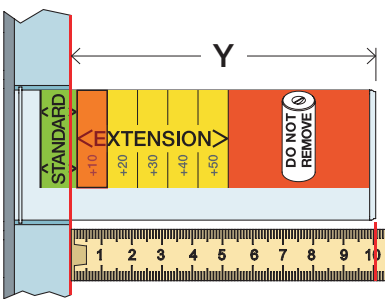


T	Y	VR1260/2260/1400/2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

Förlängning, eftermontering




* +10 - STANDARD SVERIGE

100 - 400:
62 - 0 mm

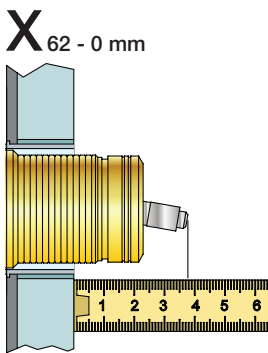

2100 - 2400:

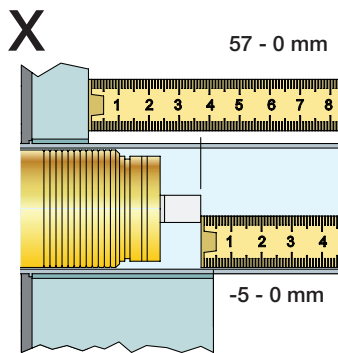


X	VR1260 + VR1400 + VR2019
50 - 52 mm	Std.
40 - 50 mm	+10
30 - 40 mm	+20
20 - 30 mm	+30
10 - 20 mm	+40
0 - 10 mm	+50


X	VR2260 + VR1400 + VR2019
45 - 57 mm	Std.
35 - 45 mm	+10
25 - 35 mm	+20
15 - 25 mm	+30
5 - 15 mm	+40
-5 - 5 mm	+50

	L	L1	L2	H
A	220 mm 8 1/2"		-	
B		78 mm 3 1/16"	-	95 mm 3 3/4"
C	318 mm 12 1/2"		-	
D			156 mm 6 1/8"	
E	396 mm 15 1/2"			


A 100, 2100, 200V, 2200V, 400V, 2400V




C 300, 2300

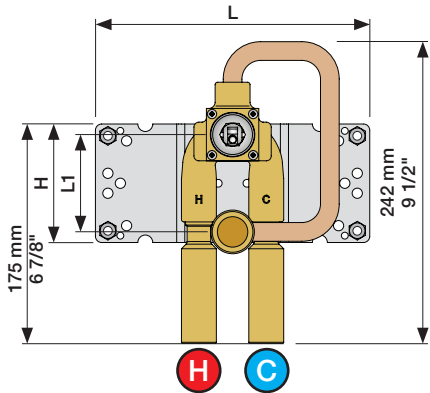


D 400NV, 2400NV, 400TV, 2400TV

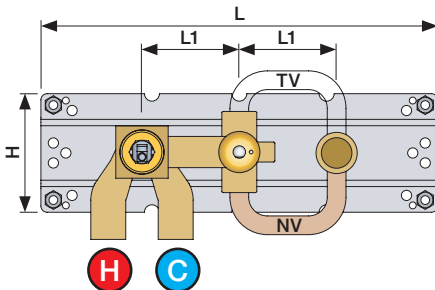

E 400FV, 2400FV, 400RV, 2400RV

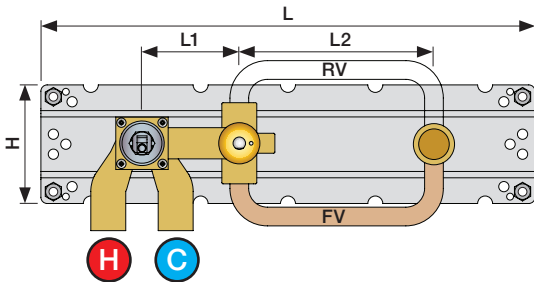


B 100X, 2100X




Montering av förlängning

VR1260+

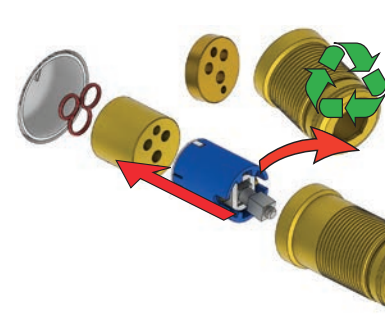


VR2260+

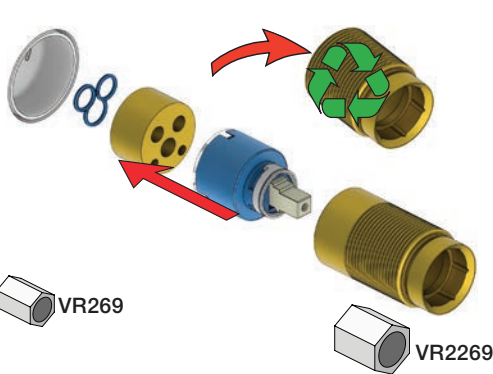


VR2019+, VR2119+



VR1400+









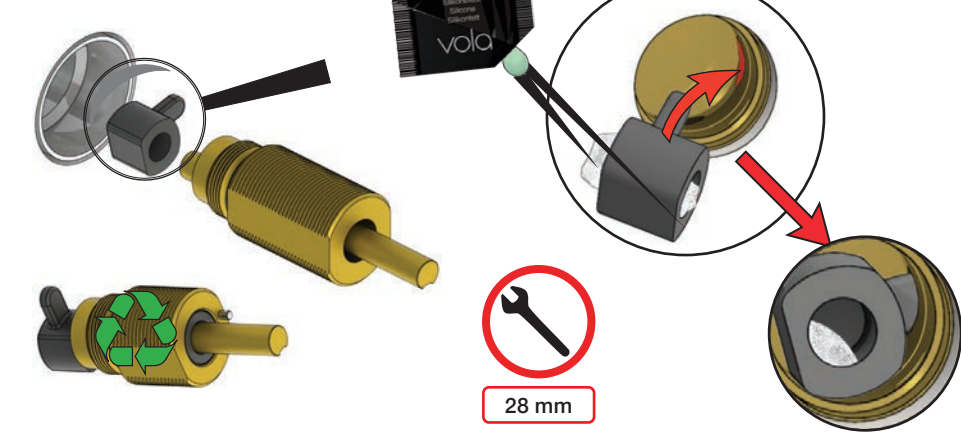


400-2400

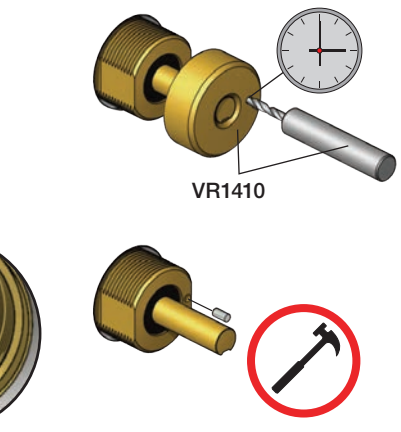

1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.

NB.
Boxen levereras inte av VOLA.
Utan köps genom ÅF eller Grossist.

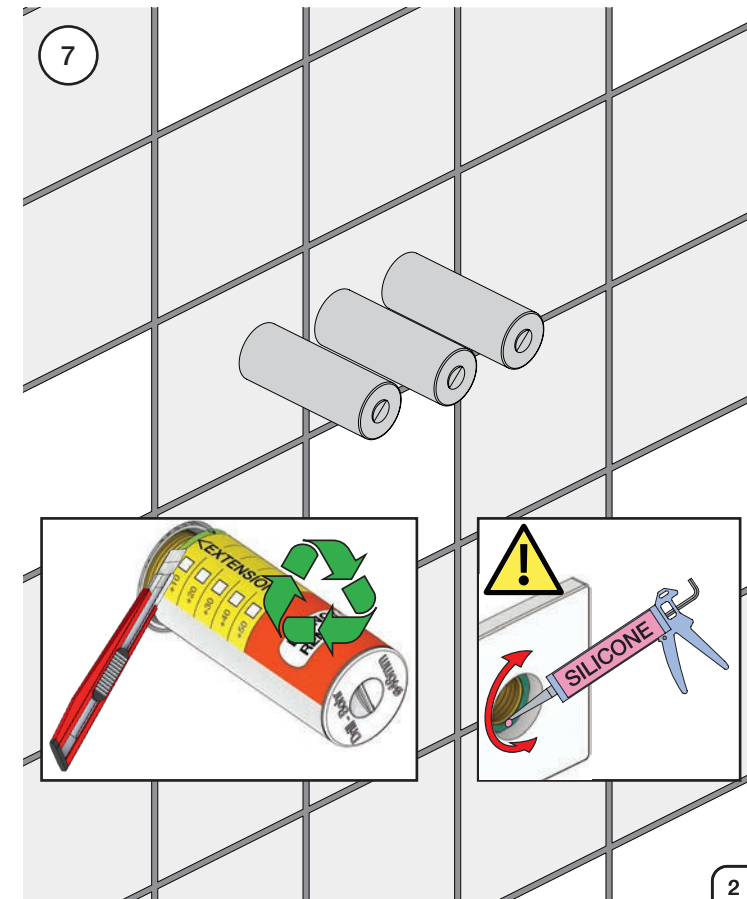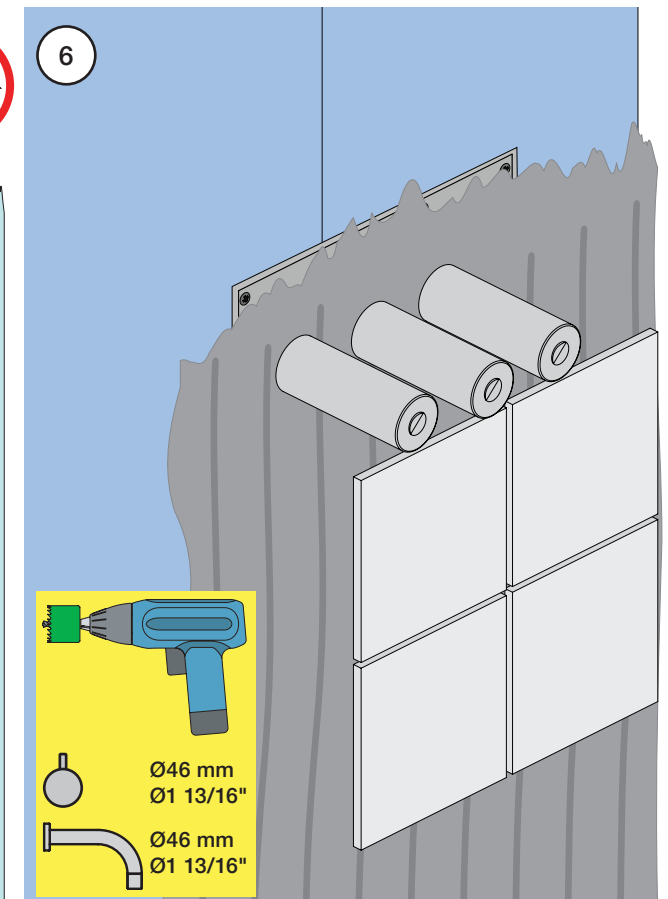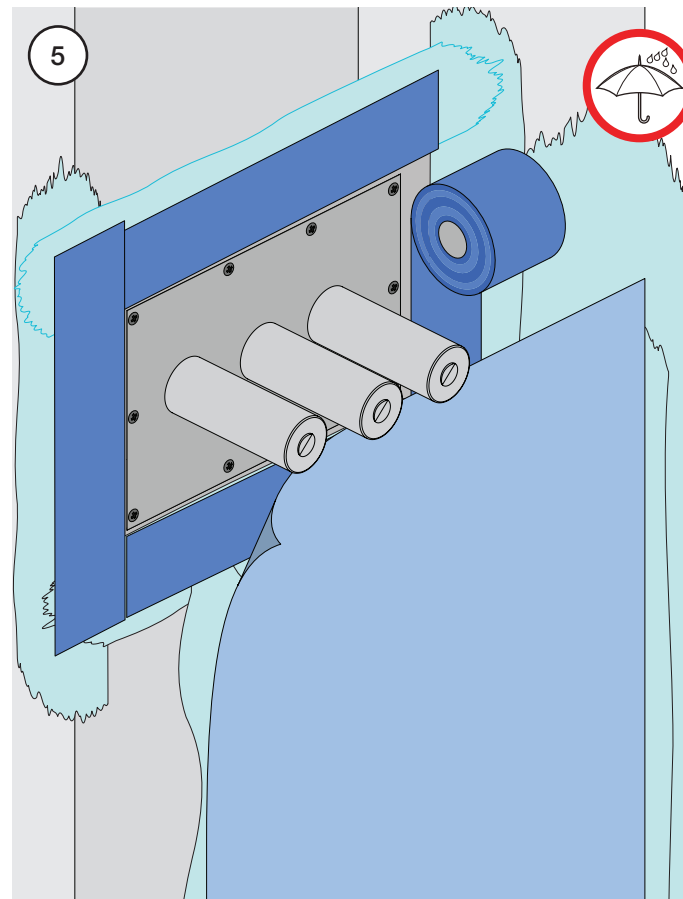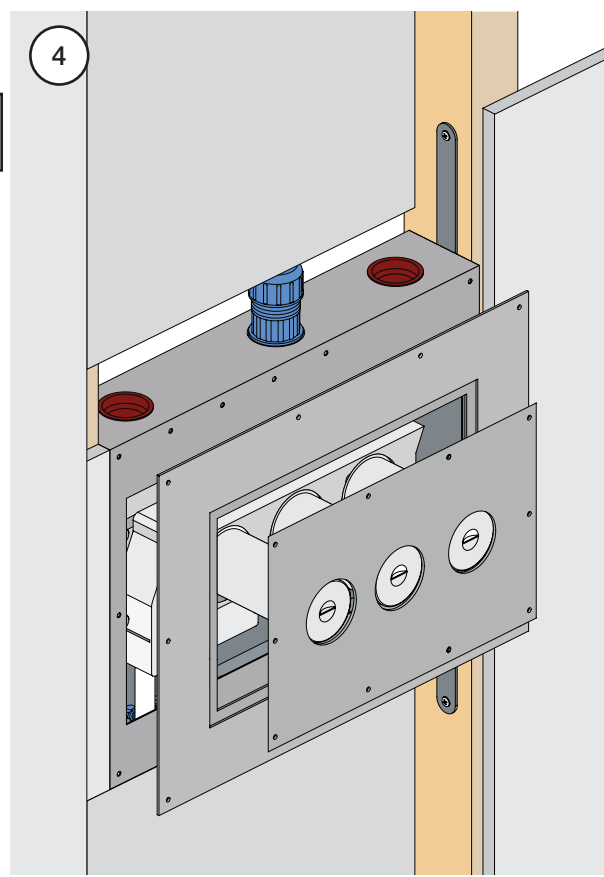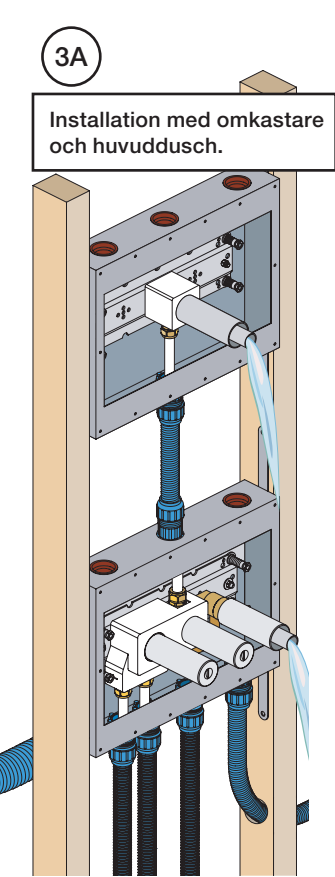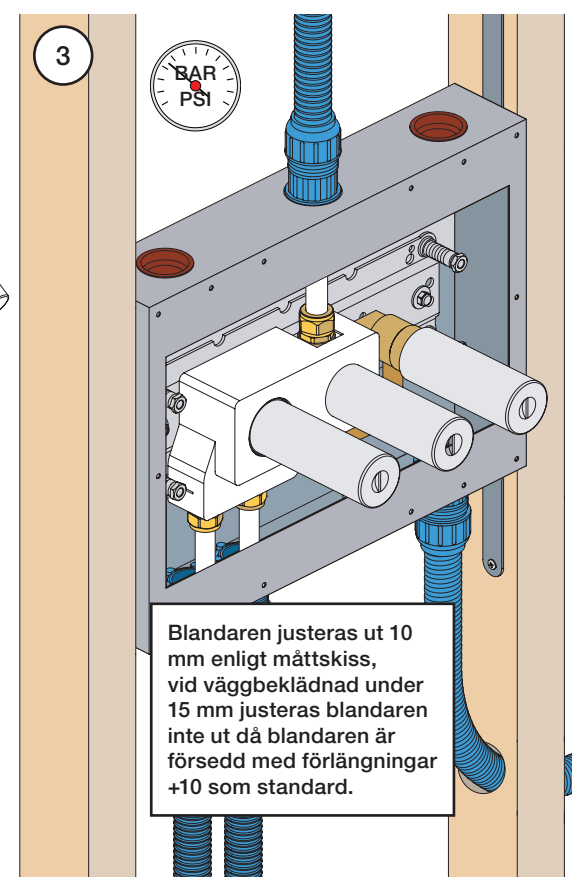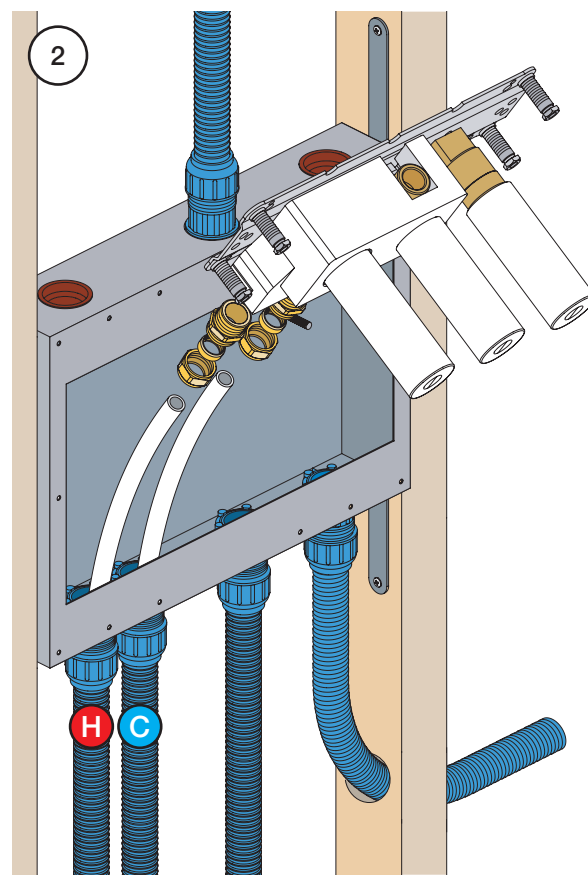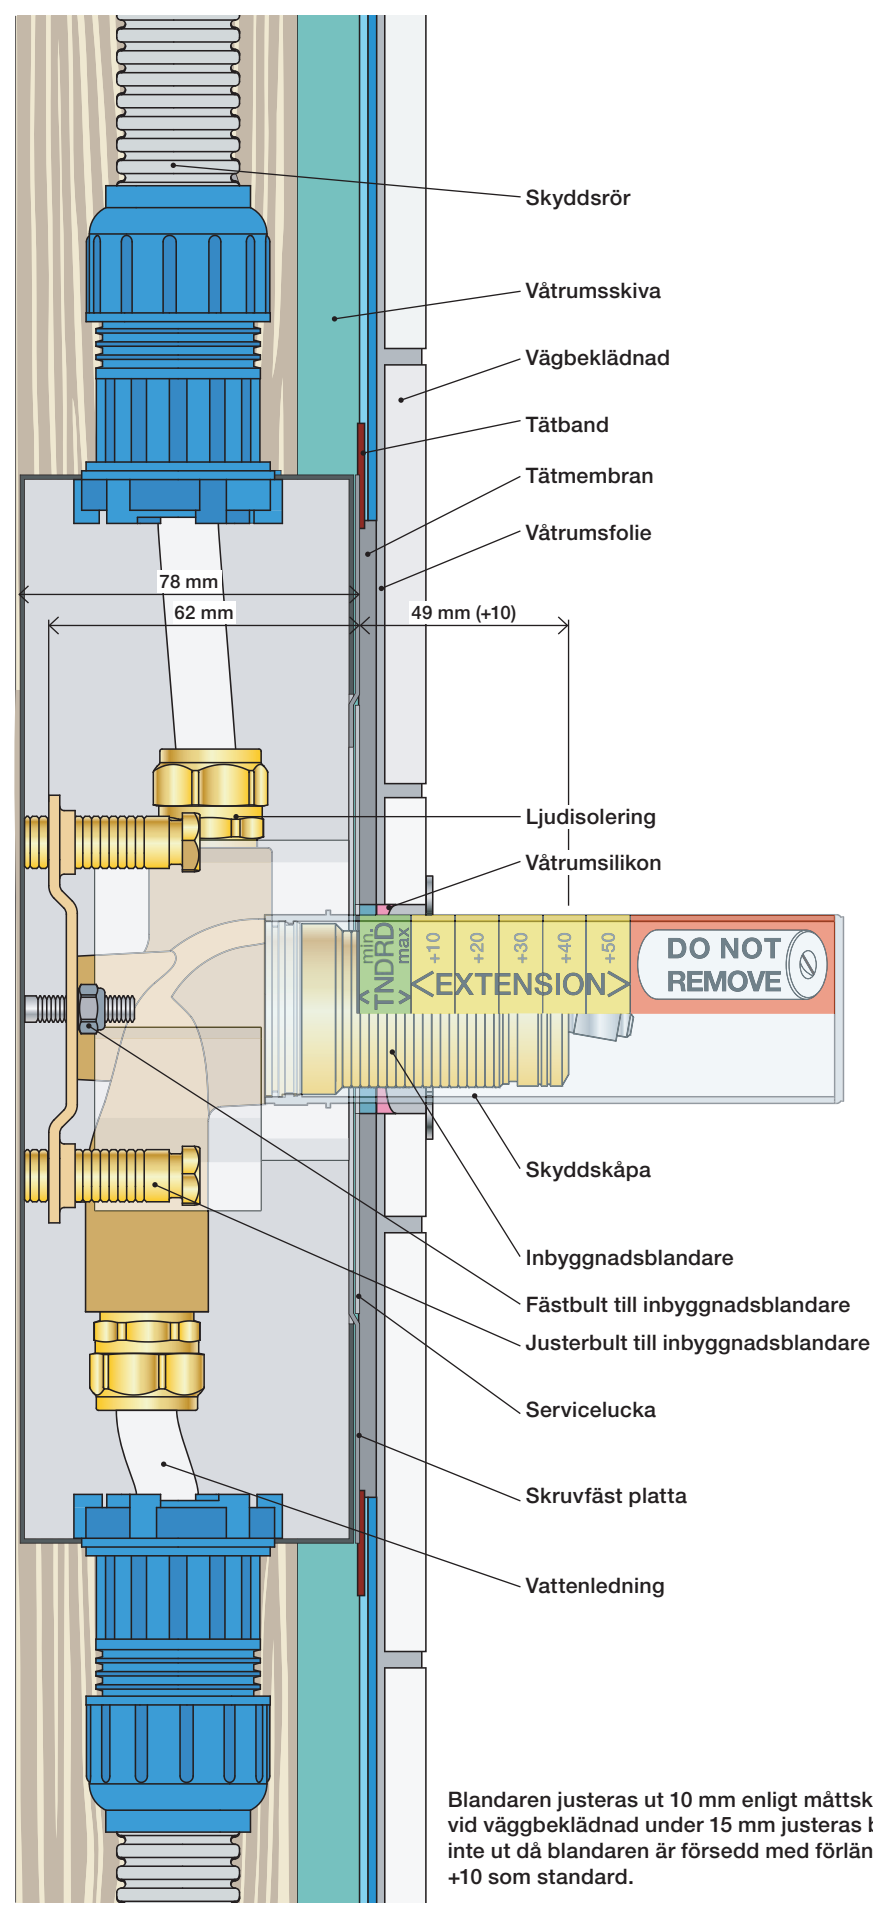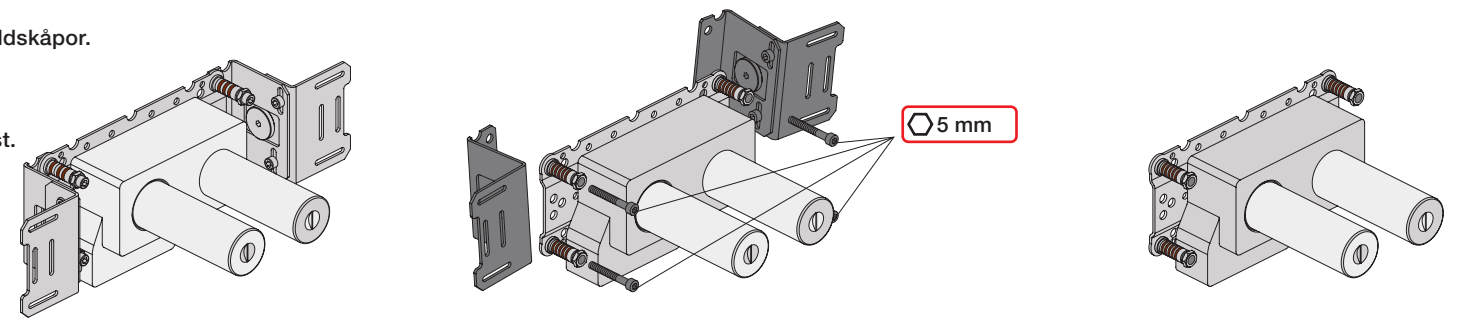

Blandaren justeras ut 10 mm enligt måttskiss,
vid väggbeklädnad under 15 mm justeras blandaren
inte ut då blandaren är försedd med förlängningar
+10 som standard.


VOLA 070, 070R, 070-HT2

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



Data	Bar:	1	2	3	4	5
070/070R	(l/min) (Gal/min)	9 2.5	9 2.5	9 2.5	9 2.5	9 2.5
070-HT2	(l/min) (Gal/min)	9 2.5	12 3.2	15 4.0	17 4.5	19 5
	Max. 65°C. 150°F					





VR161:
VR161K: 7 l/min - 1.8 Gal/min (Cal Green)




070

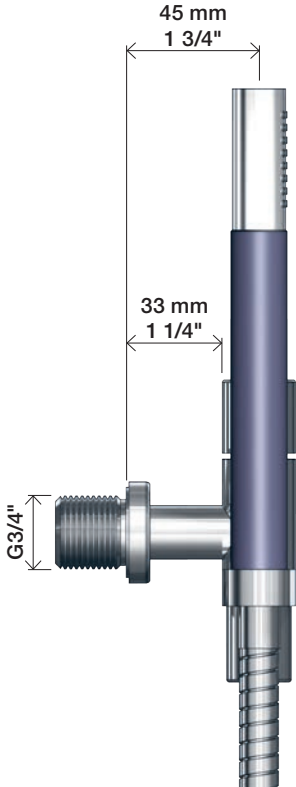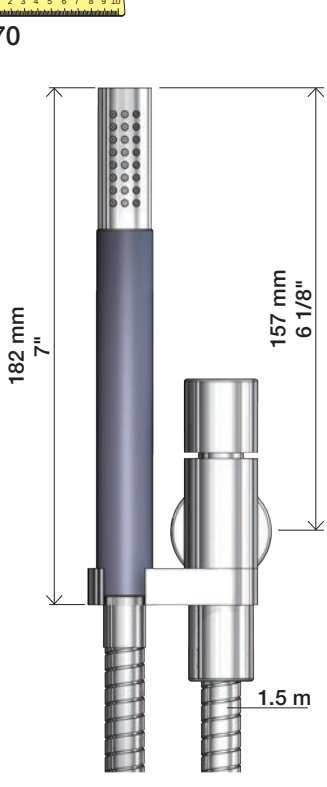


070R

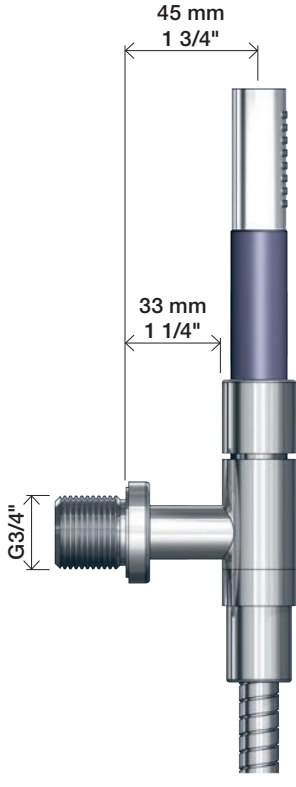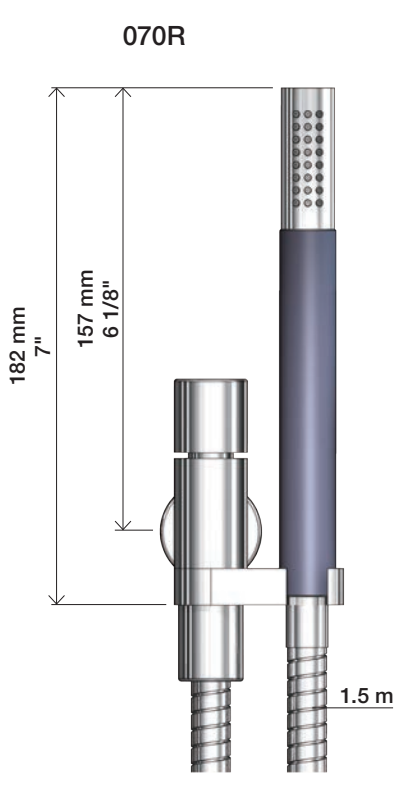


070-HT2

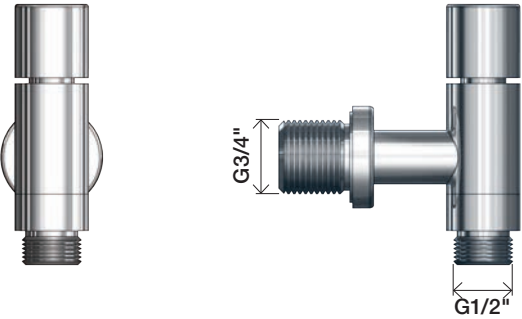


1

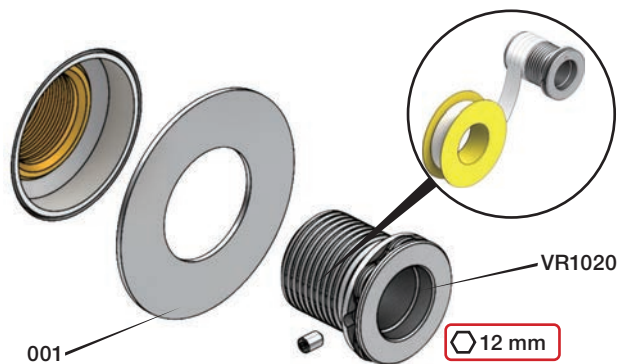


2

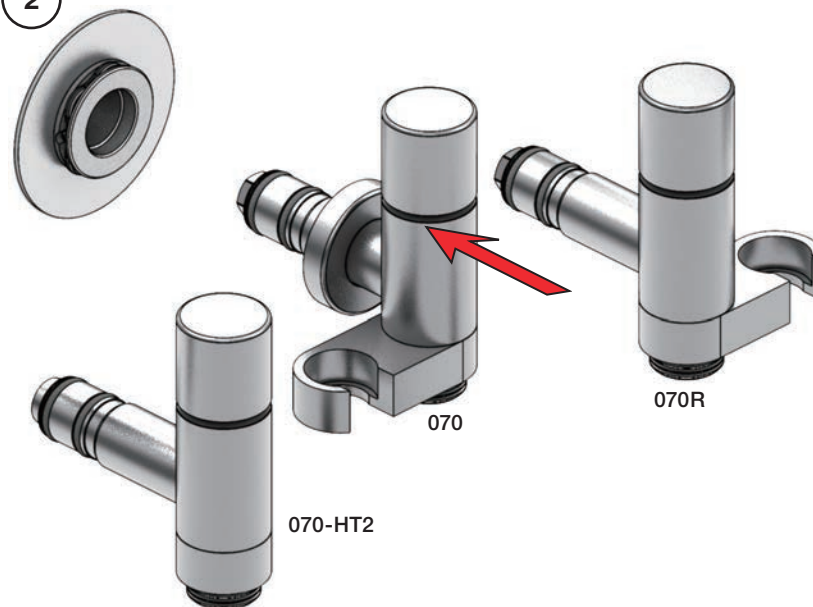

3

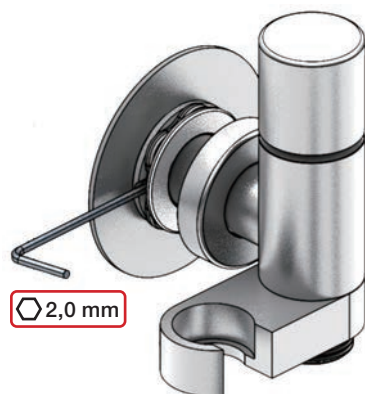

2

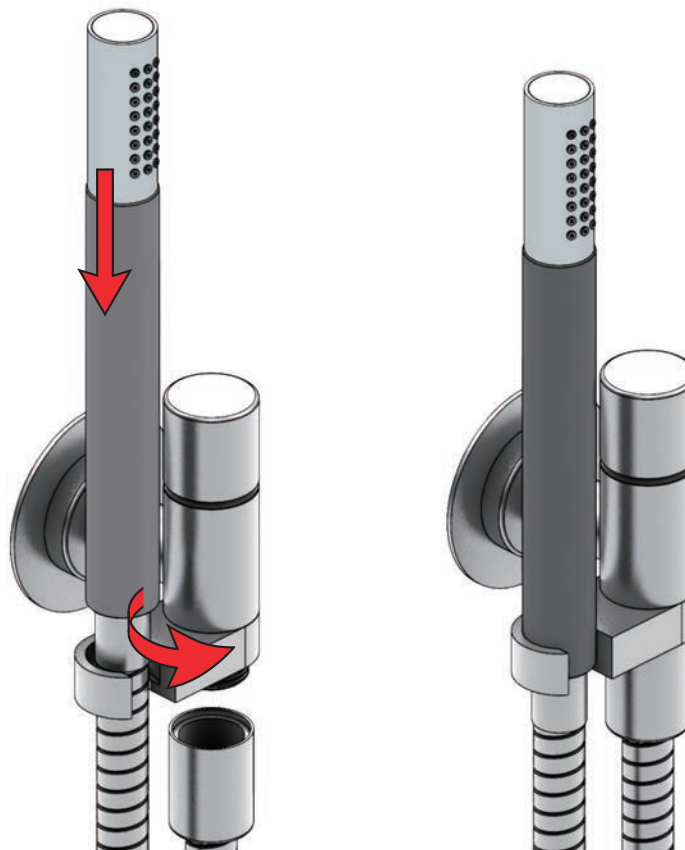


Extension
Verlängerung


Forlængerdele
Förlängning

Verlengstukken
Modification

T Min. 3 mm
Max. 65 mm




Y Min. 48 mm
Max. 110 mm

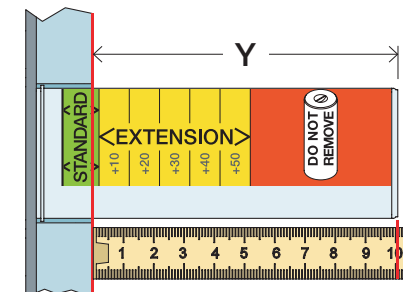


T	Y	VR2019
3 - 15 mm	110 - 98 mm	Std.
15 - 25 mm	98 - 88 mm	+10
25 - 35 mm	88 - 78 mm	+20
35 - 45 mm	78 - 68 mm	+30
45 - 55 mm	68 - 58 mm	+40
55 - 65 mm	58 - 48 mm	+50

VR2019+

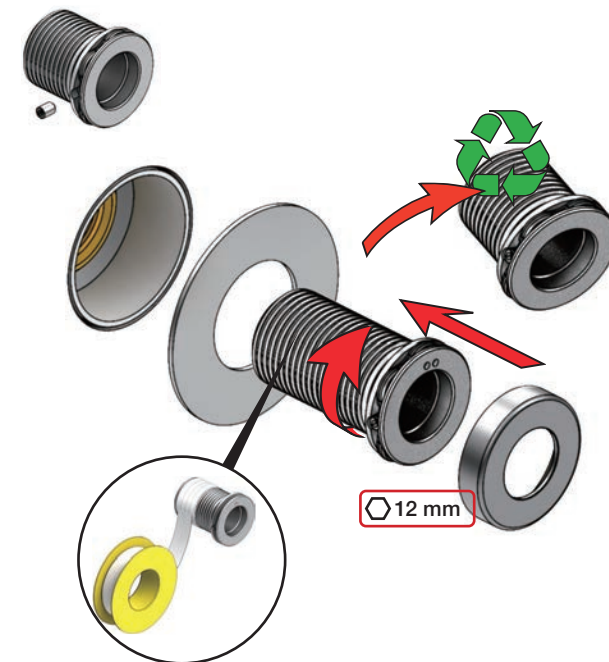

Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
* Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana



*Membran används inte i SVERIGE,
ihop med inbygggnadsboxen.


NR.21:

1

NR.28+19+24:


2

Förlängning
Verlängerung
Forlængelse
Modification



VR2260/VR1400/VR2019


Tiles:	3 - 15 mm	Std.
Fliesen:	15 - 25 mm	+10
Fliser:	25 - 35 mm	+20
Tegels:	35 - 45 mm	+30
Carreaux:	45 - 55 mm	+40
	55 - 65 mm	+50




VR2260/VR1400/VR2019

	35 - 47 mm	Std.
	25 - 35 mm	+10
	15 - 25 mm	+20
	5 - 15 mm	+30
	-5 - 5 mm	+40
	-15 - -5 mm	+50

NR 21



NR 21 - 1



VR2279


VR2279B

VR2279C




		A
VR2279	16 mm	30 - 34 mm
VR2279B	12 mm	26 - 30 mm
VR2279C	8 mm	22 - 26 mm


NR 21 - 2




NR 21 - 3




NR 21 - 4






VR1260/VR1400/VR2019		
Titles: Fliessen: Fliessen:	Tegels: 3 - 15 mm	Std.
	Carreaux: 15 - 25 mm	+10
	25 - 35 mm	+20
	35 - 45 mm	+30
	45 - 55 mm	+40
	55 - 65 mm	+50




VR1260/VR1400/VR2019		
	40 - 52 mm	Std.
	30 - 40 mm	+10
	20 - 30 mm	+20
	10 - 20 mm	+30
	0 - 10 mm	+40
	-10 - 0 mm	+50

NR 19/NR24



NR 19:
Ø40 mm
Ø1 5/8"
NR 24:
Ø43 mm
Ø1 3/4"

NR 28




NR 28 - 1

VR3279

VR3279B

NR 28 - 2

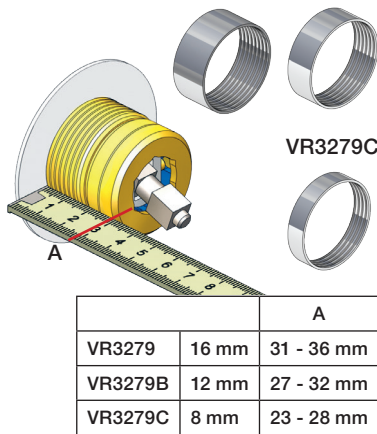


	A	
VR3279	16 mm	31 - 36 mm
VR3279B	12 mm	27 - 32 mm
VR3279C	8 mm	23 - 28 mm

NR 19 - 1 NR 24 - 1

VR2204


VR2204B

VR2204C

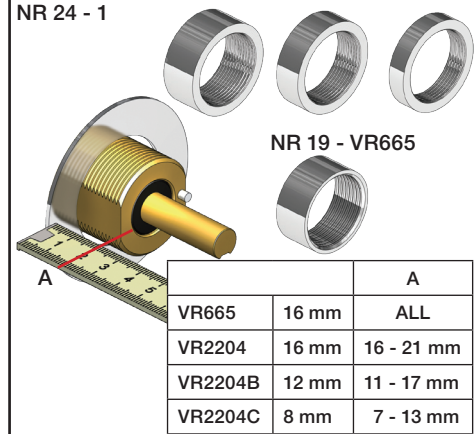


	A	
VR665	16 mm	ALL
VR2204	16 mm	16 - 21 mm
VR2204B	12 mm	11 - 17 mm
VR2204C	8 mm	7 - 13 mm


NR 28 - 3

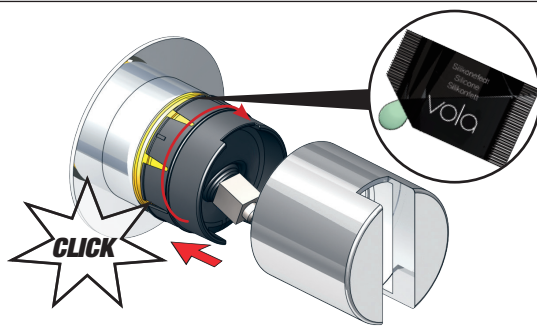


NR 28 - 4



NR 19 - 2 NR 24 - 2

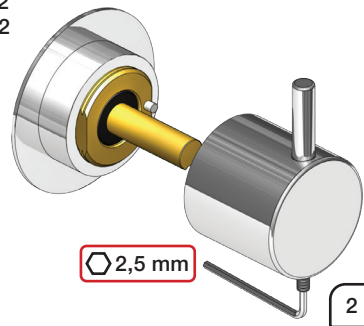

VOLA T34

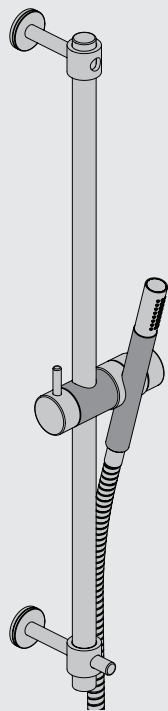


www.vola.com




vola

mnt_T34_V2_40998687




14-06-2022 5 705230 173658

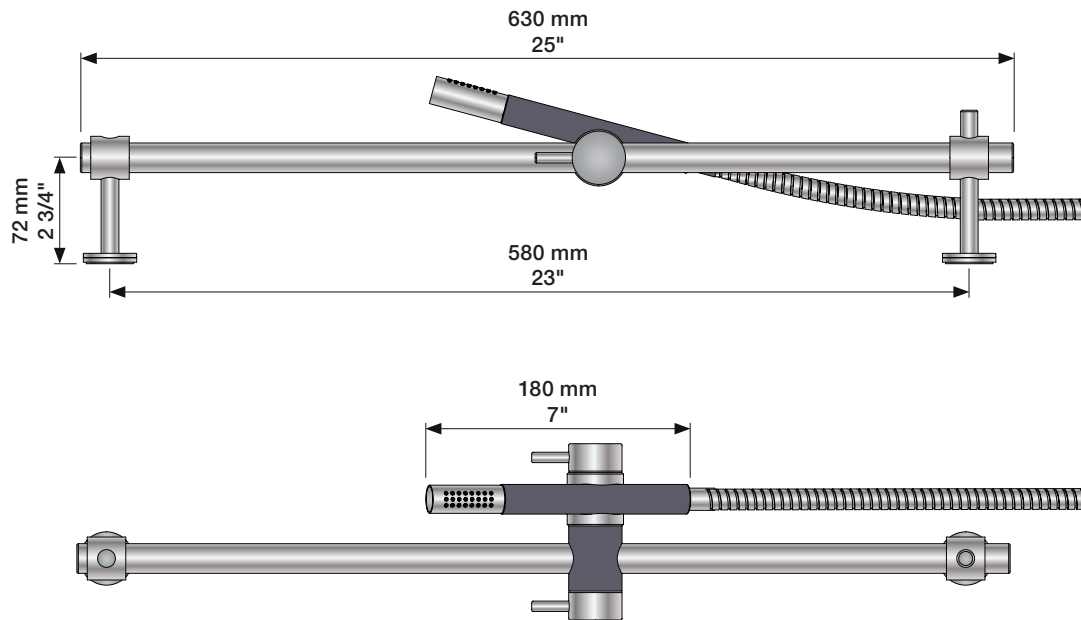

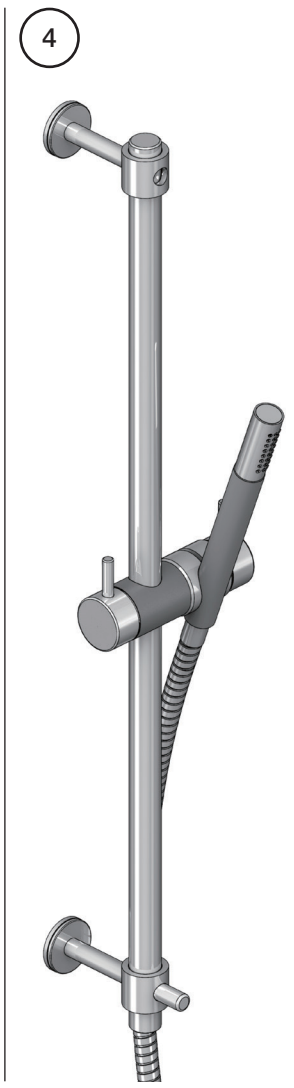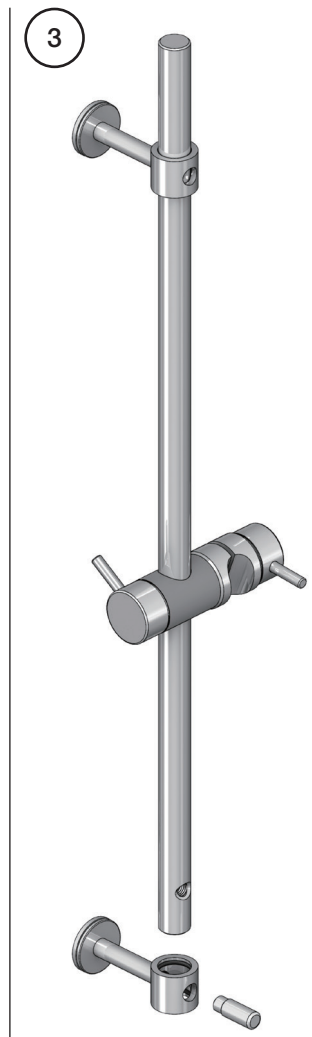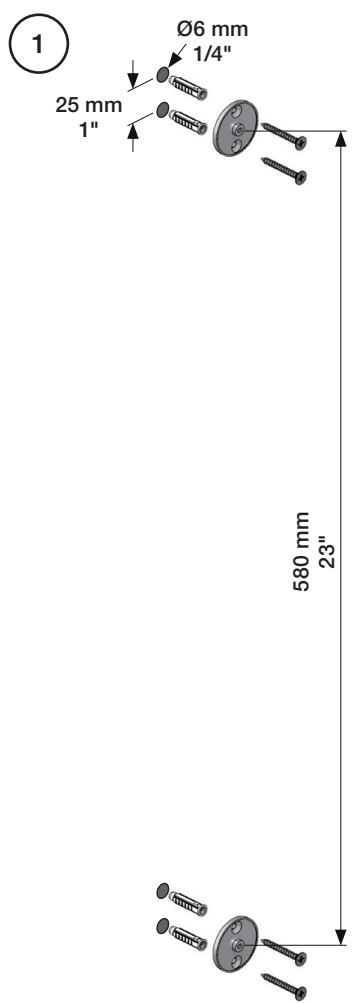


100

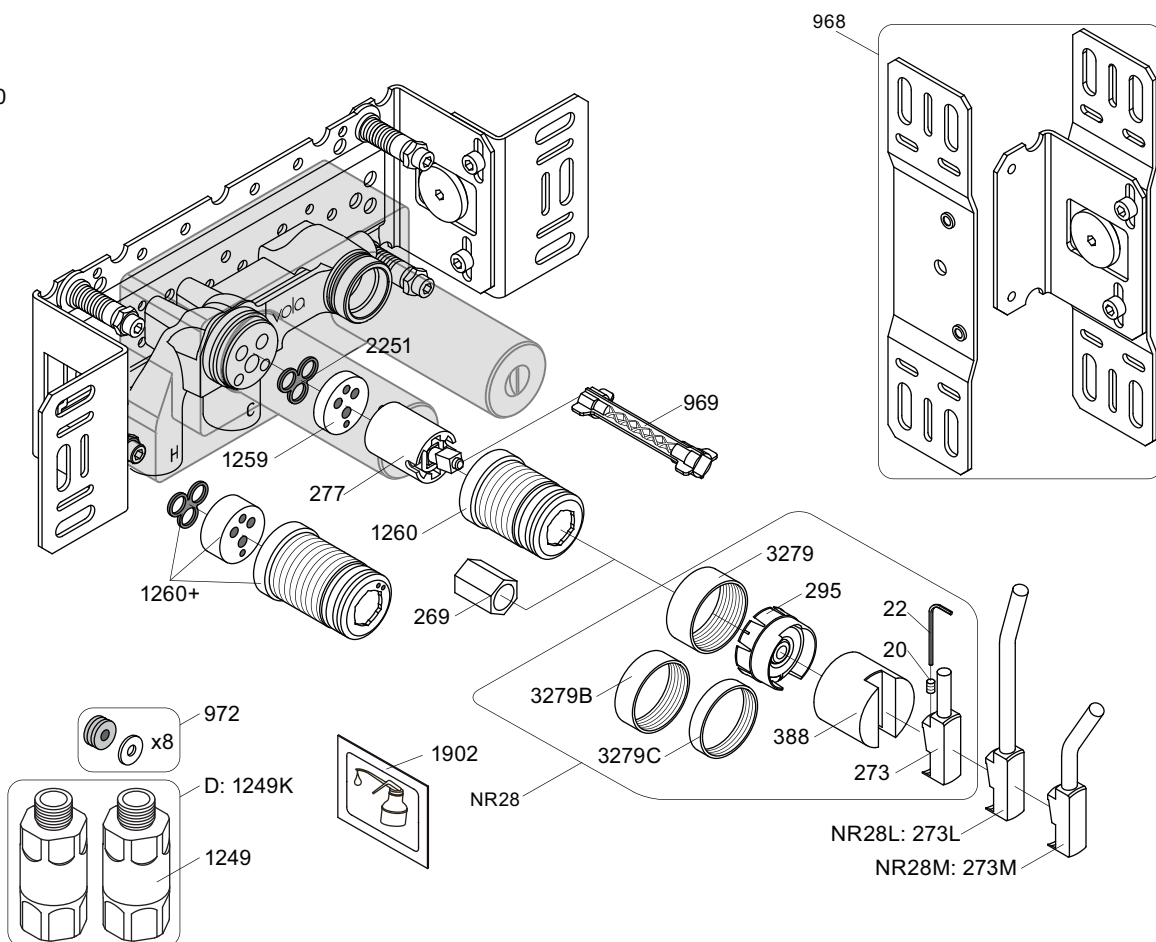


NR28: VR20, VR22, VR269, VR273, VR295, VR388, VR3279, VR3279B, VR3279C
 VR277K: VR22, VR269, VR277
 VR1260: VR1259, VR1260, VR2251


100





100X




200V




300



3002




3003K



3003


-



3002




3001, 001




3001, 001



3001



3001, 001






vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com

VOLA 100
 100X, 200V, 300


Date
 May. 22

Rev.
 7

Sheet
 SB 1.2

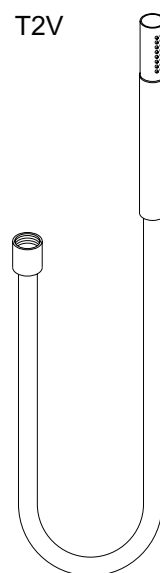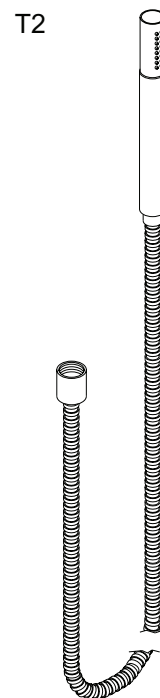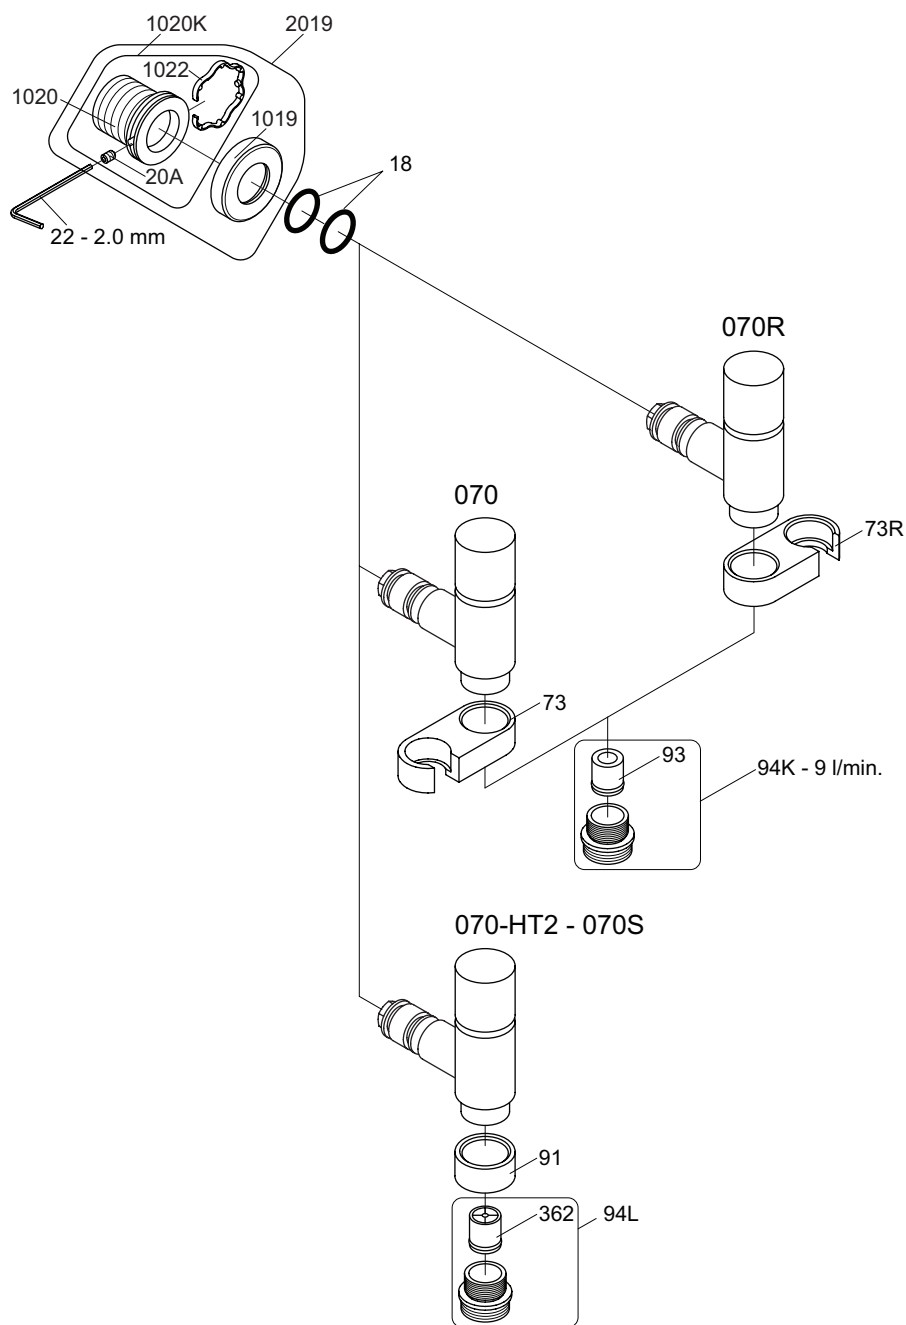

VR1020K: VR20A, VR22, VR1020, VR1022
 VR2019: VR20A, VR22, VR1019, VR1020, VR1022



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@vola.com
 www.vola.com


VOLA 070, 070R 070-HT2

Date
 Apr. 21


Rev.
 5

Sheet
 SB 16

T34

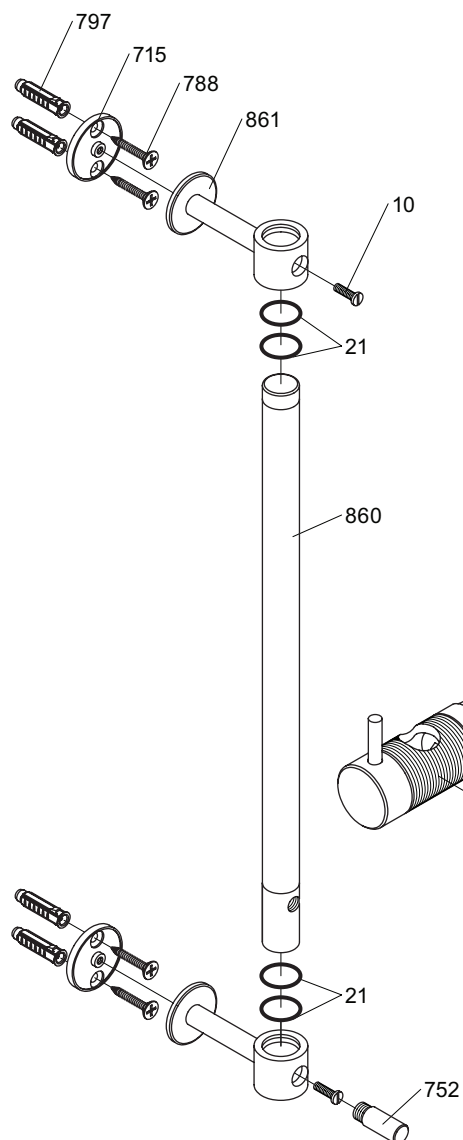

T2

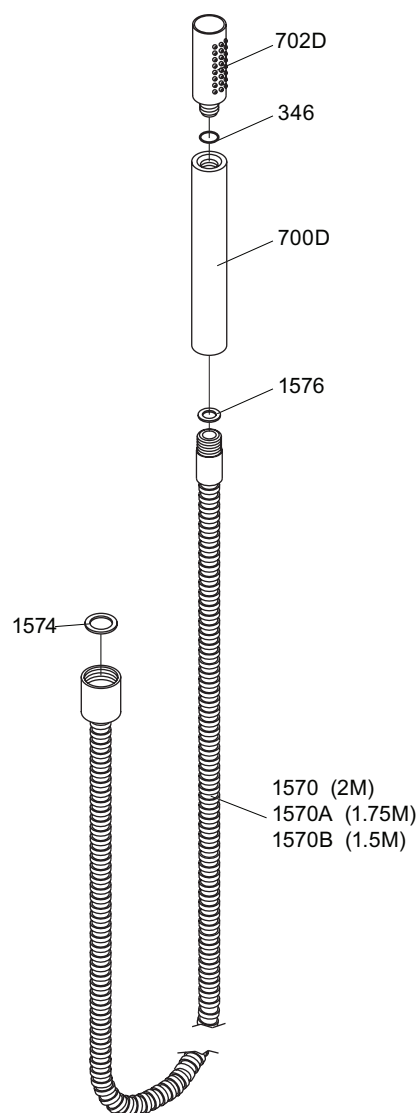

vola®

Lunavej 2
DK-8700 Horsens
Tlf : + 45 7023 5500
sales@vola.com
www.vola.com

VOLA T34

Date
Apr. 03

Rev.
4

Sheet
SB 42.25