

VOLA 600, 700, 700V, 900, 1500
VOLA 800, 800V, 800N, 800NV, 800T, 800TV
VOLA S20V, S40V

Monteringsvägledning

NB.
Boxen leveraras inte av Vola.
utan köps genom ÅF eller Grossist.



www.vola.com

SE_600-1500_40998366_V2

vola



5 705230 357904

Max.: 10 Bar/145 psi


Max. 65°C, 150°F

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:



Data, 3 Bar/43.5 Psi:

Max:	l/min.	Gal/min.
600:	65	17.2
700V:	65	17.2
800V:	34	9.0
900:	30	8.0
1500:	65	17.2

Installasjonsexempel: 1500:

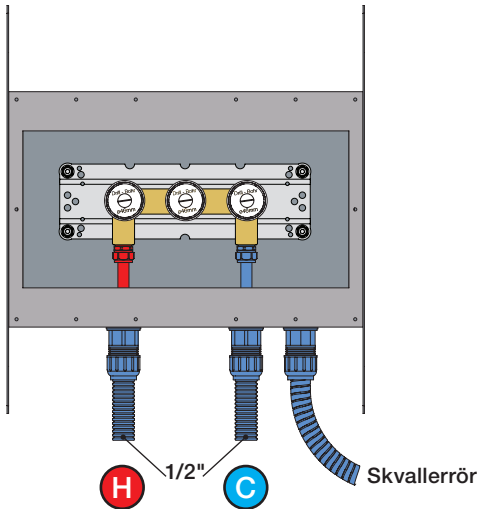

Förlängning

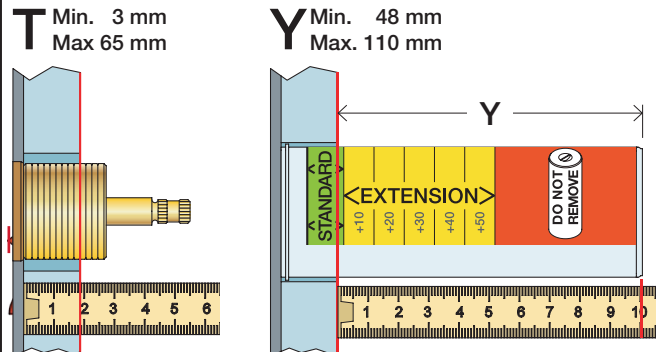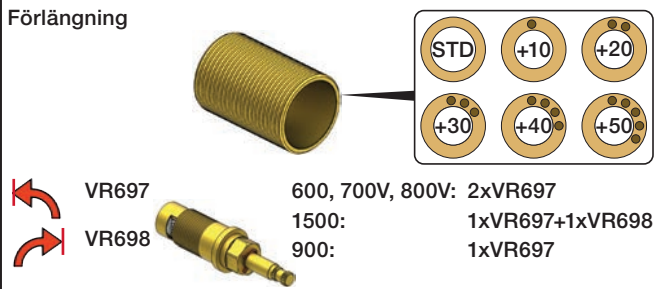


	T	Y	VR697/VR1400/VR2019
	5 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50

Förlängning, eftermontering




* +10 - STANDARD SVERIGE

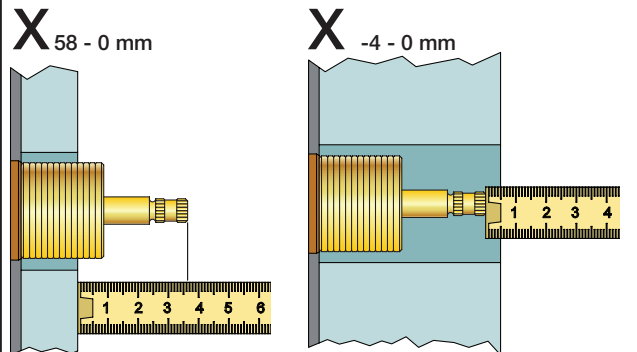


	X	VR697/VR1400/VR2019
	46 - 58 mm	Std.
	36 - 50 mm	+10
	26 - 40 mm	+20
	16 - 30 mm	+30
	6 - 20 mm	+40
	-4 - 10 mm	+50

Montering av förlängning


VR697+

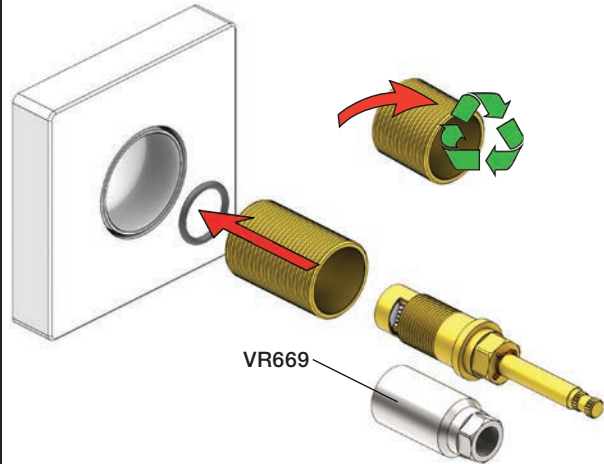


VR2019+, VR2119+

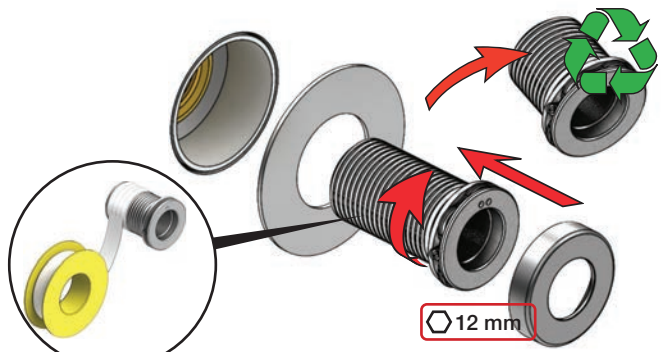








VR1400+

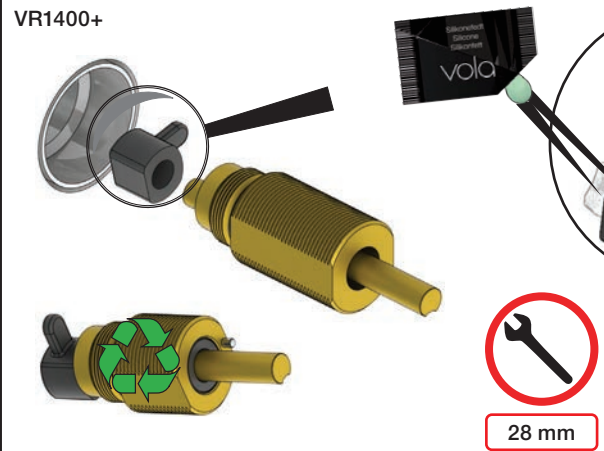

800







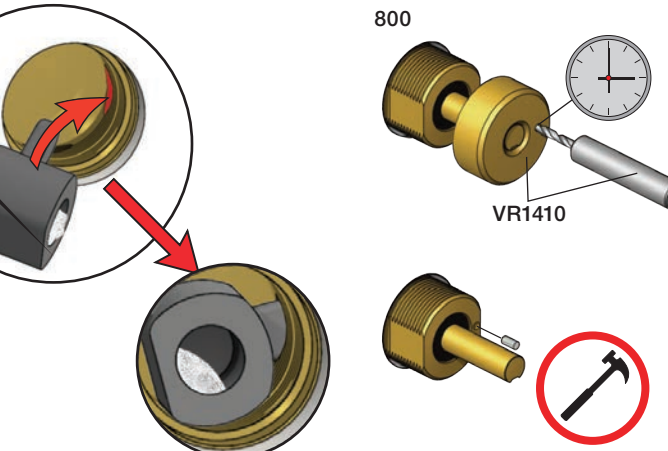


	L	L1	H
A	318 mm 12 1/2"		
B			
C			
D	220 mm 8 1/2"	78 mm 3 1/16"	95 mm 3 3/4"
E			
F	396 mm 15 1/2"		
G	120 mm 4 3/4"	-	

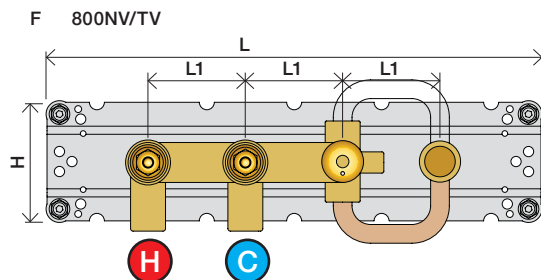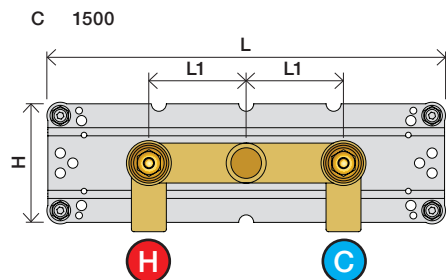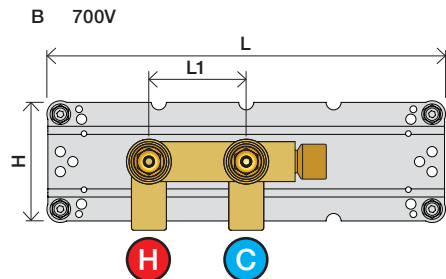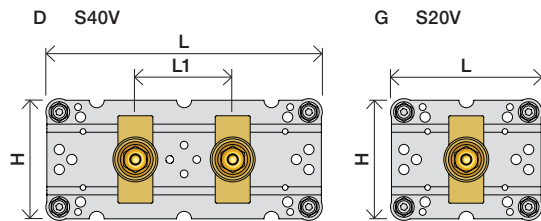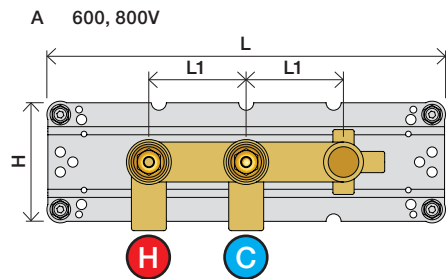

1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÅF eller Grossist.

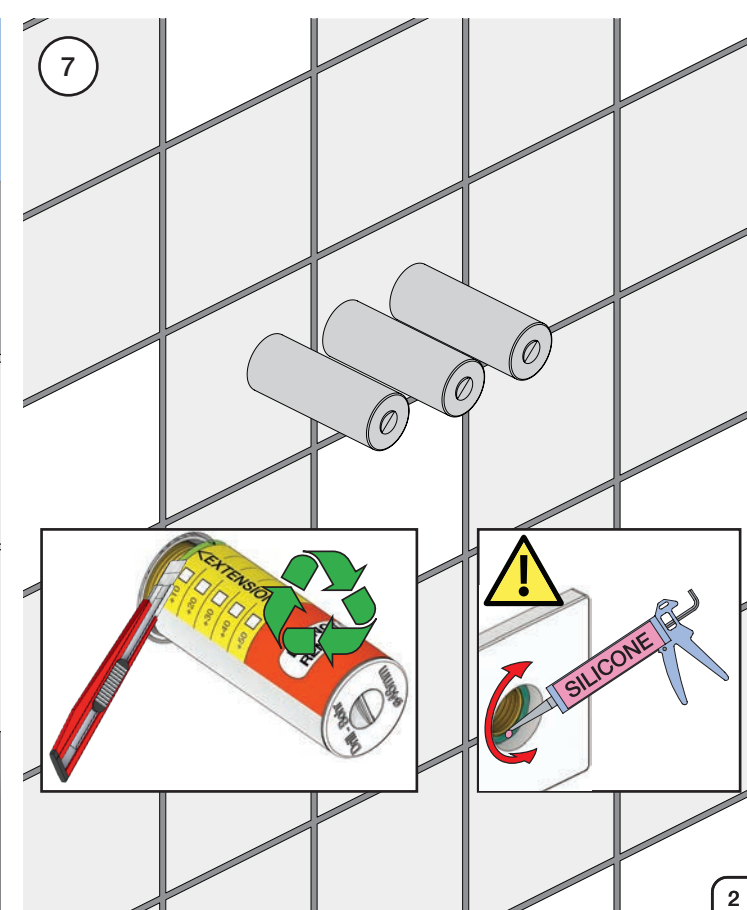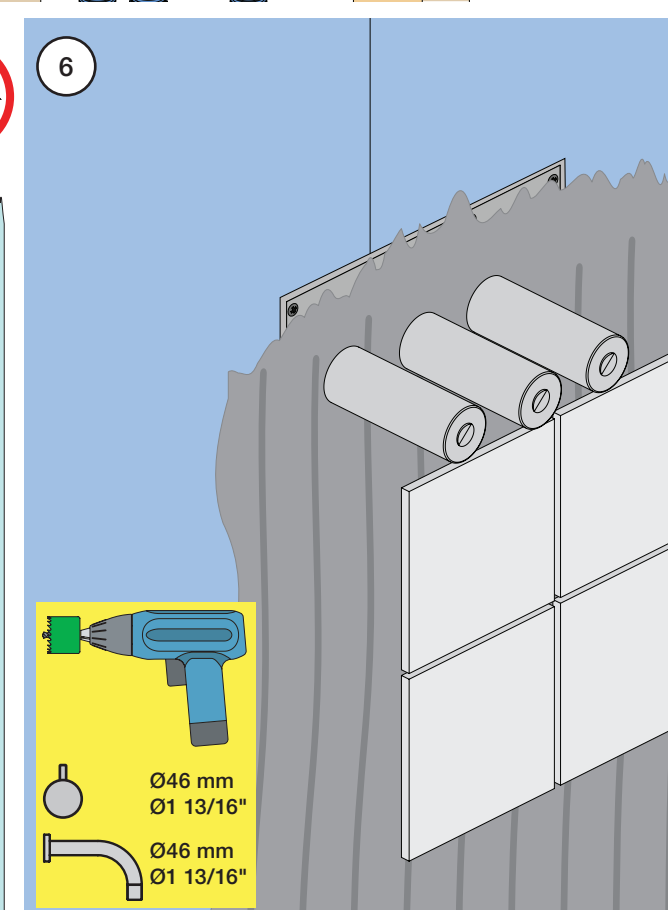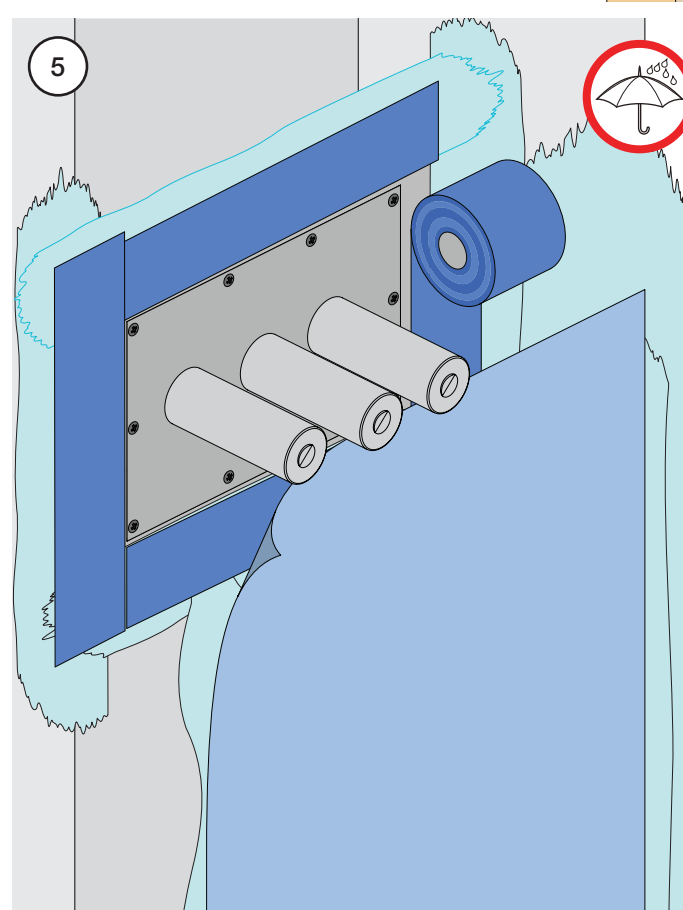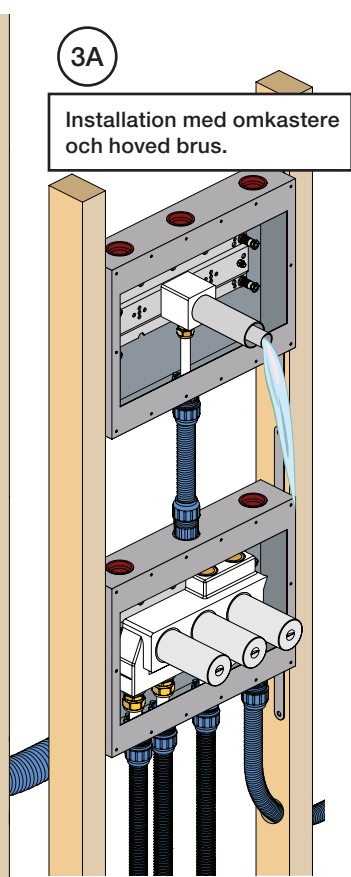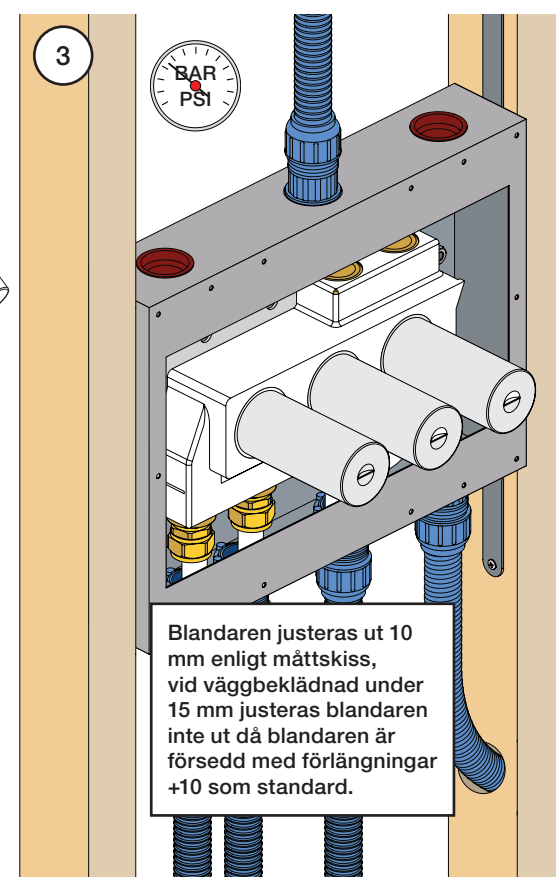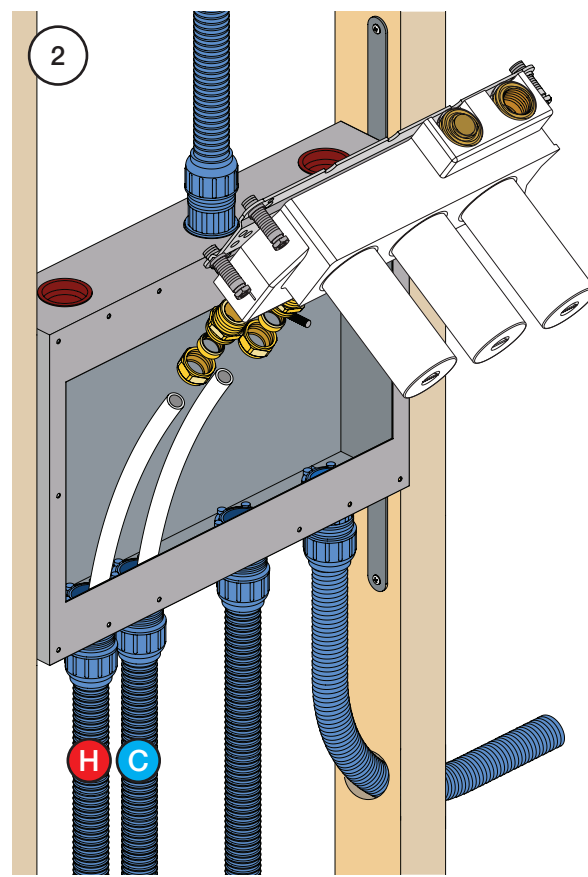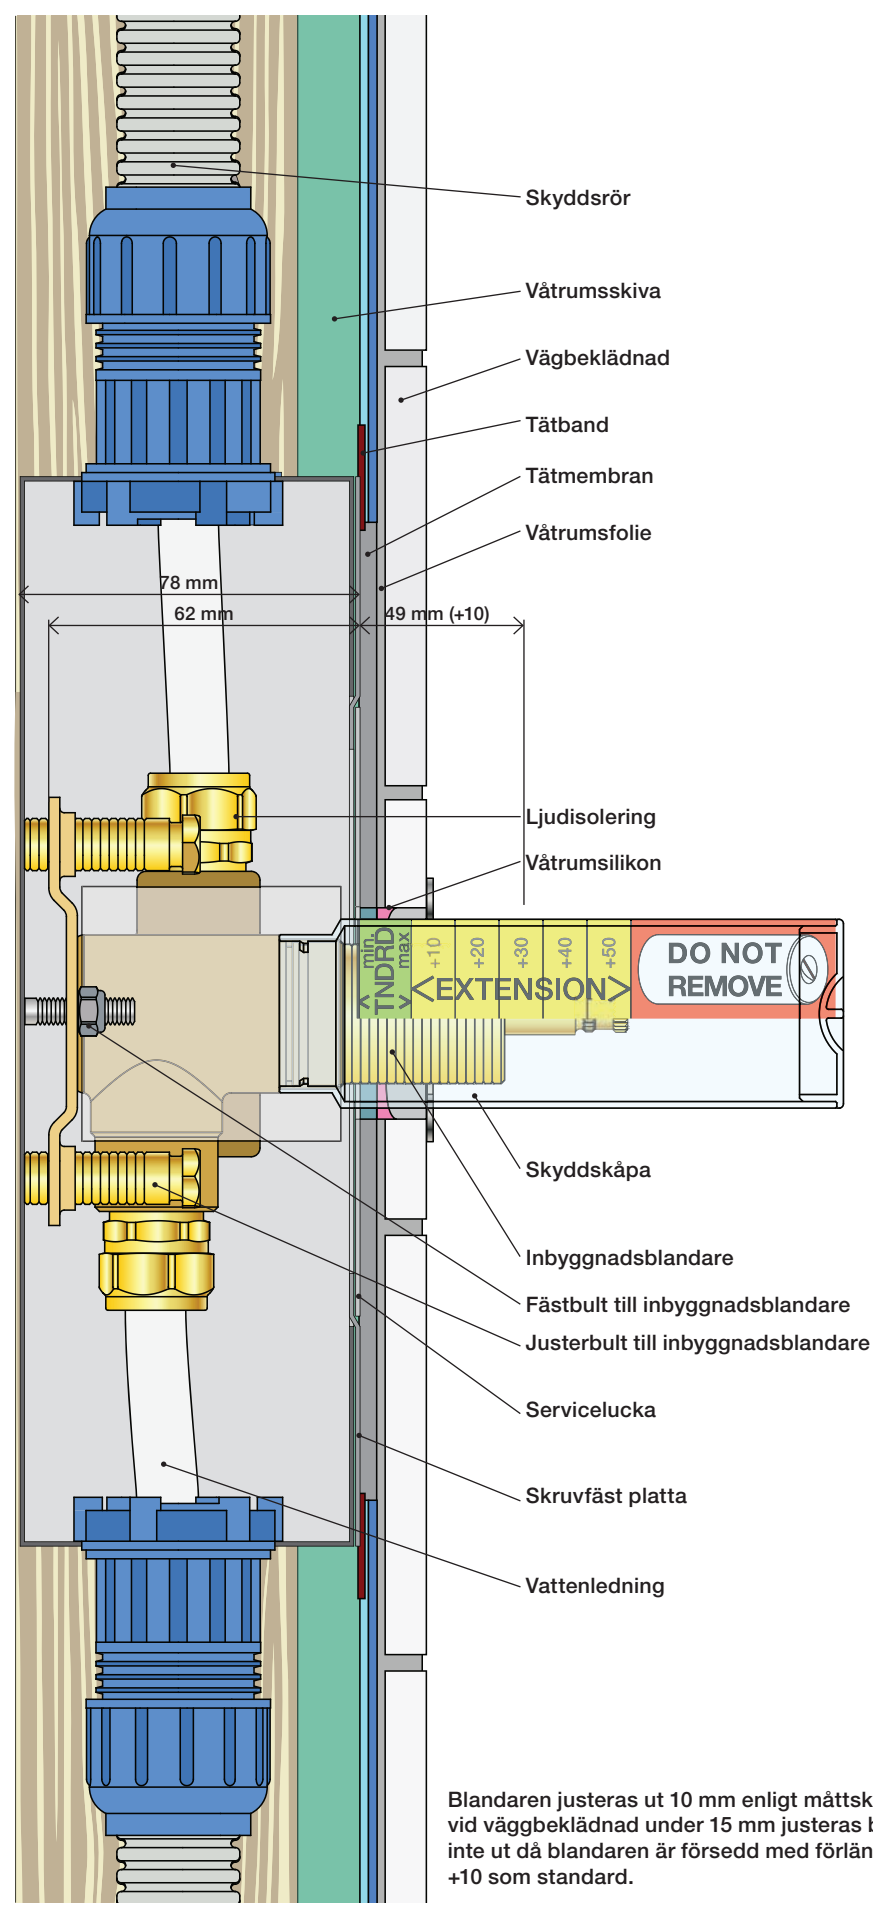

Blandaren justeras ut 10 mm enligt måttskiss,
vid vägbeklädnad under 15 mm justeras blandaren
inte ut då blandaren är försedd med förlängningar
+10 som standard.

Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage



T60:



T68:



T65:



1

T60

28 mm
1 1/8"

55 mm
2 1/8"

Ø17 mm
Ø11/16"

290 mm
11 3/8"

1500 mm
5'

G1/2"

28 mm
1 1/8"

Ø60 mm
Ø2 3/8"

Data	Bar:	1	2	3	4	5
T60	(l/min) (Gal/min)	6.9 1.8	9.8 2.6	12 3.2	14 3.7	15 4.1
	Max. 65°C. 150°F					

Service - VR556

USA: Max. flow rate:
1.6 Gal/min
6.0 l/min.

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

Bathtub
Badewanne

Badekar
Badkar

Badkuip
Baignoire

2

T68

Ø43 mm
Ø1 3/4"

40 mm
1 5/8"

Ø6 mm
1/4"

25 mm
1"

001G

Min. 200 mm
Min. 8"

Min. 350 mm
Min. 14"

40 mm
1 5/8"

070

T68

790 mm
31"

690 mm
27 1/8"

590 mm
23 1/4"

490 mm
19 1/4"

900 mm
35 3/8"

800 mm
31 1/2"

700 mm
27 1/2"

600 mm
23 5/8"

1

T8 → T68

3

T65

50 mm
2"

55 mm
2 1/8"

Ø60 mm
Ø2 3/8"

50 mm
2"

790 mm
31"

690 mm
27 1/8"

590 mm
23 1/4"

490 mm
19 1/4"

900 mm
35 3/8"



800 mm
31 1/2"

700 mm
27 1/2"



600 mm
23 5/8"

1

4

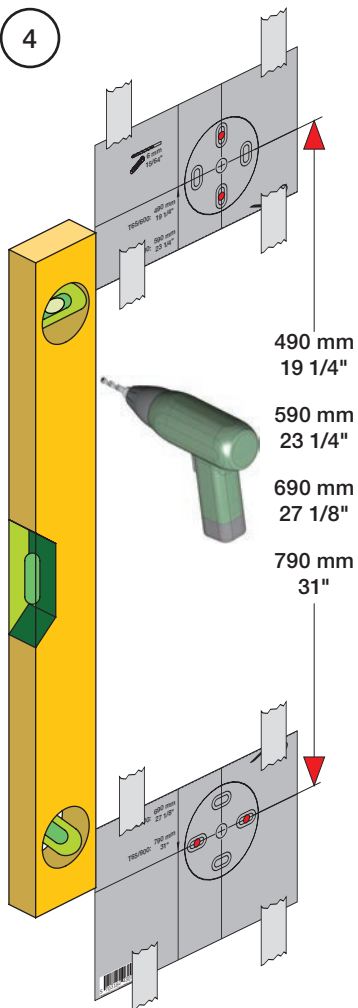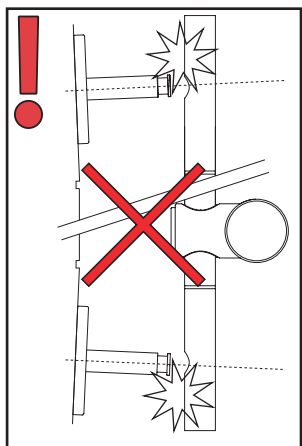490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"


5

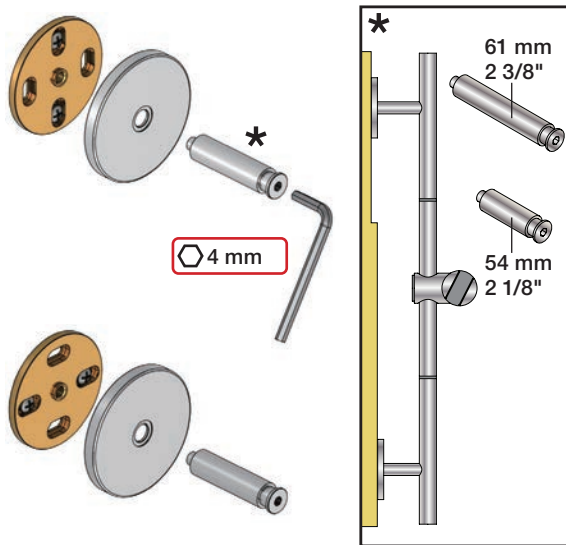Ø6 mm
Ø15/64"24 - 42 mm
1" - 1 3/4"Ø54 mm
Ø2 1/8"



4 mm

61 mm
2 3/8"54 mm
2 1/8"

6

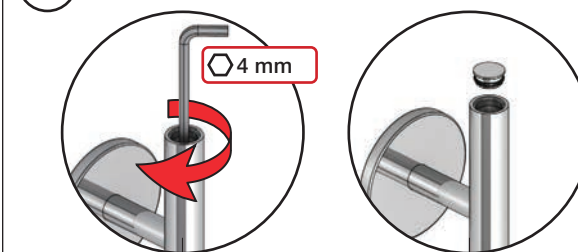

4 mm

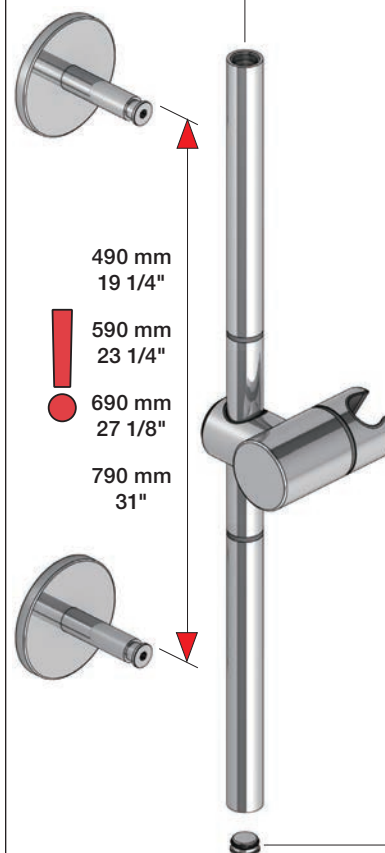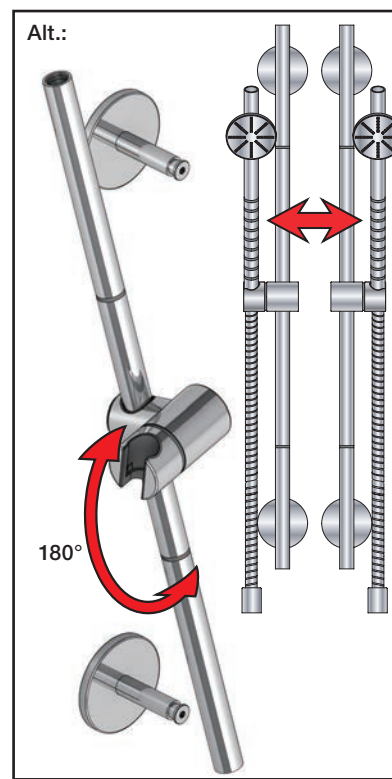490 mm
19 1/4"590 mm
23 1/4"690 mm
27 1/8"790 mm
31"

Alt.:

180°

7



8

2 mm




Do not cut the membrane
Die Membran nicht schneiden
Skær ikke membranen
Skär inte membranet
Snij het membraan niet door
Ne coupez pas la membrane
No cortar la membrana

NR.17:

1

NR.19:

2



NR 17



NR 17 - 1



NR 17 - 2



2 mm

1

NR 19




NR 19 - 1



NR 19 - 2



600

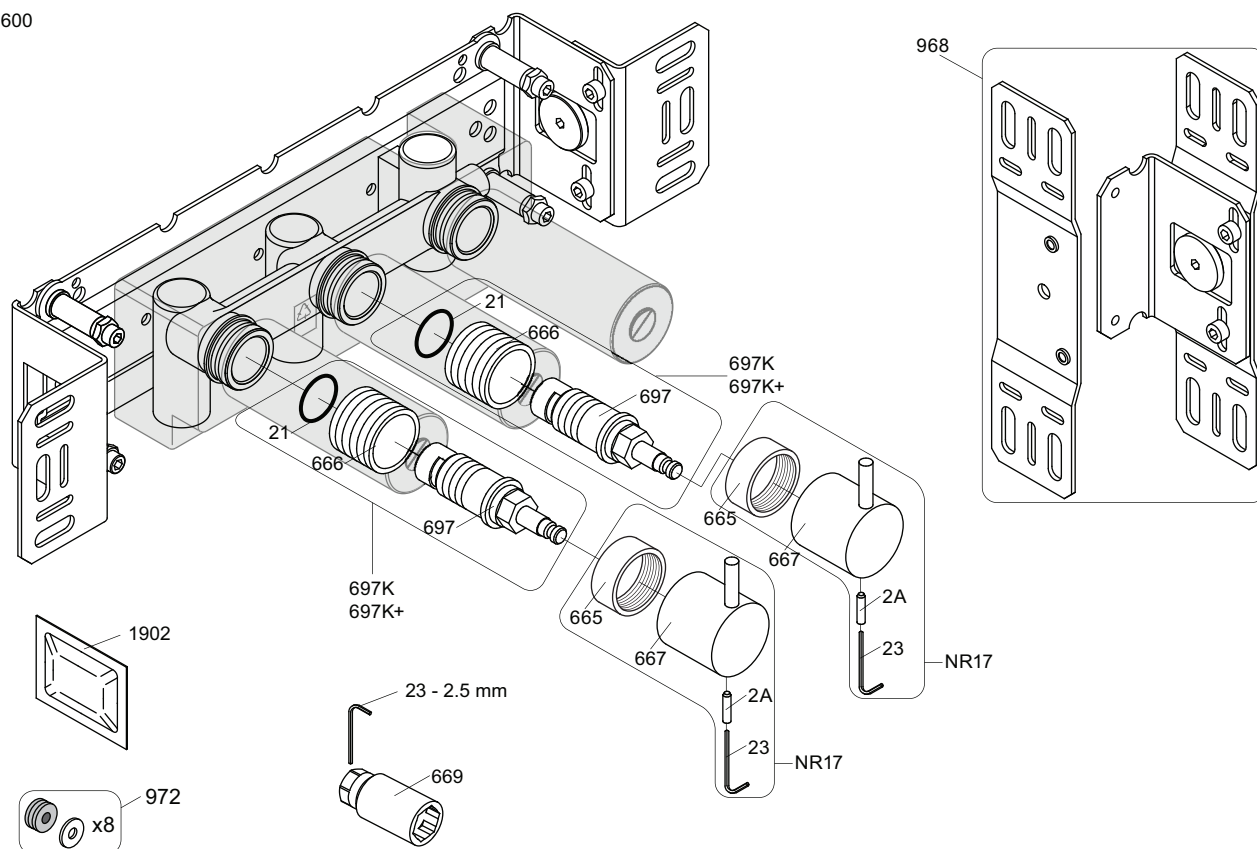


NR17: VR2A, VR23, VR665, VR667
 VR697K: VR21, VR23, VR666, VR669, VR697



900




700V

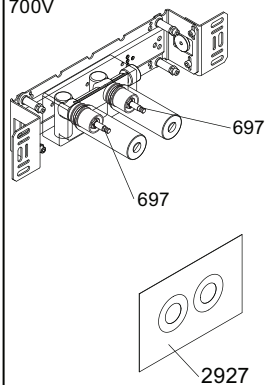


600

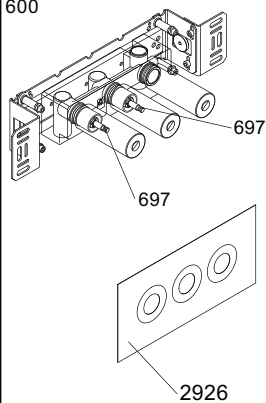

002



1034



003K




001, 001G



2x001G



001, 2x001G



voila
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 sales@voila.com
 www.voila.com

VOLA 600
 700V, 900, 1500

Date
 May. 22

Rev.
 4

Sheet
 SB 5.3

