


VOLA 5100, 5100X, 5200V, 5300
VOLA 5400DV, 5400V, 5400NV, 5400TV & A3/A4
VOLA 5400FV, 5400RV, 5600V & A3/A4
VOLA 5400RVX, 5400TVX & A3/A4

Monteringsvägledning

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÅF eller Grossist.

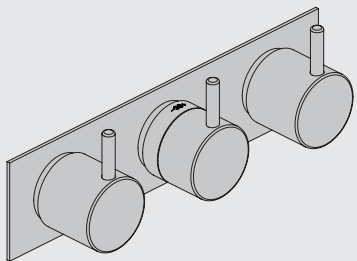

www.vola.com

SE_5000_V2 40998365
14-01-2022



vola

Max.: 10 Bar/145 psi

Max. 65°C, 150°F

5100/5200V/5300:



5400/5600A3:



- C

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

5400/5600:




5400/5600A4:



- D


5400 5600	5400A3 5600A3	5400A4 5600A4							
Out 2	Out 1	Out 1	32/(8.5)	16/(4.2)	-	-	-	-	-
Out 3	Out 2	Out 2	-	-	32/(8.5)	16/(4.2)	-	-	-
-	Out 3	Out 3	-	-	-	-	32/(8.5)	16/(4.2)	-
-	-	Out 4	-	-	-	-	-	-	32/(8.5)

Installations exempel: 5400NV

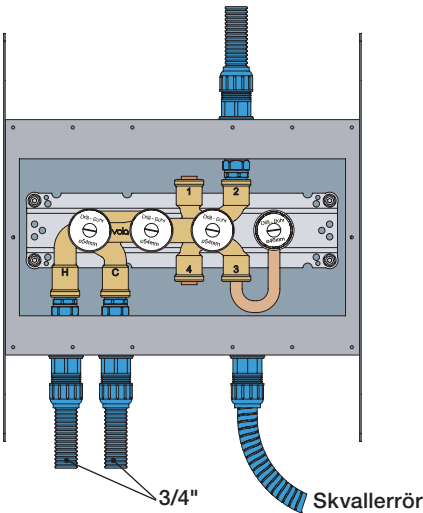


mm/Inch	L	L1	L2	L3	L4	H	H1	H2	H3
A	220 8 1/2"	-	-						
B	318 12 1/2"			60 2 3/8"		95 3 3/4"		130 5 1/8"	
C	396 15 1/2"	64 2 1/2"	78 3 1/16"		78 3 1/16"		127 5"		54 2 1/8"
D	474 18 1/2"				156 6 1/8"				


A: 5400DV/A3/A4




B: 5200V

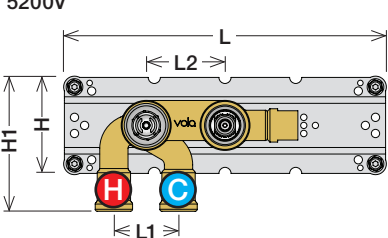


C: 5100X

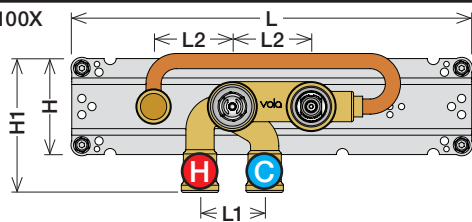


B: 5400V/A3/A4

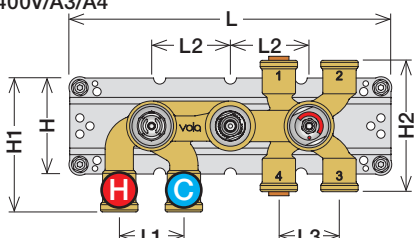


C: 5400TVX/A3/A4 - D: 5400RVX/A3/A4

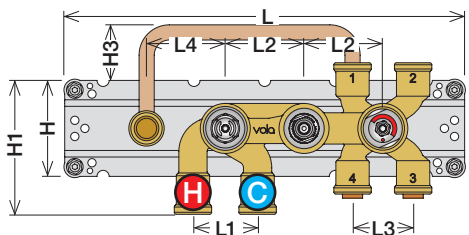


C: 5400TV/A3
D: 5400RV/A3

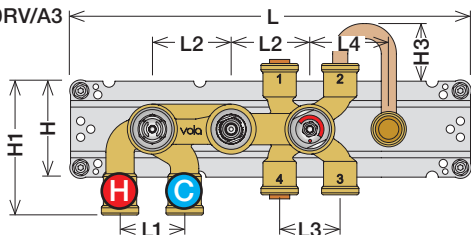


C: 5400NV/A3
D: 5400FV/A3

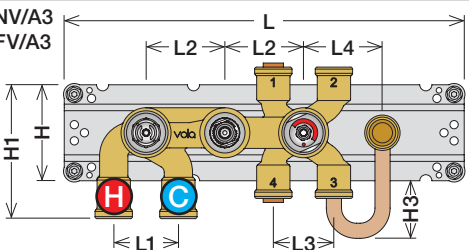


C: 5400NVA4
D: 5400FVA4

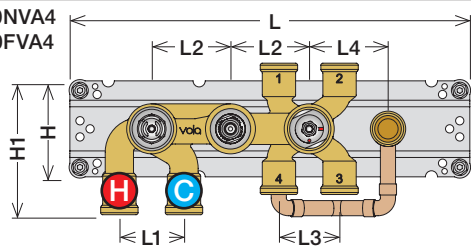


C: 5300

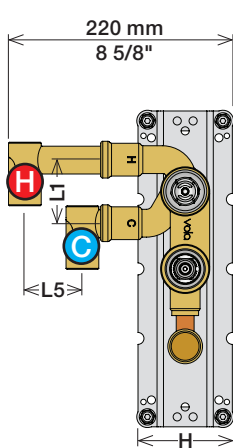

C: 5600V/A3/A4

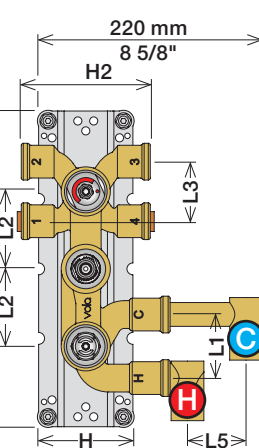


Förlängning

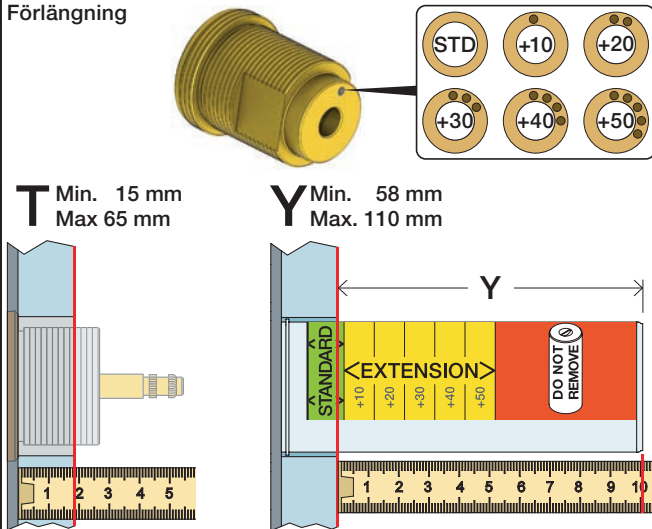

	T	Y	VR5250/VR5410/VR2019
	3 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50


Förlängning, eftermontering

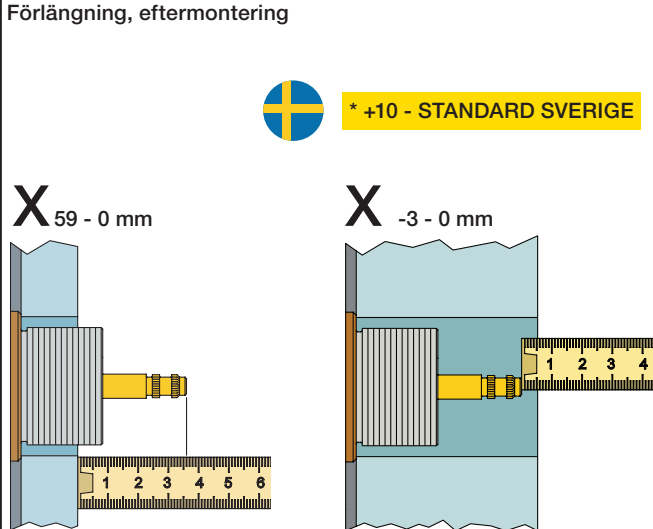


	X	VR5250/VR5410/VR2019
	47 - 59 mm	Std.
	37 - 47 mm	+10
	27 - 37 mm	+20
	17 - 27 mm	+30
	7 - 17 mm	+40
	-3 - 7 mm	+50

Montering av förlängning



VR5250

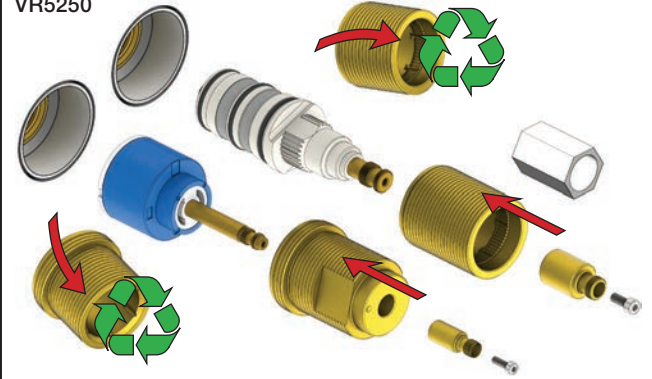

VR2019+, VR2119+







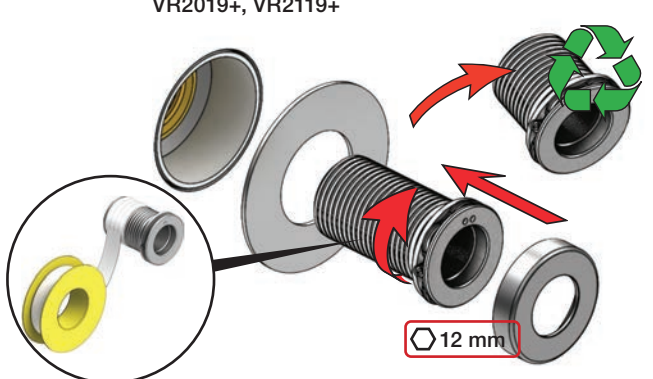


VR5410 IKKE 5100, 5100X, 5200V, 5300

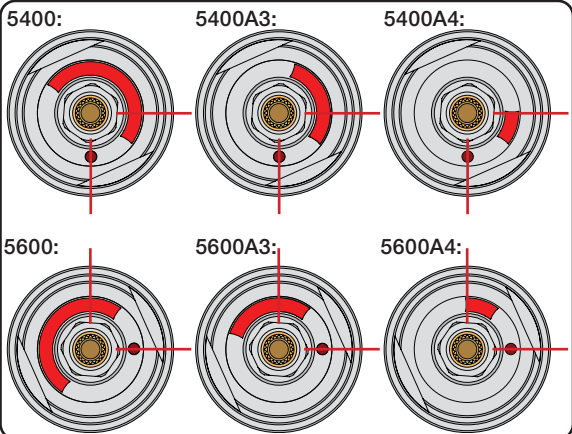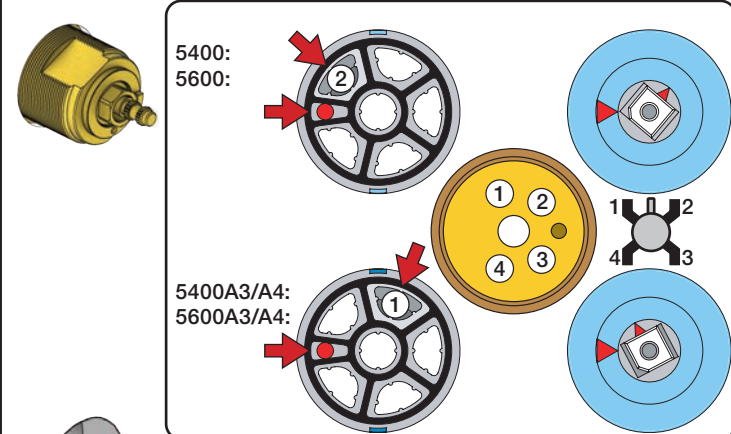

1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.

NB.
Boxen leveraras inte av VOLA.
Utan köps genom ÅF eller Grossist.

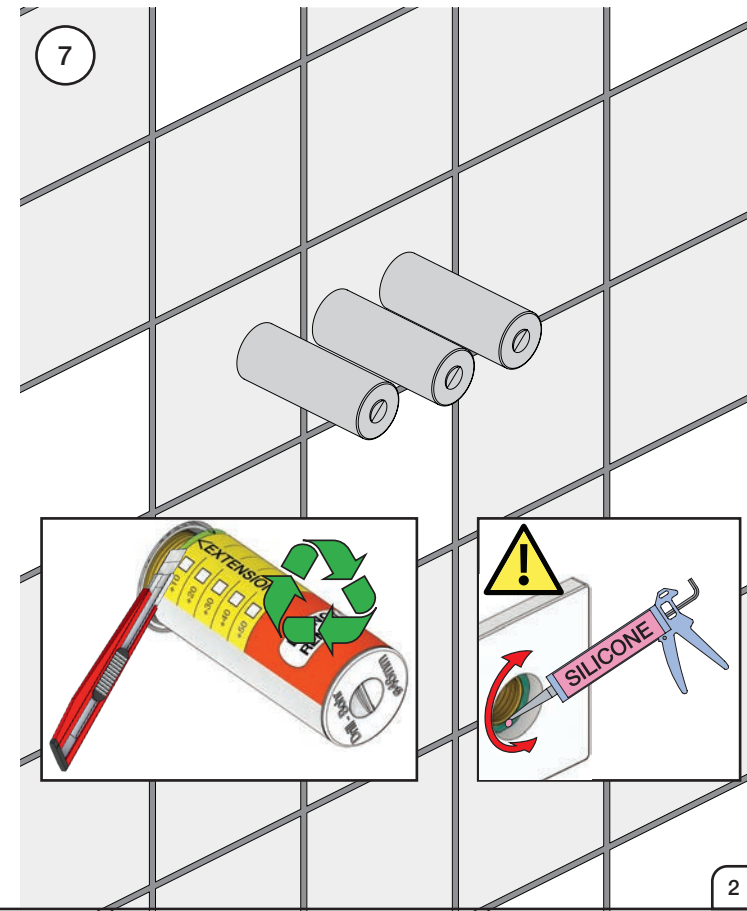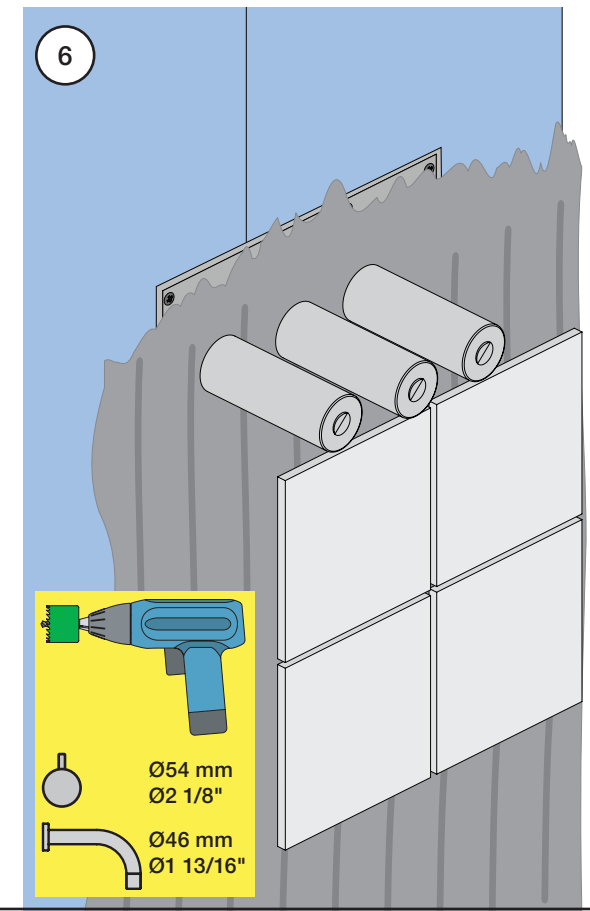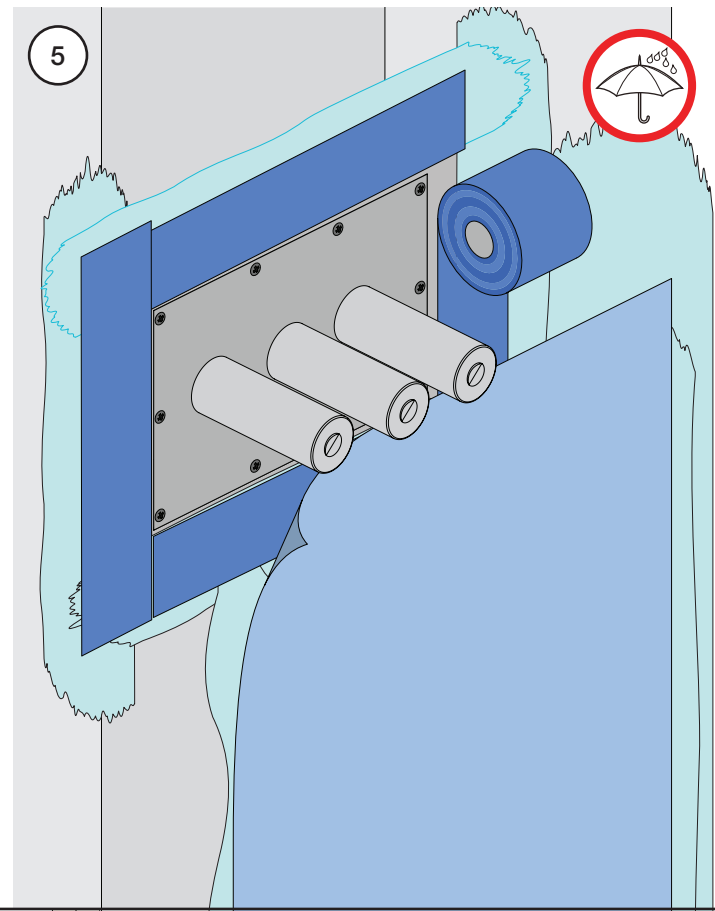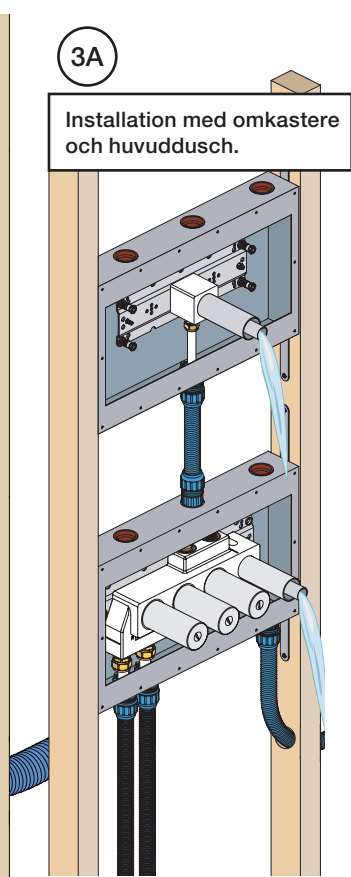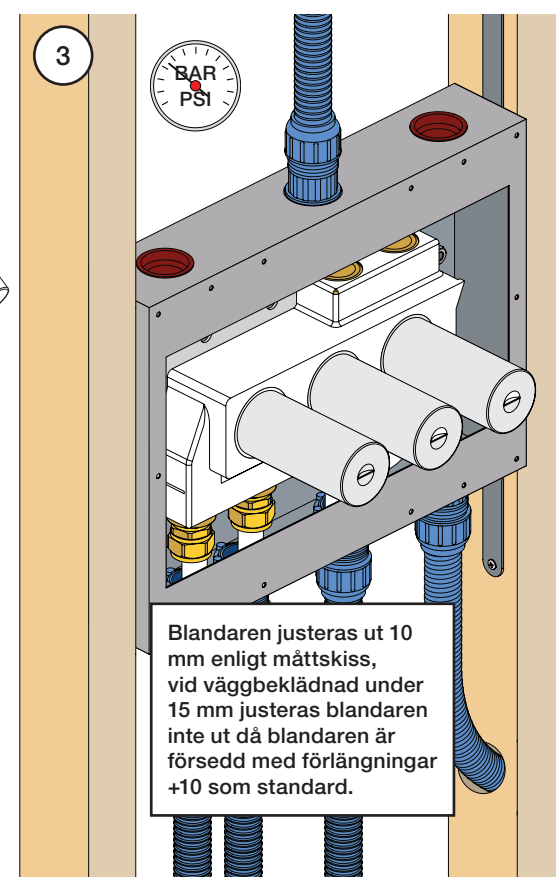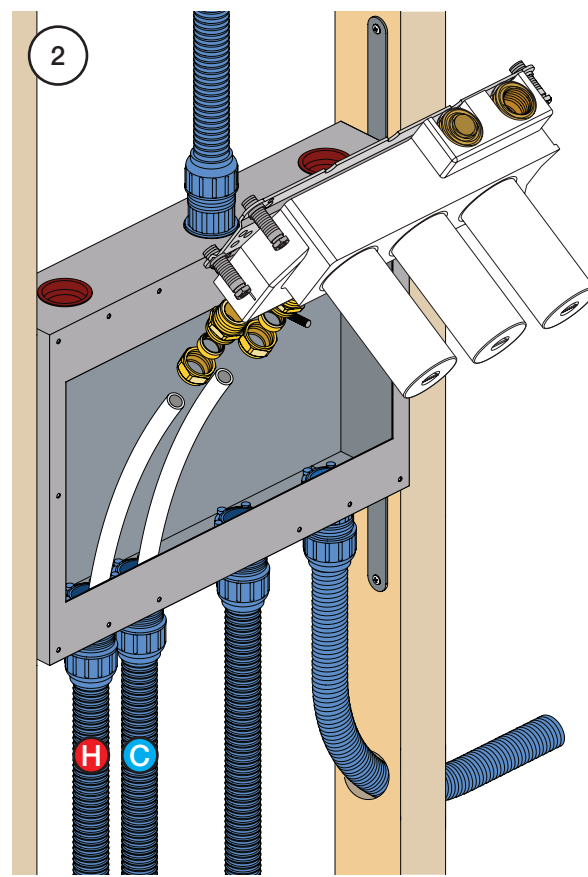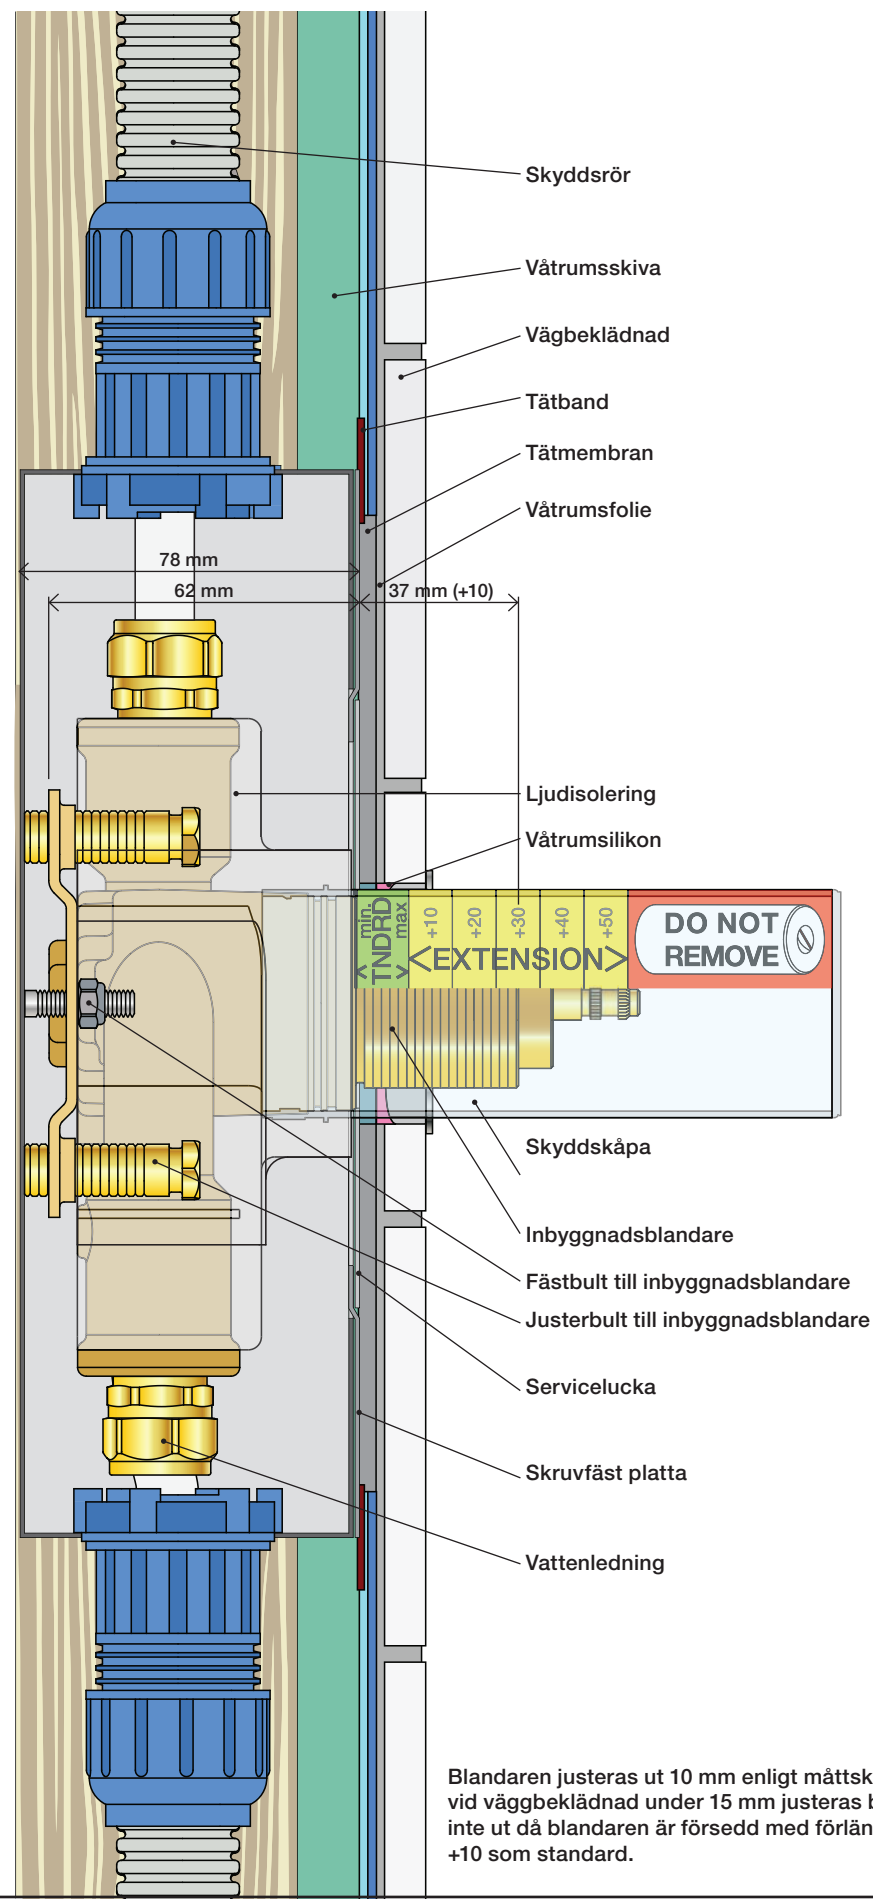

Blandaren justeras ut 10 mm enligt måttskiss,
vid väggbeklädnad under 15 mm justeras blandaren
inte ut då blandaren är försedd med förlängningar
+10 som standard.

5400VA4

5250+	5410+	5268+	1902	2A* Color
5249+	5271+	5270+	2C	VR2A-Steel: Standard
5258+	2C	5271+	2C	VR2A-F60: F17-F27-F60
5248+	5270+	5271+	2C	VR2A-F63: F63-F64
5257+	5270+	5271+	2C	VR2A-F65: F19-F65-F70
5259+	5270+	5271+	2C	

NR51:	VR5251, VR2279+B+C, VR2A
NR52:	VR2A, VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
NR64:	VR5251, VR2279+B+C, VR2A
VR3113:	VR3109, VR3110, VR5255
VR5250+:	VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+:	VR5257+, VR5259+
VR5258+:	VR5258+, VR5260+
VR5268+:	2xVR2C, VR1902, VR5268, VR5271+
VR5410+:	2xVR2C, VR5270+, VR5271+

5400VA4 5600VA4	5400NVA4 5400TVA4	5400FVA4 5400RVA4	5400DVA4
2929	2930	2961	2934

5003B	5004B	5004L	
3x2001	3x2001, 001	3x2001, 001	2001

vola Lunavej 2 DK-8700 Horsens Tlf : + 45 7023 5500 sales@vola.com www.vola.com	VOLA 5400VA4 5400FVA4, 5400NVA4 5400RVA4, 5400TVA4 5600VA4	Date Apr. 21
		Rev. 6
		Sheet SB 10.54