


VOLA S21V, S42V, 2600, 2700V, 2800V, 2900

Monteringsvägledning

NB.
Boxen leveraras inte av Vola.
utan köps genom ÅF eller Grossist.

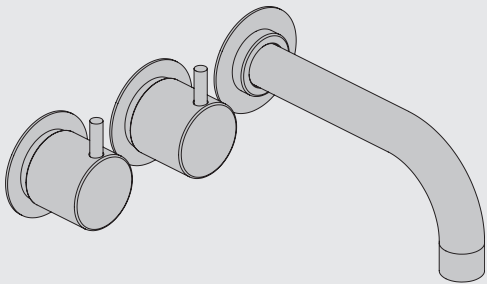

www.vola.com

SE_2600_V2_40998368
20-01-2022



vola

Data, 3 Bar/43.5 Psi:


Max:	l/min.	Gal/min.
S21V:	50	13.2
S42V:	77	20.3
2600:	50	13.2
2700V:	77	20.3
2800V:	50	13.2
2900:	50	13.2




Max. 65°C, 150°F

Max.: 10 Bar/145 psi

Installasjonsexempel: 2800


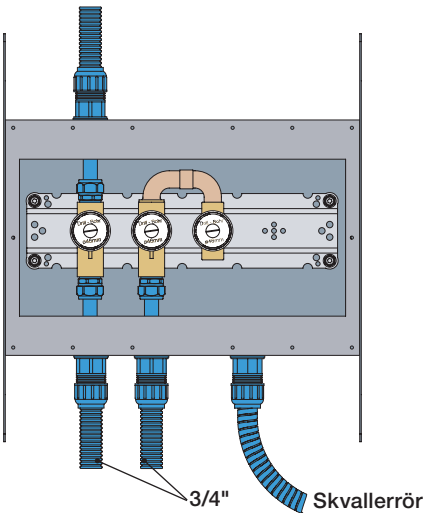


Förlängning

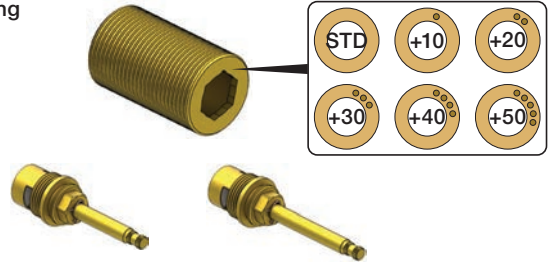

T Min. 15 mm
Max 65 mm


Y Min. 48 mm
Max. 110 mm

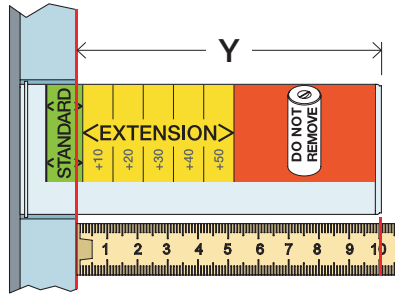

X 62 - 0 mm



* +10 - STANDARD SVERIGE




	T	Y	VR699/VR2019
	5 - 15 mm	110 - 98 mm	Std.
	15 - 25 mm	98 - 88 mm	+10 STANDARD SVERIGE
	25 - 35 mm	88 - 78 mm	+20
	35 - 45 mm	78 - 68 mm	+30
	45 - 55 mm	68 - 58 mm	+40
	55 - 65 mm	58 - 48 mm	+50


	X	VR699/VR2019
	50 - 62 mm	Std.
	40 - 50 mm	+10
	30 - 40 mm	+20
	20 - 30 mm	+30
	10 - 20 mm	+40
	0 - 10 mm	+50

Montering av förlängning







VR697+

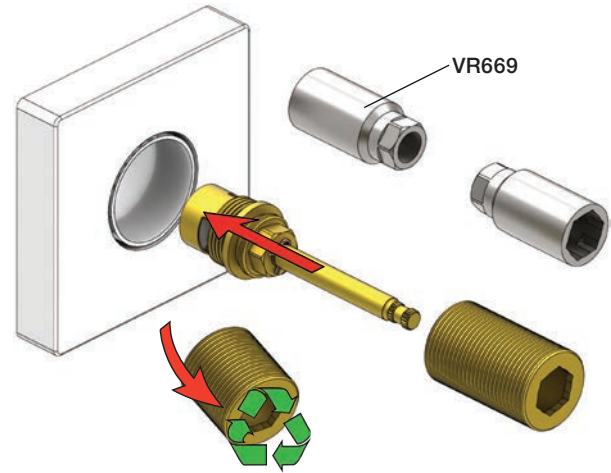

VR2019+, VR2119+





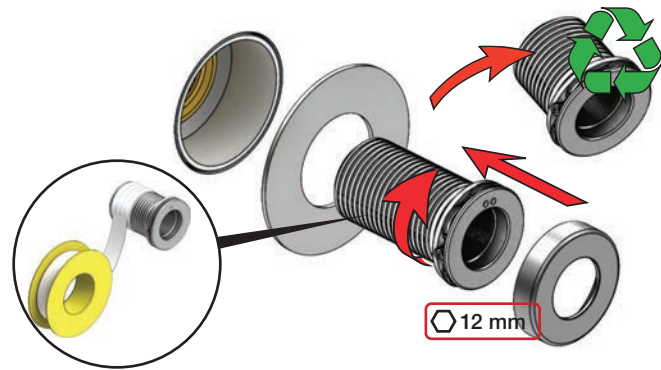


	L	L1	L2	H
A	318 mm 12 1/2"	78 mm 3 1/16"	-	95 mm 3 3/4"
B	220 mm 8 1/2"		340 mm 13 3/8"	
C	396 mm 15 1/2"			
D	220 mm 8 1/2"			
E	120 mm 4 3/4"			

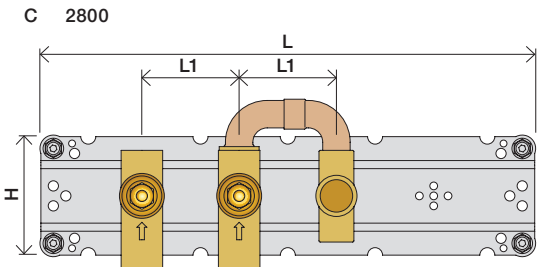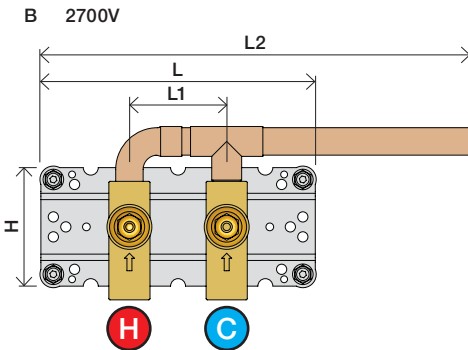
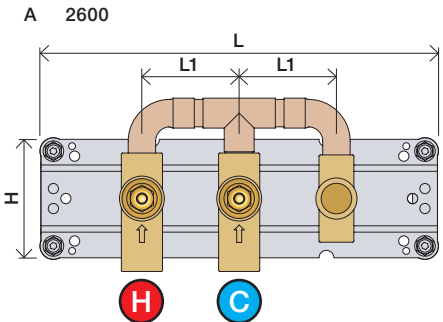


1 Demontera sidofixturerna.
Ta inte bort ljudisolering och Skyddskåpor.


NB.
Boxen levereras inte av VOLA.
Utan köps genom ÅF eller Grossist.

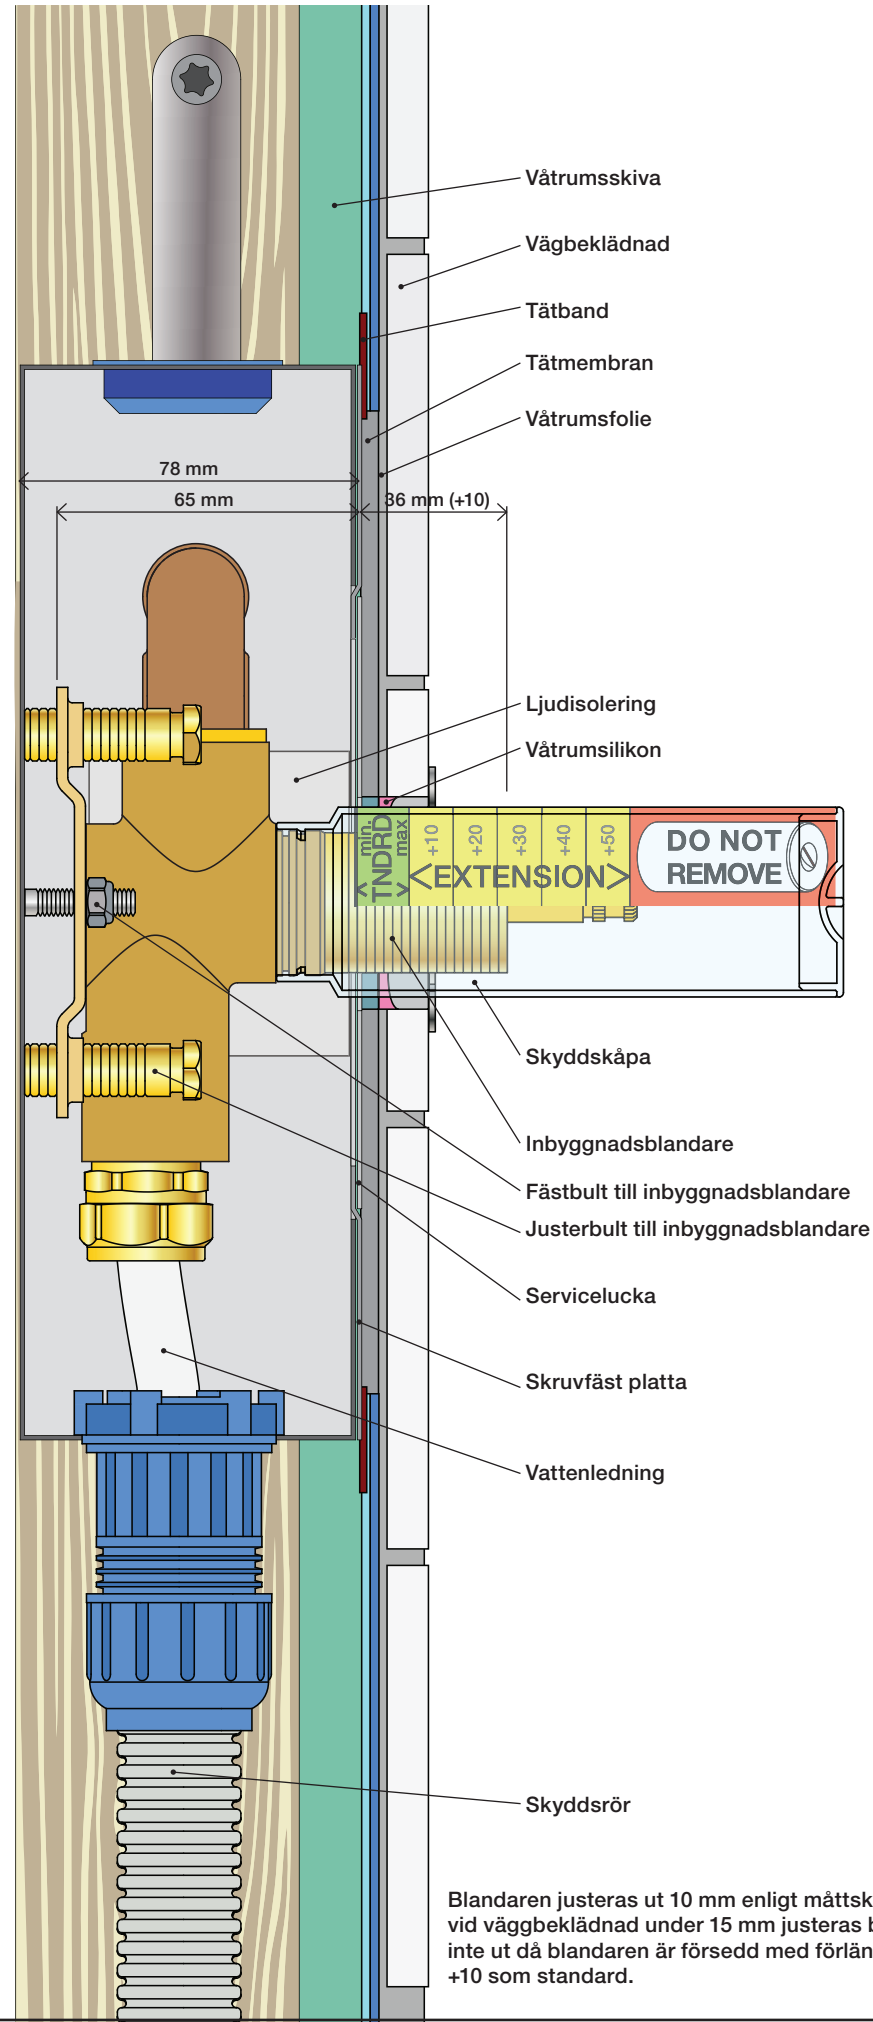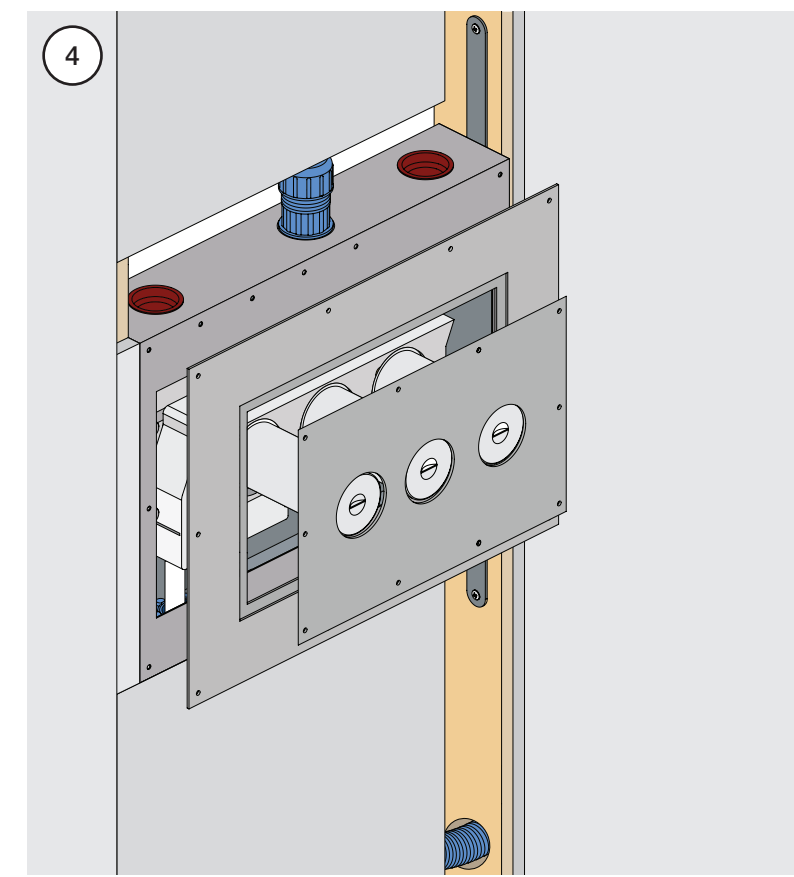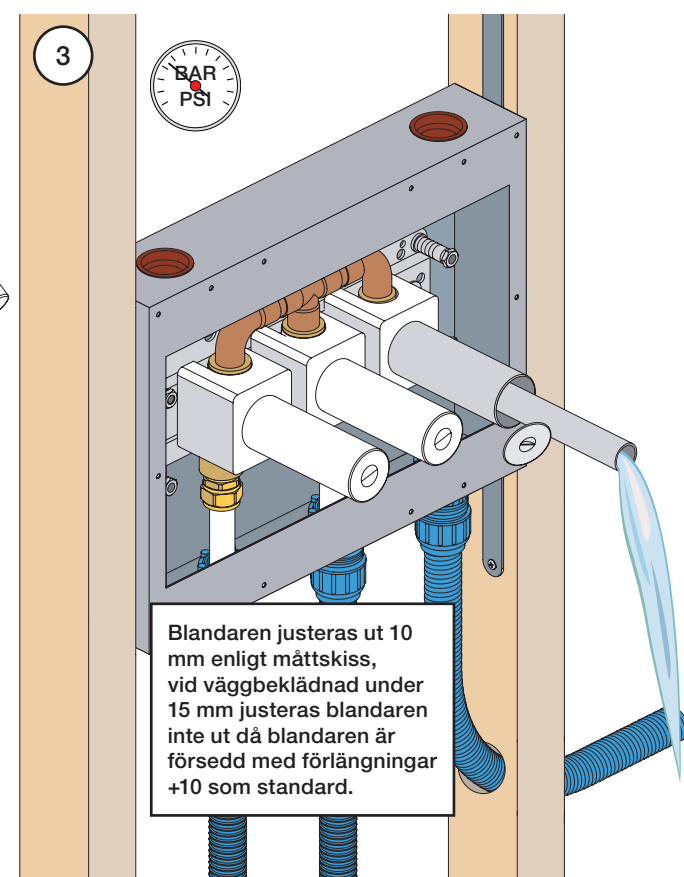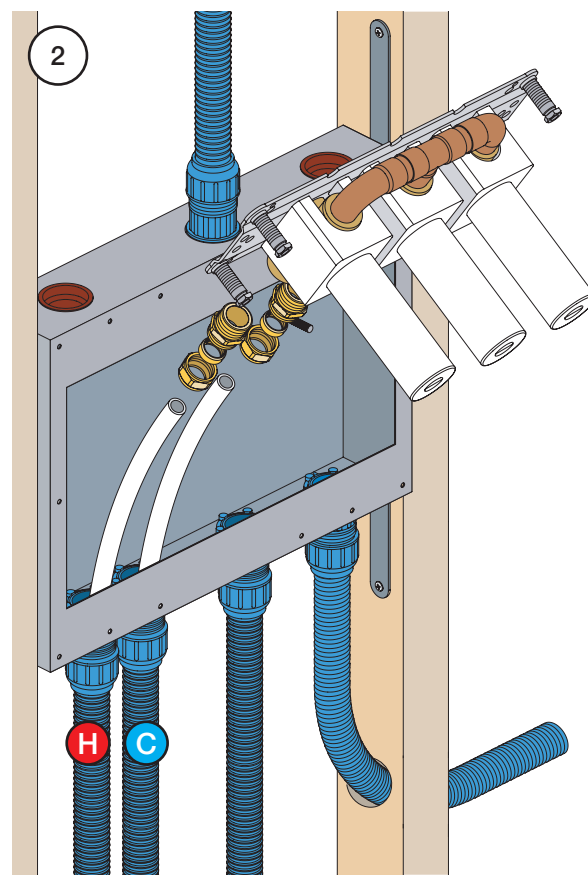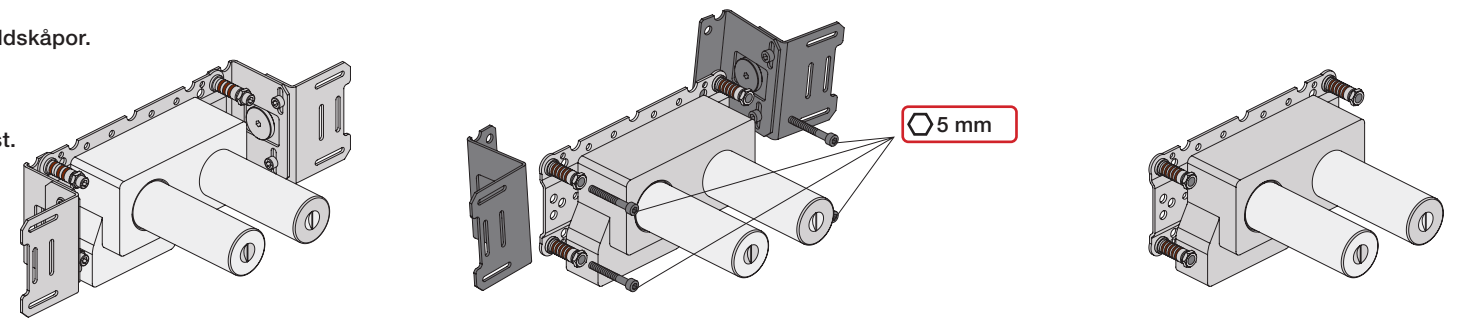

Blandaren justeras ut 10 mm enligt måttskiss, vid väggbeklädnad under 15 mm justeras blandaren inte ut då blandaren är försedd med förlängningar +10 som standard.

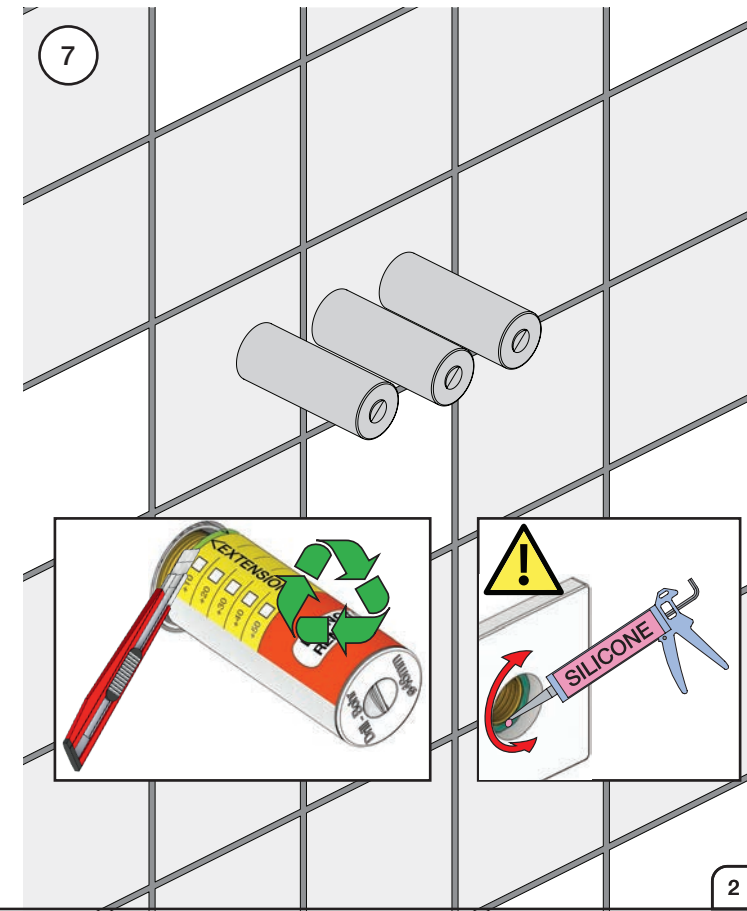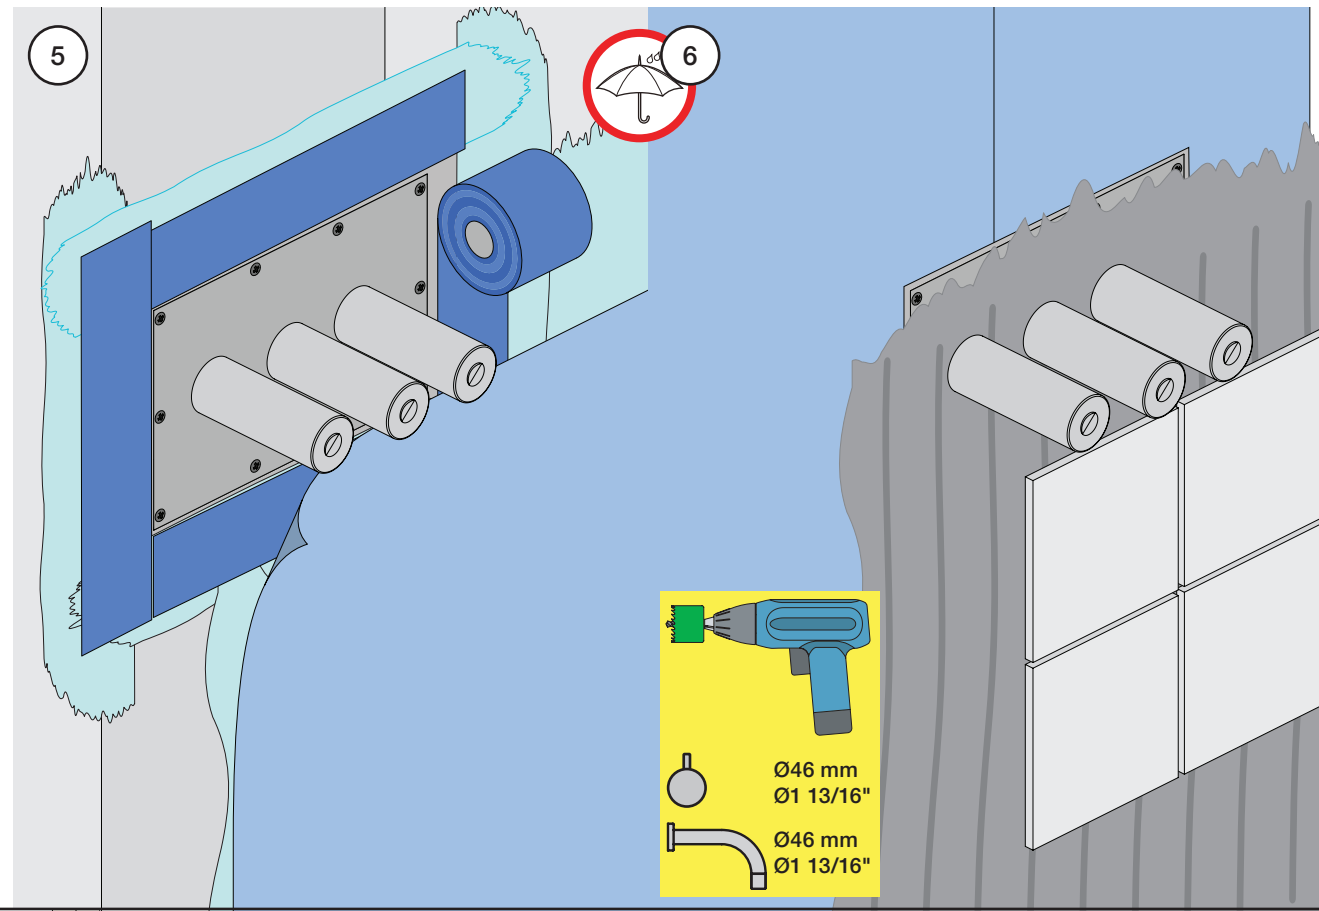

S21V

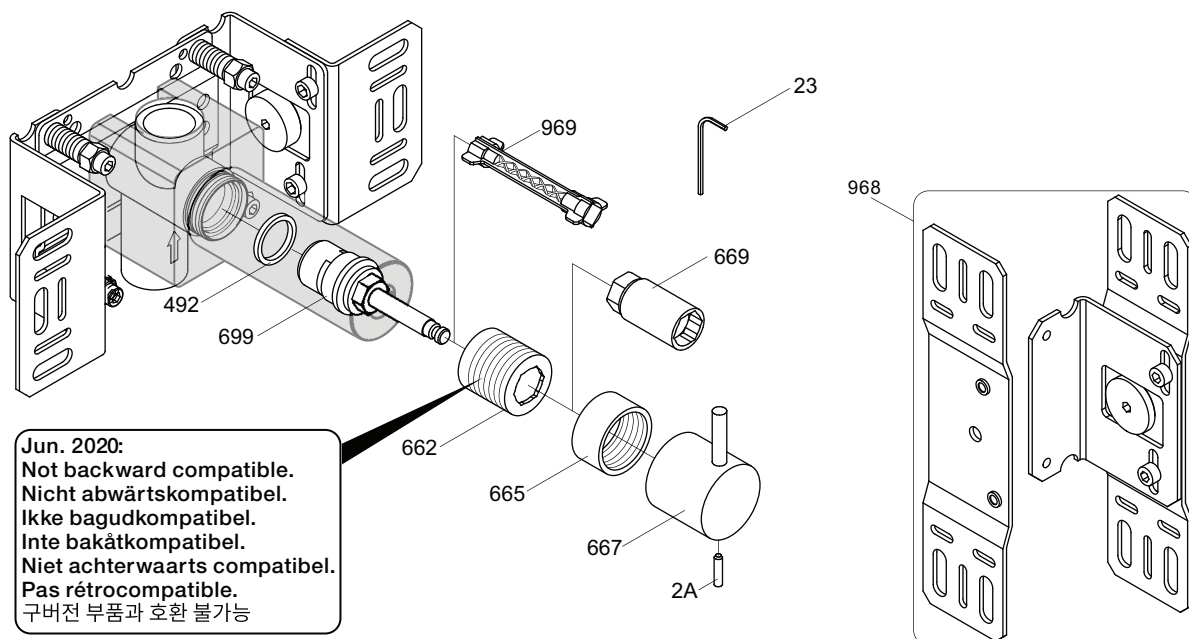

NR17: VR2A, VR23, VR665, VR667
 VR699K: VR23, VR492, VR669, VR699
 VR699K+: VR23, VR492, VR662+, VR669, VR699+

S21V 2928	S42V 2700V 2927	2600 2800V 2926	2900 2927
-	1034	003K	002
001G	2 x 001G	001, 2 x 001G	001, 001G
vola Lunavej 2 DK-8700 Horsens Tlf : + 45 7023 5500 sales@vola.com www.vola.com			Date May. 22 Rev. 3 Sheet SB 58
VOLA 2600 2700V, 2800V, 2900 S21V, S42V			