

Datum:

Kund:

Projekt:

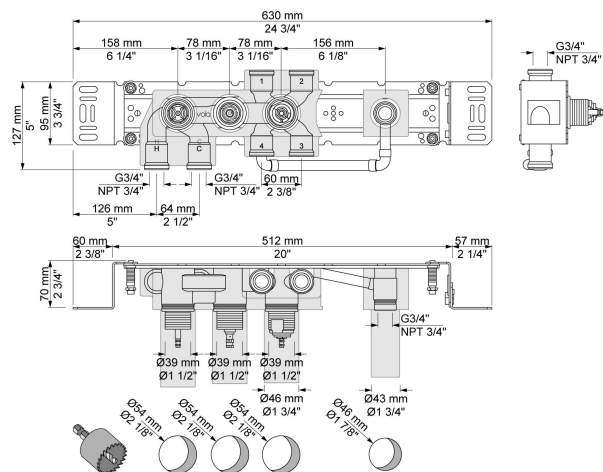


5400FVA4

4-vägs termostatblandare med ett fast utlopp. $\frac{3}{4}$ " anslutning för CU-, stål- eller pexrör.

Flöde

	Bar:	1,0	2,0	3,0	4,0	5,0
Utgång 1	(l/min)	18,5	26,1	32,0	37,0	41,3
Utgång 2	(l/min)	18,5	26,1	32,0	37,0	41,3
Utgång 3	(l/min)	18,5	26,1	32,0	37,0	41,3
Utgång 4	(l/min)	18,5	26,1	32,0	37,0	41,3
Cal Outlet 1	(l/min)	4,4	6,2	7,6	7,6	7,6
Cal Outlet 2	(l/min)	4,4	6,2	7,6	7,6	7,6
Cal Outlet 3	(l/min)	4,4	6,2	7,6	7,6	7,6
Cal Outlet 4	(l/min)	4,4	6,2	7,6	7,6	7,6

**Levereras i färg**

Färg 60, Svart	Färg 64, Borstad koppar
Färg 61, Borstad svart	Färg 65, Guld
Färg 62, Djupsvart	Färg 68, Silver
Färg 63, Koppar	Färg 70, Borstad guld